



VOL. IV.

No. 11

MODERN ELECTRICS



"THE ELECTRICAL MAGAZINE FOR EVERYBODY"

Copyright 1912, by Modern Publishing Co., 233 Fulton St., New York City.

INSULATORS from 1,000 to 1,000,000 VOLTS




INSULATION

Standard of the World


Adopted by U. S. NAVY

and all Commercial Wireless Companies

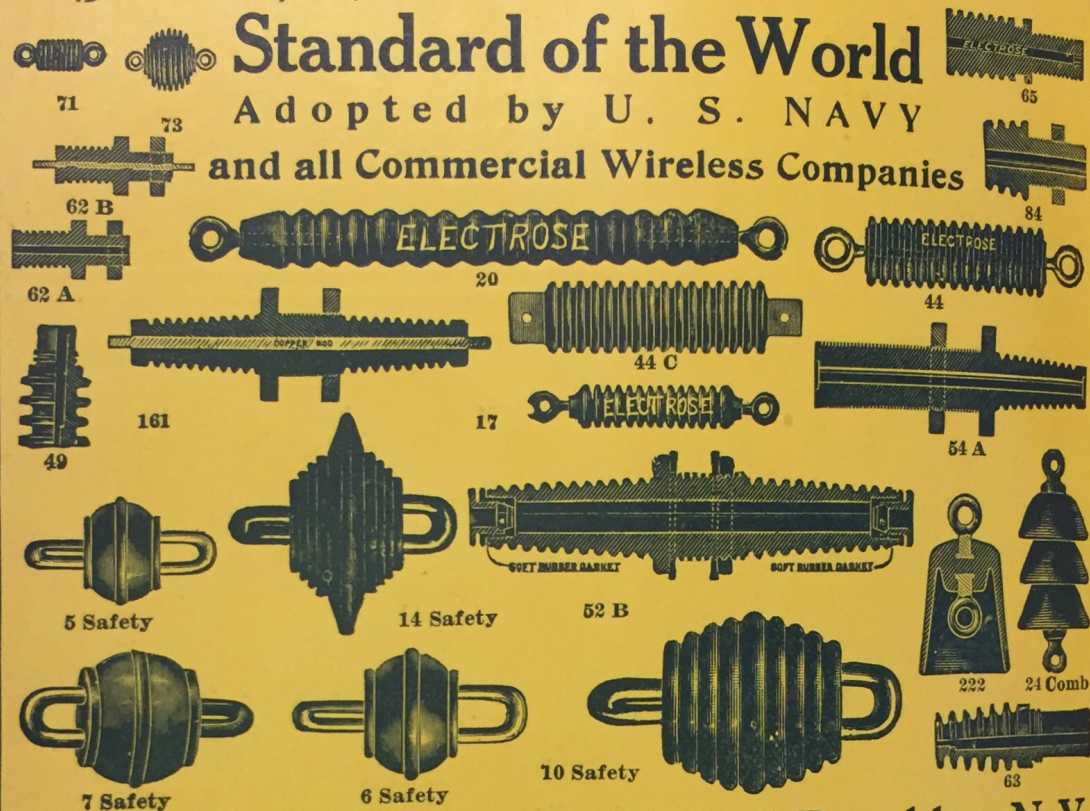

Electrose Mfg. Co., 129-139 N. 10th St. Brooklyn, N. Y.
132-242 N. 11th St.

WIRELESS COILS

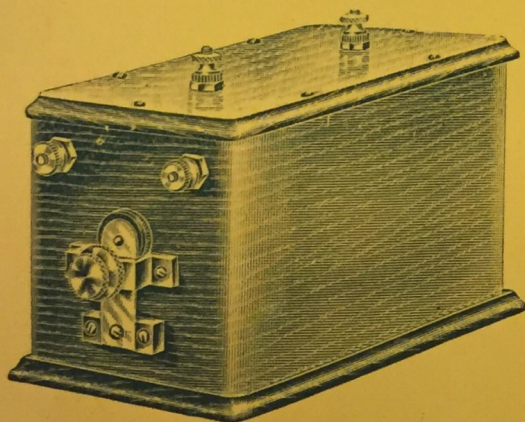

No better wireless coils made under any name or at any price. If you want the **BEST** insist on getting a **MESCO** WIRELESS COIL. Take no other for there is none "just as good."

Ask for our 88 Page Manual of Wireless Telegraphy and Catalog C1, with Prices and Description of these Coils and other Wireless Apparatus.

MANHATTAN ELECTRICAL SUPPLY CO.

NEW YORK
17 PARK PLACE

110 West 42d Street
37 West 125th St. BRANCHES



CHICAGO
114 S. Fifth Avenue
Jersey City, N. J.
Ravenna, O.
FACTORIES

Greater Speed — Greater Accuracy — Greater Efficiency
are the logical results of installing the

Underwood Typewriter



Underwood special purpose machines meet the particular needs of every business. Exclusive Underwood features make possible the most important labor-saving systems of modern accounting. The ever growing demand puts the annual sales of Underwoods far ahead of those of any other machine—making necessary the largest typewriter factory and the largest typewriter office building in the world.

Such a demand from business men everywhere is unquestionable evidence of the practical mechanical superiority of

"THE MACHINE YOU WILL EVENTUALLY BUY"

Branch Offices in all Principal Cities

Underwood Typewriter Co. Inc

UNDERWOOD BUILDING,

NEW YORK

—EVERY INCH GOOD—

Every spool of wire shipped to our customers or to our dealers is tested and guaranteed. It is ready for use when you get it.

If it isn't we will refund your money.

Every coil we sell is wound with the same guaranteed wire.

We use no scrap wire to lower the price.

If you want dependable coils—we will make them—or you can make them.

You will be amazed (as hundreds have been) with the results you can obtain with

RAVEN ENAMELED WIRE

ELECTRO IMPORTING CO.

233 Fulton St., New York



Supply Sales Department

Automatic Electric Co.

1001 W. VanBuren St., Chicago

A SCIENTIFIC SAFETY RAZOR WITH PERFECT BLADES

United Safety Razor Company



"Pocket" and "De Luxe" Sets



Extra Blades, Twenty-five Cents

Pocket Set, \$2.00

De Luxe Set, \$3.00

These sets are equipped with our new telescoping stropping handle, safety razor and ten blades in metal tubes. The Pocket Set is heavy nickel-plated, packed in a handsome black keretol case. The De Luxe Set is quadruple silver-plated, packed in genuine English Pigskin Case.

USR Standard Set, \$1.00

The USR Standard Set is the handsomest set ever sold at one dollar. The safety razor and separate stropper to match, full heavy nickel in Colonial Design, are packed in a flat square black keretol case with ten blades.

These safety razors are as good as any safety razor made and the blades are unequaled in quality.



Colonial Design

UNITED SAFETY RAZOR COMPANY NEW YORK

A SCIENTIFIC SAFETY RAZOR WITH PERFECT BLADES

United Safety Razor Company



"Your Advertisement is the truth"

Your "Blades have no equal"

A gentleman in Boston wrote this to us. He added that we might say as much for our Safety Razors. He is a very prominent man, the head of one of the oldest firms in that city and his name is known to thousands of men, women and children.


Our Safety Razors are good. They are up-to-date. They are scientific. With our excellent blades they do the work. They were designed for service and finished for show as well. We are *not ashamed* of their appearance. We are *proud* of their capability.

Examine a USR Safety Razor. Try the Blades

THE PRICE IS FAIR

UNITED SAFETY RAZOR COMPANY NEW YORK

FREE A Book of Valuable Ideas for Beautifying the Home

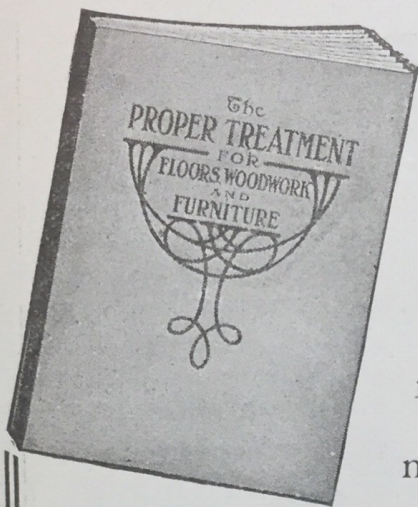

WE will send you *free* of charge our Book "The Proper Treatment for Floors, Woodwork and Furniture," two sample bottles of Johnson's Wood Dye and a sample of Johnson's Prepared Wax.

This text book of 50 pages is very attractive—80 illustrations—44 of them in color.

The results of our expensive experiments are given therein.

There is absolutely no similarity between

Johnson's Wood Dye

and the ordinary "stain." Water "stains" raise the grain of the wood. Oil "stains" do not sink below the surface of the wood or bring out the beauty of the grain. Varnish "stains" are not stains at all; they are merely surface coatings which produce a cheap, shiny, painty finish. Johnson's Wood Dye is a dye. It penetrates the wood; does not raise the grain; retains the high lights and brings out the beauty of the wood.

For artistic coloring of all woods in the following shades

- No. 126 Light Oak
- No. 123 Dark Oak
- No. 125 Mission Oak
- No. 140 Early English
- No. 110 Bog Oak
- No. 128 Light Mahogany
- No. 129 Dark Mahogany
- No. 130 Weathered Oak
- No. 131 Brown Weathered Oak
- No. 132 Green Weathered Oak
- No. 121 Moss Green
- No. 122 Forest Green
- No. 172 Flemish Oak
- No. 178 Brown Flemish Oak
- No. 120 Fumed Oak

Johnson's Prepared Wax

will not scratch or mar. It should be applied with a cloth; dries instantly—rubbing with a dry cloth gives a velvety protecting finish of great beauty. It can be used successfully over all finishes.

We want you to try Johnson's Wood Dye and Prepared Wax at our expense. Fill out the attached coupon being careful to specify the shades of dye wanted. We will mail you the booklet and samples promptly. Do not pass this page until you have mailed the coupon.


S. C. Johnson & Son

Racine, Wis.

"The Wood Finishing Authorities"

Please Use this FREE COUPON
I accept your offer of Free Booklet Edition M. E. 2 and two sample bottles of Johnson's Wood Dye. Send me shades No. 126 and No. 123 and one sample can of Johnson's Prepared Wax.

Name.....
Address.....

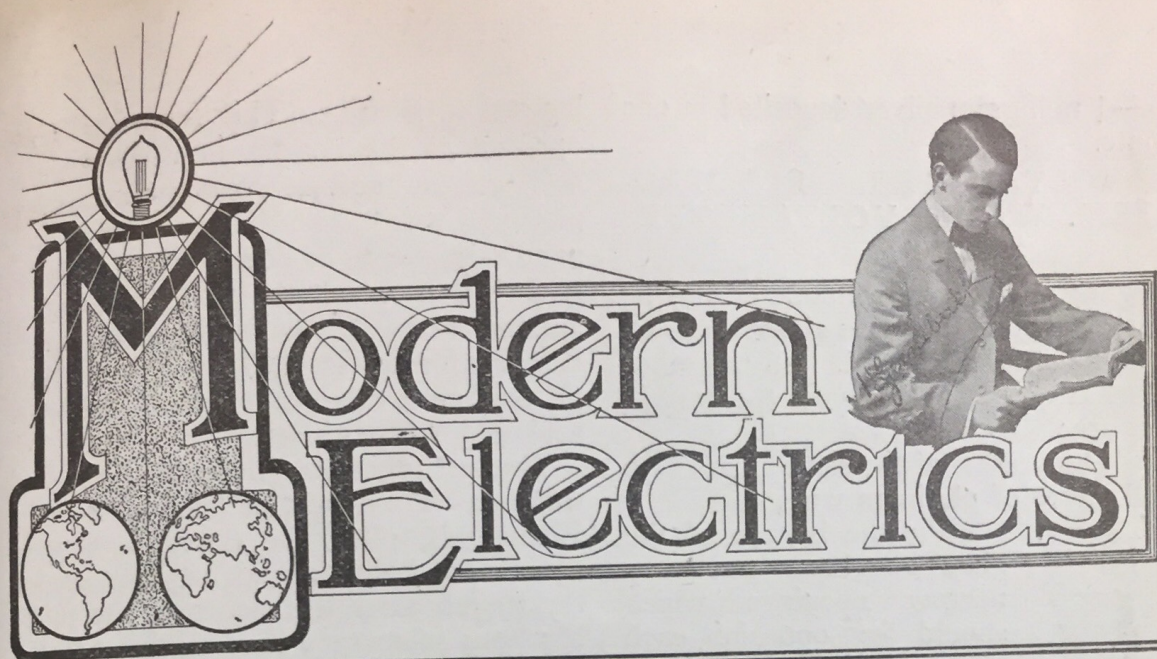

VOL. IV.

FEBRUARY, 1912

NO. 11

The Practical Electrician

A Popular Course in Electricity on the Construction of Electrical Apparatus and Experiments to be Conducted with them

By PROFESSOR W. WEILER, of the University of Esslingen, (Germany)
Translation by H. GERNSBACH

CHAPTER III.

61. MEASUREMENT OF CURRENTS. CURRENTS AND METHODS OF MEASURING SAME.

CURRENT intensity is the volume of electricity passing through a conductor during one second; it can only be measured in an indirect way, it being impossible to measure the volume of electricity passing through a conductor, in a manner as one measures the volume of water, or gas flowing through pipes.

To measure the intensity of a current in amperes, one has to take, as a basis, the chemical, magnetic, or mechanical effects, which the current produces in or around a conductor through which it passes.

1.—One weighs the quantities of a chemical substance which the current decomposes during a certain time.

2.—One determines the intensity of a magnetic field produced by the current, by measuring its effect on a movable magnetic needle or on a piece of soft iron.

3.—One measures the intensity of the force which a fixed current exerts upon a movable current.

62. CURRENT INTENSITY AND CHEMICAL EFFECTS.

Law of Faraday, 1833.—If a current

flows through a substance which can be decomposed, the weight of the decomposed particles is proportional to the volume of electricity which passed through it in a given time, and therefore, must also be proportional to the current intensity.

If m and m_1 are the weights of quantities of the same electrolyte, which will be reduced by currents of intensities I and I_1 during the same length of time, we have:

$$I : I_1 = m : m_1.$$

Keeping this law in mind we can, as a general rule, measure the current intensity by means of a voltameter if we assume as a unit, the current intensity I , which decomposes a certain amount of a substance, for instance water, in a given time, say, one minute. The best known chemical standards for measuring electricity are the following:

1.—1 cubic centimeter hydrogen and oxygen in a minute, that is, that current intensity stands for a unit which, in one minute, produces 1 cubic centimeter oxygen and hydrogen.

2.—1 milligram hydrogen produced in one minute.

3.—1 milligram water decomposed in one minute.

4.—1 milligram copper deposited in one minute.

5.—1 milligram silver deposited in one minute.

63. VOLTAMETER. ELECTROLYSIS. WATER VOLTAMETER 1835.

Figure 76.—A good voltameter may be made by anyone if a wide glass as shown in the illustration is used. All the other materials necessary to make the instrument are:

Two test tubes, of the same size. Two small pieces of platinum wire.



Fig. 76

Near the bottom of the glass one bores two very narrow openings which should be opposite each other. This may be done quickly by hand. A three-cornered needle file, having a very pointed end and which must be exceedingly sharp, is heated to a bright red heat and quenched immediately in iced water; the point becomes so hard that it could not be used to bore any metal. By means of this point, scratch a cross at the point where the hole is to be made. Lubricate the point well with camphor dissolved in benzine or turpentine. Move the point back and forward with a boring movement, and the point of the file will pierce the glass quickly.

When the hole is almost entirely through the glass, press with very little force and bore very slowly. Hold a small piece of wood against the inside of the glass which prevents large pieces from breaking out.

After the two holes have been drilled seal in the two platinum wires as shown in illustration, by means of wax, or better, Portland cement. After the cement has set, paint it with shellac or paraffine to keep the water from running out.

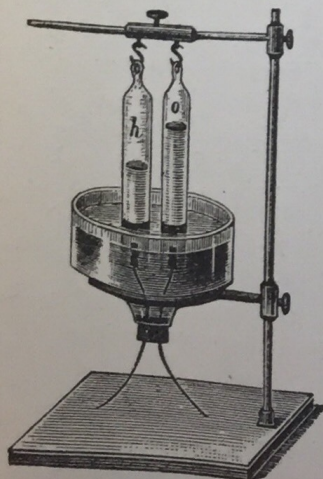


Fig. 77

Figure 77 shows another way of making a voltameter, and this does not necessitate any boring of glass, as the illustration shows.

A large glass funnel, supported by a ring attached to a stand as shown in il-

lustration, is used. This funnel has an opening at the bottom in which fits a soft rubber cork through which the platinum wires pass. The tubes are suspended by means of little hooks, as clearly shown in cut. Both of these two voltameters are used in the same manner. Either of them is filled with a solution of one part chemically pure sulphuric acid and 7.5 parts water.

The test tubes are filled with the same solution. They must be filled quite full. When full, place the thumb over the mouth of the tube and only withdraw the thumb after the mouth of the tube has been submerged beneath the surface of the electrolyte in the main glass vessel. If this is not done the electrolyte will run out of the test tube.

The positive electrode attracts the oxygen, the negative electrode, the hydrogen. The oxygen may be known by its power to support combustion. If a lighted match that is just on the verge of going out, is introduced into the test tube containing oxygen, it will burst into flame at once. The hydrogen may be known by its weak, blue flame which, however, is very hot.

To decompose water, at least three to four volts are necessary. This calls for three Daniell batteries or two Bunsen batteries or else two storage cells. The stronger the current, the quicker the decomposition of the water (Electrolysis) goes on. The term voltameter has been brought out because one can measure the intensity of the current after the rule:

The number of cubic centimeters of hydrogen and oxygen produced in one second, at a temperature of 20 degrees Celsius (Centigrade) and a barometric pressure of 725 millimeters, multiplied by five gives the current intensity in amperes.

One could, by means of another method, also weigh the gases thus produced; and while this may be done, the method is quite complicated, but we give here with the figures:

37 milligrams hydrogen, and 0.366036 grams, water, are the equivalents of 1 ampere hour. One kilogram of water, at ordinary atmospheric pressure and at ordinary temperature, gives 2 cubic meters oxygen and hydrogen.

A pretty experiment may be made as follows:

If one takes for electrodes, iron or nickel strips, attached as shown in Figure 77, and if one fills the glass funnel with soapy water containing a little caustic soda, to make the solution conductive, soap bubbles will be formed at the surface, containing a mixture of oxygen and hydrogen which is explosive. These bubbles may be ignited by means of a match and explode immediately, without however, doing any damage.


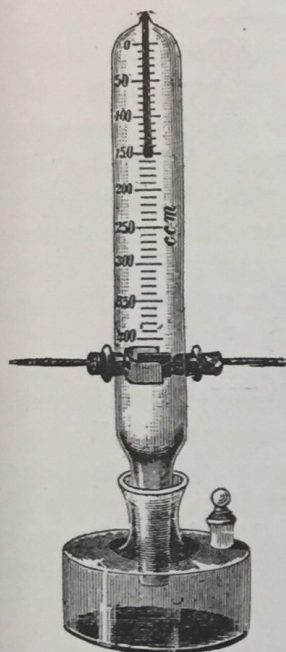


Fig. 78


Figure 78 shows the Kohlrausch voltameter. Two platinum electrodes as shown, are close together and these electrodes have an active surface of 15 square centimeters. With this instrument as shown currents up to 40 amperes can be measured. The small glass stopper on the right side is taken off while the apparatus is in use.

When the current intensity is very small only the hydrogen need be measured, inasmuch as the oxygen, on account of the production of Ozone, is absorbed by the water to a great extent.

The electric current decomposes the sulphuric acid in a watery solution after the equation



The free hydrogen (H) appears at the Cathode and SO_4 at the anode. SO_4 however cannot exist by itself but becomes $\text{SO}_3 + \text{O}$. But SO_3 combines immediately with the water and becomes sulphuric acid:



At the anode, consequently only oxygen will be formed. Therefore, as a matter of fact, it is really not the water which is decomposed but the sulphuric acid, and with the products of the decomposition of the sulphuric acid, in the presence of the water, it will be seen that new acid is always formed automatically. For this reason free oxygen appears at the anode and free hydrogen at the cathode.

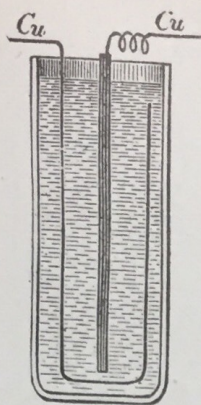


Fig. 79

Copper Voltameter. Figure 79 shows this. If we replace the acidulated water in the water voltameter, by a solution of copper sulphate (Blue stone) Cu SO_4 , the metal Cu travels to the negative electrode and the acid radical SO_4 , goes to the positive electrode and slowly dissolves the copper plate into Cu SO_4 ; thus the

solution does not lose anything. The result at the end gives the work done by the electric current in terms of the amount of copper that is transported from the anode to the cathode, upon which it is deposited.

The separate particles, the ions, on account of their chemical relationship and affinity, try to associate themselves again with each other and from this an E.M.F. is produced which opposes the outside current. *The magnitude of this electromotive force of polarization is dependent upon the nature of the body that is decomposed.* In order that electrolysis be possible, it is evident that the E.M.F. of the outside electrical source must be greater than this counter E.M.F.

A single Daniell battery cannot decompose water. As stated above, at least three such batteries or two Bunsen batteries are necessary. The metal which is deposited molecule by molecule, at the cathode takes the form and impression of the latter, and if, after a while, the deposit is peeled off, it will be found that it is a true impression of the negative electrode. This phenomenon has brought about the invention of the galvanoplastic, invented in 1839 by Jakobi and Spencer.

The quantities which a current of one ampere deposits in one second are termed electrolytic or electrochemical equivalents.

If now one wishes to measure a constant current one simply places in series with it a copper voltameter whose electrodes are platinum or copper strips. In order to increase the conductivity of the electrolyte composed of a solution of concentrated sulphate of copper and water, one adds to it about 5 per cent. of sulphuric acid. After the current has

passed through the voltameter for a certain time, a copper deposit appears on the negative plate; this is well washed and cleaned and carefully dried. The deposited copper is then weighed and is termed Q . This weight is expressed in milligrams, and this figure is divided by the number of seconds, t , and by 0.3284:

$$I = \frac{Q}{0.3284 \times t} \text{ Amp.}$$

Figure 80 shows the Lippmann galvanoscope which is a very sensitive indicator to show the presence of electricity. This instrument is made as follows:

Procure a glass vessel with as thin walls as possible. The shape should be preferably as shown. If this cannot be had, a vessel with straight walls will do.

Next get a piece of glass barometer tubing with fairly thin walls, not thicker than $1/32"$. The bore should be about $1/16"$. Supply houses usually carry such tubes. Bend the tubing in an alcohol flame to a right angle. Draw the shorter piece out to a fine point by means of an alcohol or other hot flame. Break off the point so as to leave an extremely fine opening in the tube. This aperture should be so fine that it cannot be distinguished with the naked eye.

Now put into the vessel enough mercury to cover the bottom of same. On top of this pour electrolyte prepared by adding 1 part of sulphuric acid (oil of vitriol) to 10 parts of water. (Oil of vitriol *must* always be poured into the water, never vice versa, as an explosion might occur.)

Now fill the finished tubing with mercury about half-way up. Bring the upper part of tube through a cork, into which it should fit tightly.

A silver or platinum wire goes through the cork down to the bottom of the vessel to make contact with the mercury. A similar wire is then introduced in the open part of the tubing to make connection with the mercury.

If the two outleading wires are now connected to an old, nearly worn-out dry cell, the thin capillary thread of mercury in the fine point changes its position. The thread will move a greater distance the stronger the current is. Too high

a voltage squirts the mercury out through the fine aperture. Too much mercury in the tube has the same effect.

If carefully built this excellent instrument will record a pressure of $1/300$ volt. It works on both direct and alternating currents.

It is as sensitive as a good many instruments costing \$10 and higher and will last for a long while.

(To be Continued.)

"THE OREGON STATE WIRELESS ASSOCIATION."

This club was recently organized in Portland, Ore., and the following officers elected: Charles Austin, president; Joyce Kelly, recording secretary; Edward Murray, sergeant-at-arms; Clarence Bischoff, Lents, Ore., treasurer and corresponding secretary.


The object of the club is the prevention of interference; also to help each other in any way possible.

I would like very much to hear from the Corresponding Secretary of any other Wireless Club in order that we might exchange ideas for the betterment of each of our respective clubs.

CLARENCE BISCHOFF,
Corresponding Secretary.

NOVEL WIRELESS SET.

Here is a wireless set for transmitting signals through the earth. As will be seen from the diagram the sending set consists of a steam hammer; while the receiving set is a seismograph, the tremors of which swing a pivoted mirror, M, to throw a beam of light upon

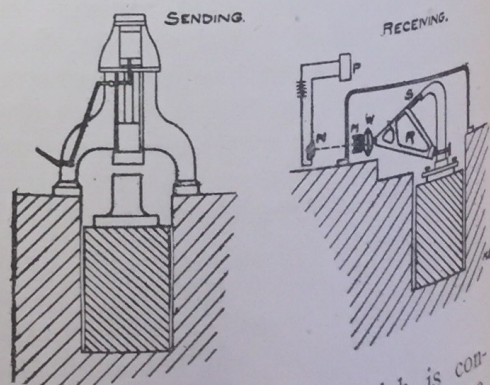

the selenium cell, N, which is connected with the battery and telephone. P, by means of which, the signals are read. R, is a swinging pendulum, S, a flat spring controlling the motions of R, and W, a weight on the end of R.

The Quenched Spark

By C. A. LeQuesne, Jr.

MOST operators have, no doubt, noticed that stations using the ordinary spark gap, can be heard in two places on their tuners, in other words, these stations each seem to have two different wave lengths at the same time. In reality there are two waves present, even when the aerial and condenser circuits are tuned to exactly the same wave length, and neither wave is that to which the two circuits are tuned. This double wave results from an interchange of energy between the condenser and aerial circuits. Following the initial discharge of the condenser, the primary (condenser) circuit starts oscillating, the oscillations increasing to a maximum value, at which point the secondary (aerial) circuit begins to oscillate and gradually increases to a maximum. Meanwhile the primary

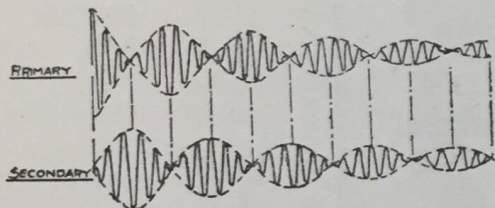


Fig. 1. Ordinary Spark.

oscillations are decreasing in value and become zero at the time the secondary oscillations reach their maximum. The primary then begins oscillating again, as before, but the energy necessary is not supplied by the power transformer but is taken from the aerial circuit, which causes the secondary oscillations to die down to zero at the time the primary oscillations reach their second maximum, which, however, is lower than the first. This is illustrated in Fig. 1.

This interchange of energy continues until the oscillations of both circuits decrease to a point where the current in the primary circuit is no longer able to jump the spark gap. Then the oscillations in the secondary circuit slowly die out but are too feeble to radiate much energy from the aerial. The result of this is that the aerial circuit, instead of radiating a strong train of waves for each dis-

charge of the condenser, radiates a number of short wave trains whose aggregate value is much below that of a single long, slightly damped wave train that would result if the oscillations in the primary circuit be stopped just as soon as the secondary oscillations reach their maximum value. See Fig. 2.

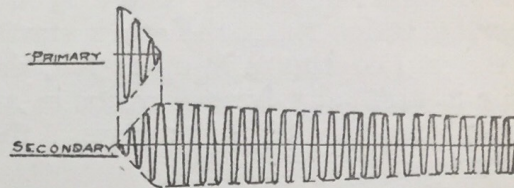


Fig. 2. Quenched Spark.

In order to radiate the most energy from the aerial, it is essential that the primary remain active only long enough to build up the secondary oscillations to a maximum. If, at this point, the spark gap can be made to lose its conductivity, the energy in the secondary will not be lost in again setting the primary oscillating again, but will be radiated from the aerial.

There are several forms of spark gap which possess this desirable property of promptly damping out the primary oscillations. The most widely known is probably the rotary gap introduced by Marconi, then there are the *quenched gaps* of von Lepel, Penkert, the Telefunken Company, and others, which operate on the principles first made known by Professor Max Wien in 1906, and the mercury vapor discharger of Cooper-Hewitt.

The rotary gap is so well known

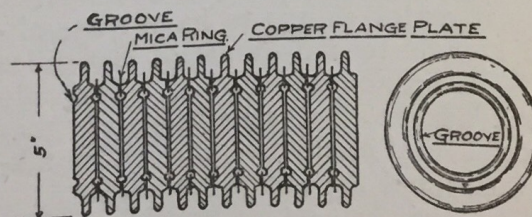


Fig. 3

that no further mention will here be made of it.

The Cooper-Hewitt mercury vapor discharger is similar to the tube in a mercury-arc rectifier, and, while very

efficient as a quenched spark gap, must be maintained within rather narrow temperature limits while in operation. It cannot be constructed without the use of appliances usually found only in an up-to-date incandescent lamp factory, and, as it is expensive, it is beyond the means of most experimenters.

The von Lepel gap consists of two massive copper discs, either solid or water cooled, separated by a sheet of paper about 0.01 inch thick. A small hole is punched in the center of the paper, in which space the spark starts. As the gap continues in operation, the paper is gradually burned away in an atmosphere devoid of oxygen, the products of

combustion together with the cooling of the gap serving to quench the spark at the proper time. A groove cut around the faces of the discs near the edge prevents the sparks from burning their way out to the edges. This gap will work on either direct or alternating current of 300 to 500 volts and

consumes from one to two amperes. The inventor claims to have transmitted signals to a distance of 300 miles with less than one-half k.w. The only disadvantage in using this gap is that after several hours' use, it must be taken apart and the paper renewed.

The Peukert gap consists of two parallel copper discs and is made in two forms: one, in which both discs revolve, in opposite directions, in a bath of oil; in the other form only one disc revolves and oil is introduced into the space between the discs through a duct in the center of the stationary disc. This disc is movable,

axially, to adjust the length of the gap which is about $1/250$ inch. The rotation of the other disc, which revolves at about 800 R.P.M., throws the oil out centrifugally, thereby keeping a fresh supply of oil in the gap. The Peukert gap operates on direct current at 600 to 700 volts, but good results may be had on 400 to 500 volts. The current should not be above 4 amperes. The oscillations occur in a practically continuous train and are suitable for wireless telephony. If a musical tone is desired one of the discs should be slotted.


The Telefunken gap is, perhaps, the best known of all the quenched gaps and consists of a number of short, air

cooled gaps in series, and is illustrated in Fig. 3. It consists of a number of double faced, flanged copper discs separated by mica rings 0.01 inch thick. The number of gaps used at any time depends upon the voltage used, the usual allowance being 1,200 volts per gap.

Another form of this gap, designed by Mr.

Eugene Peterson, of Ithaca, N. Y., employs a number of single faced discs assembled in pairs, the discs of each pair separated by mica rings as in the Telefunken type, but with an air space between the successive pairs. This is effected through the use of metal spacer blocks. Separating the successive pairs in this manner, results in greatly increased cooling surface without the use of large cooling flanges, and increases the efficiency of the gap.

It is claimed that with the von Lepel gap 60 per cent of the energy supplied to the gap will be radiated while the Telefunken people claim 75 per cent

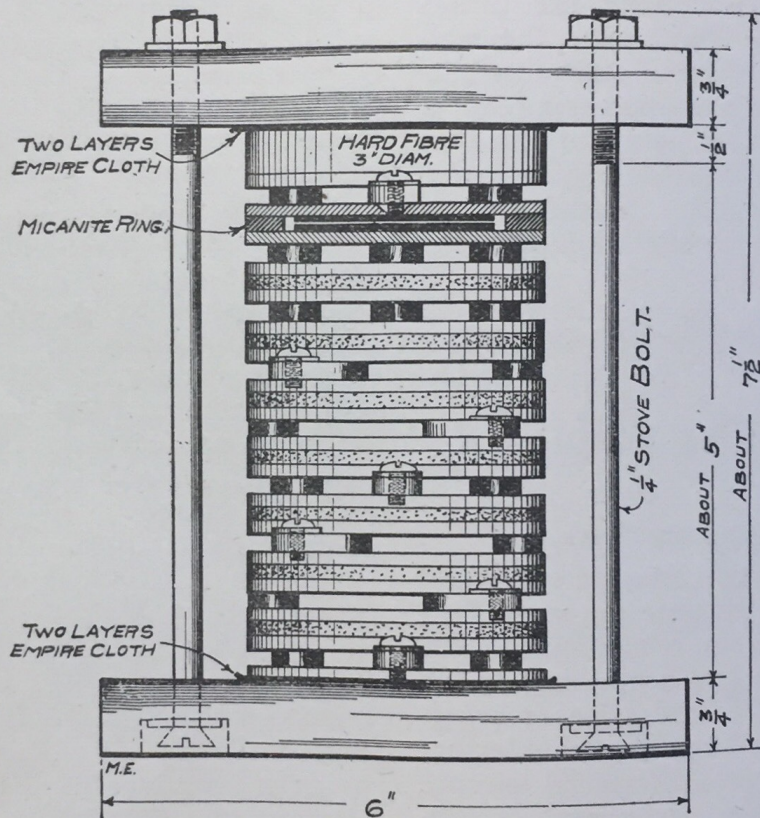

-FIG. 4-

for their gap. Efficiency figures for the other gaps are not available.


It has often been stated that the various types of quenched spark gaps produce high pitched musical notes. *They do so only when supplied with power from a high tension D.C., circuit, or from an A.C., transformer.* When used in connection with induction coils or open core transformers supplied with direct current, the pitch of the spark will be the same as the tone emitted by the interrupter. When used on low frequency alternating current usually several sparks per alternation occur, and the tone is mushy. It should also be borne in mind that the capacity of the sending condenser should be decreased in the same proportion as the number of discharges per second is increased. These points are usually overlooked by most experimenters who wonder why their rotary or quenched spark gaps fail to produce the high, clear, musical spark they expected to obtain.

Figures 4, 5, 6, and 7, illustrate a form of quenched spark gap, suggested by Mr. H. Gernsback, that may be readily constructed by anyone handy with ordinary tools. For the frame, there will be needed: A hard wood base and top of any shape that suits the builder, a block of hard fibre 3 inches in diameter and $\frac{1}{2}$ inch thick, four discs of empire cloth $3\frac{1}{2}$ inch diameter, and two $\frac{1}{4}$ inch stove bolts 8 inches long with two washers each.

For the gap itself there will be required. 18 round brass discs 3 inches diameter and $\frac{1}{8}$ inch thick, 16 round copper or silver discs 2 inches diameter and $\frac{1}{16}$ inch thick, 8 micanite rings 3 inches outside diameter, 0.135 inch thick, and $\frac{3}{8}$ inch wide, 20 round brass spacer blocks $\frac{1}{2}$ inch diameter and $\frac{3}{16}$ inch thick, 7 brass lugs $\frac{1}{2}$ inch wide $\frac{3}{16}$ inch thick and $1\frac{1}{4}$ inches long. The discs may be cut from sheet metal and the lugs and spacer blocks may be made from rod stock. In addition there will be needed seven $\frac{1}{2}$ inch brass or copper washers with hole to pass No. 8-32 machine screws, also seven No. 8-32 brass round head machine screws $\frac{3}{8}$ inch long.

The only part of the work which is at all difficult is the construction of the discs; but this may be done with-

out much trouble by the following method: Thoroughly tin one side of each of the smaller discs and the corresponding face of each of 16 of the

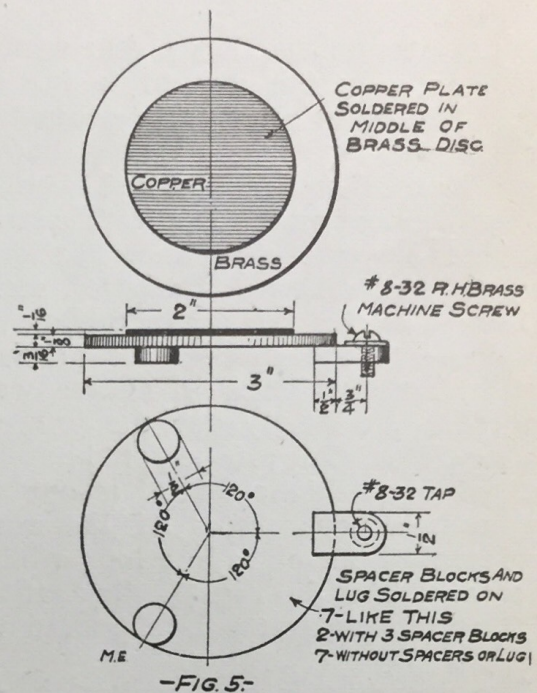


-FIG. 5-

brass discs. Lay each small disc on the middle of one of the brass discs, (with the tinned sides facing each other), heat until the solder melts, then press firmly together and allow to cool while still under pressure. Seven of these composite discs are now finished as far as soldering is concerned, and may be laid aside.


Two of the remaining discs should have three of the round spacer blocks soldered on the back, spaced equally

MICANITE RING 0.135 THICK



-FIG. 6-

BRASS PLATE $\frac{1}{8}$ THICK



-FIG. 7-

around the edge; and the other seven should have two spacer blocks and a connecting lug soldered on as shown in Fig. 5. To do this soldering without loosening the copper or silver discs, place the brass disc (with the copper or silver face down) on a block of wood protected by a sheet of asbestos, then clamp it there by means

(Continued on Page 795.)

A New Electric Fake

THE illustration below shows a new electric fake by which a concern in Pennsylvania exploits unsuspecting prospectors.

A prospector from Texas sent us the apparatus with the request to install a new battery in same. We promptly notified him that we did not know what the machine was for, and he told us that the apparatus is the "Electric Simplex Meter for locating various kinds of minerals, lost treasures, etc." Inasmuch as this was a new one on us we wrote to the concern for printed matter, and our letter of course was ignored. We finally got the printed matter from the prospector himself, and we must admit that it is one of the most curious pieces of literature that reached our office in a long while. We re-produce in Fig. 1, illustration of how the apparatus is supposed to work.

The apparatus is nothing but an ordinary nickel-plated buzzer mounted on a nickel-plated tube, which contains a common tubular flash light battery. The adjusting screw 2 is mounted on a bracket which is supported at the bottom by a spring. It is evident that if any pressure is exerted on the spring, at the bottom, contact will be made

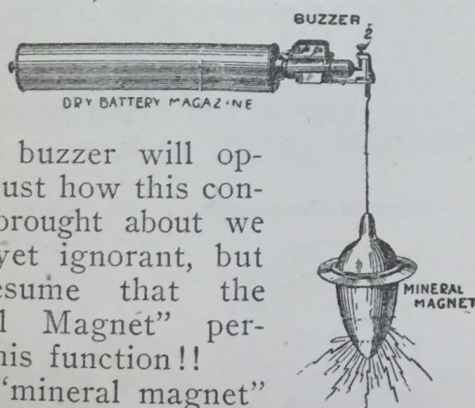


Fig. 1

and the buzzer will operate. Just how this contact is brought about we are as yet ignorant, but we presume that the "Mineral Magnet" performs this function!!

This "mineral magnet" is supposed to start in jerking the string as soon as it comes near a lost treasure, presumably out of sheer excitement. It will also act in the same manner for other minerals. Our photograph shows the apparatus without the famous "mineral magnet" attached. Below we give a few bits from the circular which are worth their weight in gold.

"The reason our instruments are the best and most sensitive, is that the mineral magnets are composed of the latest discovered and deepest earth

penetrating magnetic composition known to electricians and mineralogy science. We guarantee our instruments to be the best and most perfect instruments ever invented for prospectors seeking mines and hidden treasures. All our mineral magnets are made on a scientific basis, they are hollow, filled, charged and sealed with each affinity, (? !!) Electro Magnet mineral which produces the proper attraction for locating any of the above named minerals.

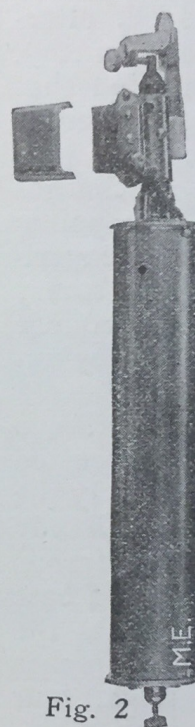


Fig. 2

"To make location without instruments the prospector takes hold of the electric light battery magazine with both hands as described in illustration, holding it directly in front of him and as level as possible, following in the direction in which the mineral magnet leads, and as soon as the deposit is reached the magnet will have a downward attraction, which will cause the electric buzzer to make a continuous noise, incidentally showing the exact location.

"We guarantee our instruments to attract about 2,000 yards, and to the depth of from five to eight feet according to the condition of the soil and the richness of the deposit."

The concern furthermore states that the price of the "Electric Simplex Meter" is \$50.00 cash, but in the same breath, it goes on and says that it will let any prospector have the meter for \$15.00 with the understanding that he will pay \$50.00 every time he makes a successful paying location!!

That anyone person in his right senses should buy this contrivance is more than we can understand. It does not seem to enter these poor prospectors heads that if the thing really were any good the man who makes it would go prospecting himself.


However, as long as the people want to be fooled and are willing to pay for it, we presume we have no right to complain.

The Marconi Valve Receiver

THIS month we present a photograph and wiring diagram of the new Marconi Valve Receiver, the new tuner employing the Fleming Valve instead of the magnetic detector. Most of the important Marconi land stations and many of the trans-Atlantic steamers are now fitted with this tuner as regular equipment, with the multiple tuner, described last month, and the magnetic detector for a second set.

Inside the case are placed two inductive tuners of the rotating ball type, a protective choke coil, a loading coil, variable by steps, a close coupled jigger for use when standing by, and two fixed condensers.

On top of the case are mounted two

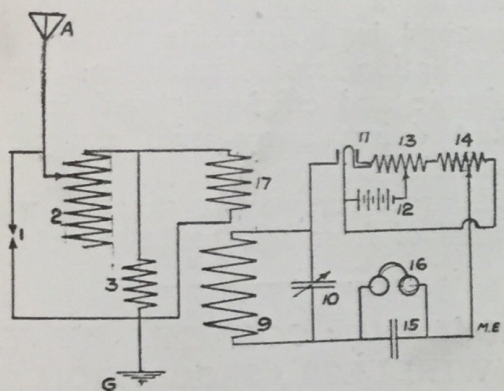


-FIG. 1-

Fleming valves with a SPDT switch to connect either one in circuit, two rotary and one sliding tube variable tuning condensers, a micrometer spark gap and a DPDT switch to connect the tuner for accurate tuning or for standing by, by which is meant that signals of widely varying wave length can be heard simultaneously. On the left end are a potentiometer for varying the voltage in the telephone circuit and a rheostat for varying the heating current in the filaments of the Fleming valves. The handle on the front cuts in the loading coil, step by step, and the handle on the right hand end varies the coupling of the inductive tuners by rotating the secondaries with respect to the primaries.

The rotary condensers are the same as used on the multiple tuner. The sliding tube condenser, which is used to tune the detector circuit has a very

small capacity, has ebonite instead of air as the dielectric, and, being operated by a screw with milled head is capable of very fine adjustment.


In this tuner, unlike the multiple

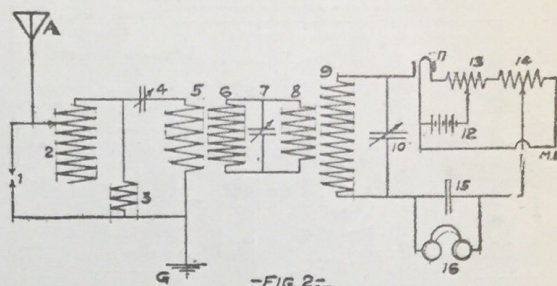

-FIG. 2-

tuner, the coils of the loose couplers are not variable, and all the tuning is done by means of the variable loading coil, the variable condensers, and by varying the coupling between the primaries and secondaries.

Fig. 1 is a simplified diagram of the "stand by" connections, Fig. 2, that of the "tuned" connections, while Fig. 3, is the complete wiring diagram. In Figs. 1 and 2, 1 is the spark gap, 2, the loading coil, 3, the protective choke coil, 4, the aerial tuning condenser, 5

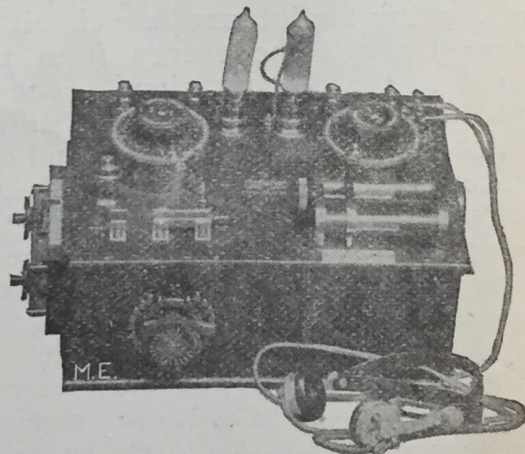

General View of Receiver.

and 6 primary and secondary of first loose coupler, 7, intermediate tuning condenser, 8 and 9, primary and secondary of the second loose coupler, 10, valve tuning condenser, 11, Fleming valve, 12, valve and receiver battery, 13, lamp rheostat, 14, potentiometer, 15, a fixed condenser (0.002 mfd), 16, telephones, 17, "stand by" primary which, used in connection with the secondary, 9, gives a very close, non-adjustable

coupling of the aerial and detector circuits.

It will be noticed that, as in the multiple tuner, an intermediate circuit is introduced between the aerial and detector circuits. The advantage of having this arrangement will be apparent when it is considered that even with all

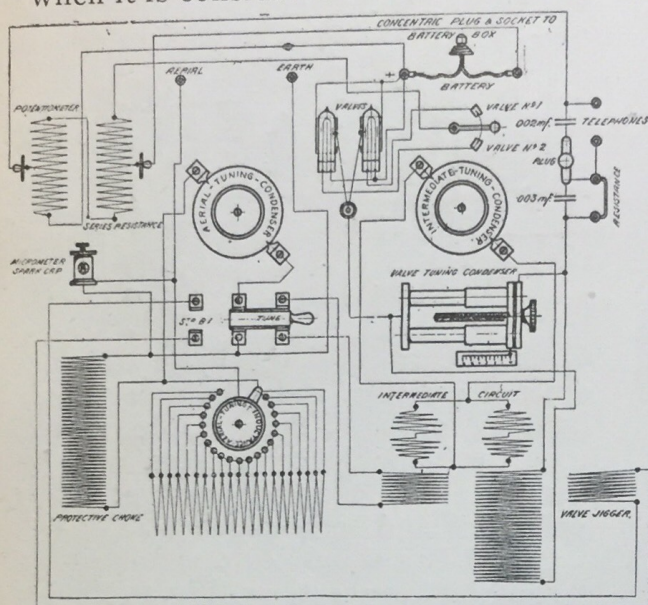


Fig. 3

the advantages the variables give, there is no one circuit in the whole receiver which has its damping capable of being reduced as much as required. By introducing the intermediate circuit to carry through the energy from the aerial to the detector circuits, one is able to produce the necessary difference of impedance to waves in and out of tune, impossible in the aerial and detector circuits alone, where the damping is already necessarily great, and this gives the receiver greater power to differentiate between signals of slightly differing wave length. In other words, the introduction of the intermediate circuit gives the receiver greater selectivity and freedom from interference.

If high resistance telephones are used they are connected to the binding posts marked "Telephones" in Fig. 3. Sometimes, however, a step down telephone transformer is used in connection with a pair of 75 ohm telephones. In this case the plug near the telephone binding posts is removed which opens the circuit between the two fixed condensers. The fine

winding of the transformer is connected to the telephone binding posts and the coarse winding is connected to the telephones. Information concerning the telephone transformer is not available at this writing, but Fleming is responsible for the statement that a ten inch spark induction coil is used. It is claimed that with the transformer and low resistance telephones, better results are obtained than with the best high resistance phones obtainable.

When the receiver is not fitted with a potentiometer, one of a set of high resistances furnished is connected to the binding posts marked "resistance" (Fig. 3), in place of the short circuiting bar shown.

The aerial and earth terminals are not connected directly to aerial and earth, but are usually connected across a very short gap in the ground lead from the transmitting oscillation transformer, making a simple and efficient "break in" set and doing away with the aerial switch.

This receiver may be tuned to wave lengths of from 600 to 1,600 meters.

ROCKLAND COUNTY, (N. Y.), WIRELESS ASSOCIATION.

The following officers were elected at a recent meeting of the R. C. W. A.: President, W. F. Crosby; vice-president, Tracey Sherman; secretary, Marquis Bryant; corresponding secretary, E. B. Van Houten.

Meetings are held the first Friday in every month, and anyone interested in wireless is welcome to attend.

Address all communications to, E. B. Van Houten, 24 De Pew avenue, Nyack, N. Y.


ATTENTION AMATEURS.

All amateurs between the ages of 14 and 16 residing on Washington Heights, and who would like to organize a Wireless Club please write to,
MARTIN J. DWYER, JR.,
3800 Broadway, near 158th St.,
New York City.

ELECTRIC DRIVE FOR THE EARTH.

While it has never been demonstrated that interstellar space offers any resistance to the motion of ponderable bodies and it is consequently doubtful whether any motive power is necessary to keep celestial bodies in motion, nevertheless theories have occasionally been advanced to account for the motion or rotation of such bodies. At least there must have been some force in play at the time when such motions were first started up.

The accompanying illustration of a

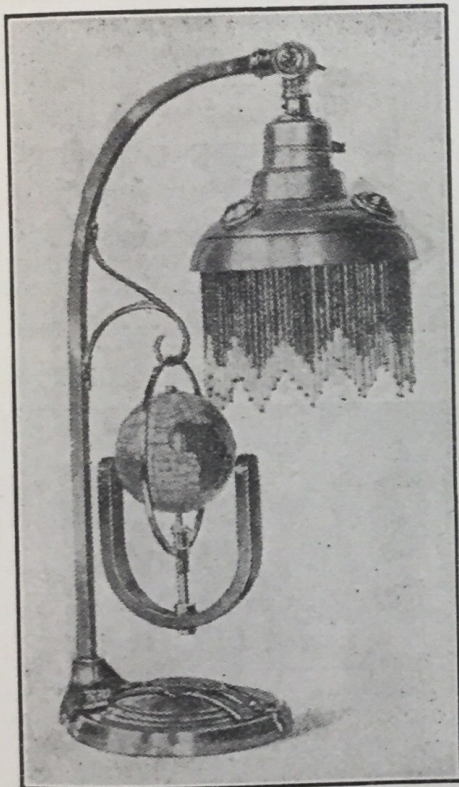


Globe Imitates Earth.

model prepared by Peter W. Sothman illustrates one theory which might account for the rotation of the earth. The model consists of a globe made up of two metals in which thermo-electric currents are caused to circulate when one side of the globe is heated. The heating effect is produced by the presence of a lamp whose radiation takes the place of sunlight. A magnetic field is necessary to produce motion on this hypothesis and it is supplied in the model by a U-shaped magnet. The magnetic field thus produced is approximately horizontal while the motion takes place around the vertical axis. The permanent magnet and the thermo-electric currents

provide the two necessary requisites of an electric motor. The model makes about four revolutions per minute.—*Western Electrician*.

BELL'S FIRST TELEPHONE.

The accompanying illustrations, which we are able to reproduce through the

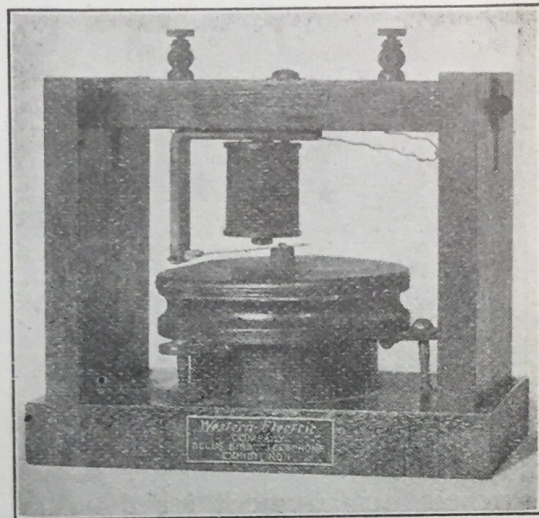

Bell's First Telephone.

courtesy of the Western Electric Company, show Professor Alexander Graham Bell's telephone in its early form.

Nowadays we would have nothing to do with such cumbersome receivers as these, but the ones we use in our every day business life operate on exactly the same principle embodied in those shown here. A comparison between our modern compact and efficient instruments with these bulky pieces of apparatus gives but a slight




How the First Telephone Was Used.

idea of the vast improvements that have been made in the telephone art in the few years since Prof. Bell first made known his discovery.

Paris Letter

ELECTRICAL WATER TESTER.


Here is a simple electrical water tester made by Evershed & Vignols

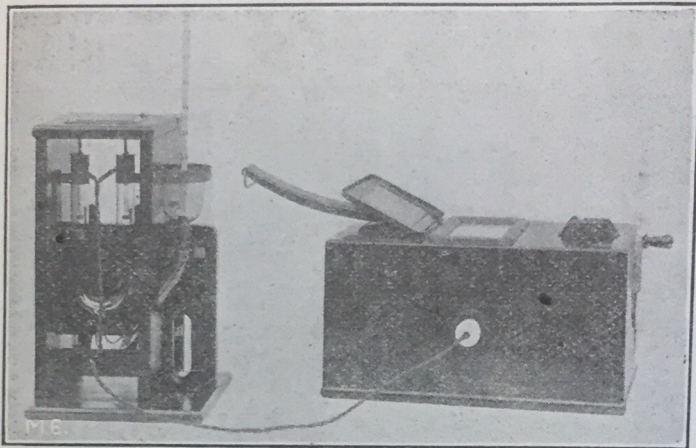

General View of Water Tester.

of London, which substitutes a simple electrical measurement for the elaborate chemical analysis usually gone through to determine the purity of a sample of water.

The apparatus to the left is filled with the water to be tested, a crank on the box at the right is turned, and the reading of the electric meter in the same box is noted. Reference to a table of conductivities, furnished with the instrument, at once determines its

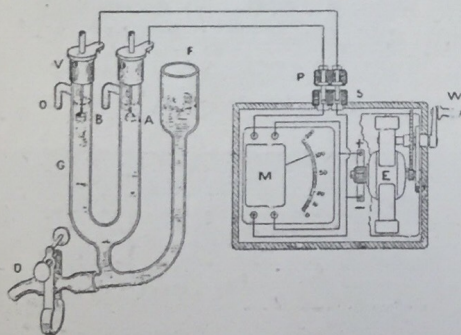

purity. The connections of the instrument are also shown in the diagram.


AN IMPROVEMENT IN SPARK GAPS.

M. Paul Jégou, a Frenchman, has announced a discovery that should be of interest to all who operate wireless stations. He has discovered that if one of the electrodes of the spark gap be surrounded by a turn of wire that is close to but does not touch same, the maximum length of the

spark gap may be nearly doubled and that arcs will not form in the gap, a trouble to which most ordinary gaps are subject. When the gap is composed of spheres, or cylinders placed end to end, the wire is in the form of a circle while when the cylinders are side by side it should have a rectangular form. The wire while it does not actually touch the electrode it surrounds, must be electrically connected to it, and the plane of the ring must be at right angles to the length of the gap.

THE DUCTER.

The illustration shows, in use, a new instrument, known as the Ducter, which measures electrical resistance by the well known voltmeter and ammeter method. It is made by Evershed & Vignols, London.

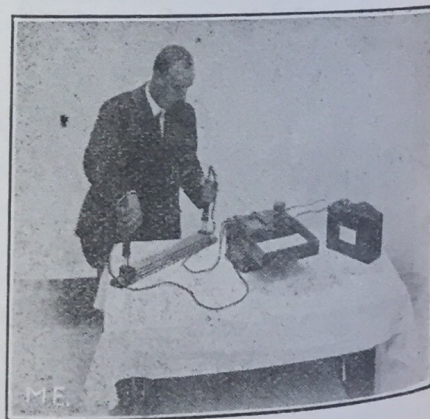

Ducter in Operation.


Each of the handles contains a voltmeter and an ammeter contact spike

The Ducter combines in one instrument the functions of the ammeter, the potential galvanometer and the slide rule. It gives a direct reading of the value of the resistance under test, without any more calculation than is involved in multiplying by tens. There is no preparation to be made beyond connecting the Ducter to the cell which provides the testing current, and pressing the contact spikes which complete the circuit against the terminals of the resistance which is to be tested. The movement is nearly aperiodic, and the index

comes to rest in about three seconds from the moment when the contact spikes are applied to the test resistance. Hence the reading can be noted within four or five seconds, and a complete test will not usually occupy more than one minute from start to finish.

AGEING WINE BY ELECTRICITY.

The accompanying diagram shows an apparatus for ageing wine, spirits, etc., by means of high frequency oscillations. A, is an ebonite tank full of petrol (gasoline), immersed in the wine to be treated. It has a tight cover of glass into which are sealed the ebonite tubes (G) open at the top. In the tank are a pair of spark balls (L)

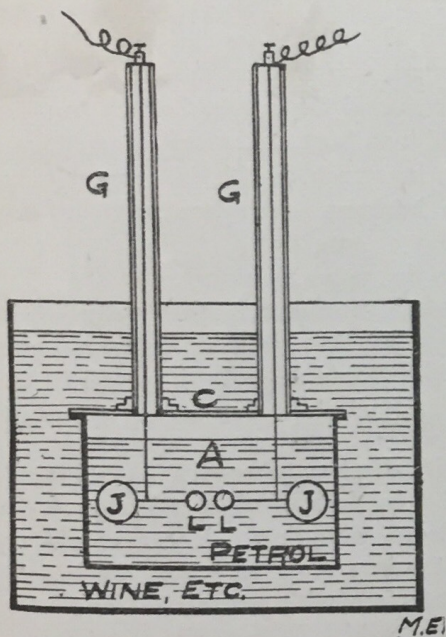


and a pair of larger aluminum balls (J) which serve as oscillators. The apparatus is connected to a spark coil by means of the wires extending up through the tubes. The tubes also serve to allow any gases that form in the tank (A) to escape to the atmosphere.

VIBRATORY RECTIFIER FOR ALTERNATING CURRENT.


The accompanying illustrations show two views of a new rectifier, of the vibratory type, brought out by the Adnil Electric Company, Ltd., of London. In the first picture the rectifier is shown simultaneously charging an eight volt and a four volt accumulator from a 220 volt alternating current supply. The other one is a better view of the rectifier alone,

The rectifier consists, essentially, of a transformer with vibrating contacts. A stray field in the transformer operates

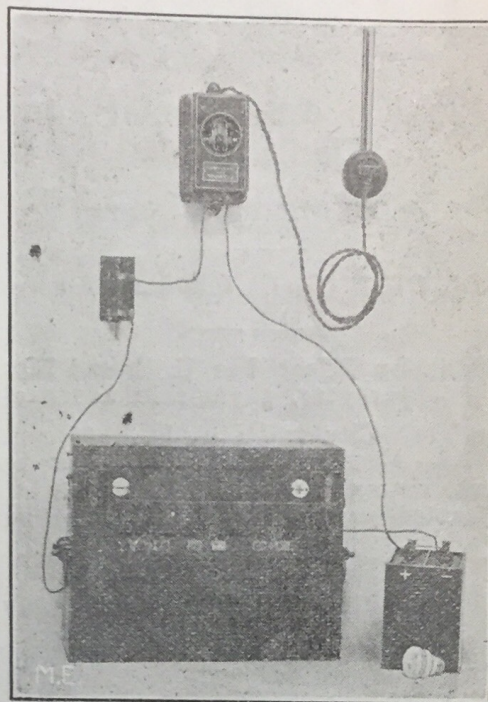

General View of Apparatus.

the armature and contact system of the rectifier at the zero points of the alternating current wave, producing a recti-

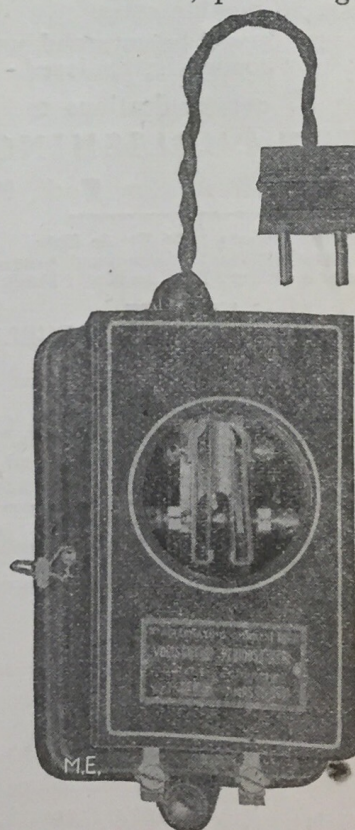

Near View of Rectifier.

fied current. Since the contacts are broken at the zero points of the wave the machine operates sparklessly.

MODERN ELECTRICS

A Magazine devoted entirely to the
Electrical Arts.

H. GERNSBACK, Editor

O. J. RIDENOUR, Business Manager

Subscription Price: For U. S. and Mexico
\$1.00 per year, payable in advance.

New York City and Canada, \$1.25.

Foreign Countries, \$1.50 in Gold.

Checks on out of town Banks cannot be accepted unless the usual exchange is added.

SINGLE COPY, 10 CENTS

Forms close the 20th of the month preceding date of publication. Advertising rates on application.

The Editor will be pleased to receive original contributions of timely interest pertaining to the electrical and the affiliated arts. Articles with good drawings and clear photographs especially desired. If accepted, such articles will be paid for on publication, at regular rates.

No manuscripts will be returned unless return postage is enclosed.

Address all communications to:

MODERN PUBLISHING CO.

233 Fulton Street, New York, N. Y.

Chicago Office: 1106 Trade Bldg.
Paris Office: 12 Boulevard Arago
Brussels Office: 23 Rue Henri Maus

Copyright, 1912, by MODERN PUBLISHING COMPANY.

THE MODERN PUBLISHING CO.

H. GERNSBACK - President and Secretary
O. J. RIDENOUR - Vice President and Treasurer

Entered as second class matter March 31, 1908, at the New York Post Office, under the Act of Congress of March 3, 1879.

Vol. IV.

FEBRUARY

No. 11

EDITORIAL.

ELSEWHERE we print a copy of the new Alexander Wireless Bill.

Before we go any further we might as well tell all those interested in wireless that it is not necessary to feel any anxiety over this

or any other wireless bill. We have noted in the past that every time we have printed any of the various wireless bills there was almost a panic among the amateurs and other wireless interests.

Readers of this magazine well know the policy that *Modern Electrics* has always pursued, and as far as the interests of the wireless amateurs is concerned, it is not necessary to point out that the proprietors of this magazine have always stood up for the wireless amateurs.

This holds true of the Alexander bill, and as soon as the bill was made public, *Modern Electrics* at once took steps to safeguard these interests. A great number of protesting letters were written at once to Washington and the results accomplished so far are distinctly encouraging, in so far as the amateurs and other wireless interests are concerned. As far as the Alexander bill itself is concerned, it is no worse than previous ones; in fact if it should be passed, which we doubt, it would not hurt the wireless amateurs in the least, inasmuch as this bill covers only interstate business. Wireless amateurs living in the same state could communicate with each other the same as before.

The Government realizes fully the importance of the American amateurs to-day, and if any bill should be passed, it will be one that regulates wireless, but in no way suppresses it.

This, *Modern Electrics* has always advocated. In fact *Modern Electrics* is heartily in accord with any bill that should regulate wireless in such a way that the amateurs do not interfere with commercial or Government business, which is only right and fair.

As stated elsewhere in this issue, Government officials have already been busy in New York of late, to find out what equipment the various amateurs use, what their wave lengths are, what power they use, etc.

This is distinctly encouraging, because it shows that the Government is getting accurate information before trying to pass any bill.

There should be a bill passed restraining the amateur from using too much power, say, anything above 1 K.W.

The wave length of the amateur wireless station should also be regulated in order that only wave lengths from a few metres up to 200 could be used. Wave lengths of from 200 to 1,000 metres, the amateurs should not be allowed to use, but they could use any wave length above 1,000. If this is done, all interference with Government, as well as commercial station, will be done away with and

the wireless situation will then be the same as to-day. The amateurs will have the same liberty and perhaps greater liberty than to-day, and complaints against them from Government or Commercial stations will cease automatically.

Modern Electrics has prepared a very comprehensive article which will be published in the next issue showing just what equipment the amateur can use to keep from interfering with Government and Commercial stations, and there is no doubt

that this article will, in a great measure, prevent a lot of future mischief.

It is significant that none of the other periodicals, who always shout that they have the interests of the amateur at heart, appeared to know anything about the Alexander bill, nor did any of them take any steps to serve their readers.

Modern Electrics has been the first in the wireless field and will continue to serve the wireless amateur and the independent wireless interests in the future, as in the past.

Alexander Wireless Bill

In the House of Representatives.

December 11, 1911.

Mr. Alexander introduced the following bill; which was referred to the Committee on the Merchant Marine and Fisheries and ordered to be printed:

A BILL (H. R. 15357)

To regulate radio communication.

Be it enacted by the Senate and House of Representatives of the United States of America in Congress assembled, That a person, company, or corporation within the jurisdiction of the United States shall not use or operate any apparatus for radio communication as a means of commercial intercourse among the several States, or with foreign nations, or upon any vessel of the United States engaged in interstate or foreign commerce, or for the receipt or transmission of radio messages or signals the effect of which extends beyond the exclusive jurisdiction of the State or Territory in which the same are made, or where interference would be caused thereby with the receipt of messages or signals from beyond the jurisdiction of the said State or Territory, except under and in accordance with a license in that behalf granted by the Secretary of Commerce and Labor upon application therefor; but nothing in this Act shall be construed to apply to the transmission and exchange of radio messages or signals between points situated in the same State, provided the effect thereof shall not extend beyond the jurisdiction of the said State or interfere with the reception of messages or signals from beyond said jurisdiction; and a license shall not be required for the transmission or exchange of messages or signals by or on behalf of the

Government of the United States. Any person, company, or corporation that shall use or operate any apparatus for radio communication in violation of this section, or knowingly aid or abet another person, company, or corporation in so doing, shall be deemed guilty of a misdemeanor, and on conviction thereof shall be punished by a fine not exceeding five hundred dollars, and the apparatus or device so unlawfully used and operated may be adjudged forfeited to the United States.

Sec. 2. That every such license shall be in such form as the Secretary of Commerce and Labor shall determine and shall contain the restrictions pursuant to this Act on and subject to which the license is granted; shall specify the ownership and location of the station in which said apparatus shall be used and other particulars for its identification; and shall not be construed to authorize the use of any apparatus for radio communication in any other station than the one specified. Every such license shall be subject to such regulations as may be established from time to time by authority of this Act or subsequent Acts and treaties of the United States. Every such license shall provide that the President of the United States, in time of war or public peril, may cause the closing of any station for radio communication and the removal therefrom of all radio apparatus, or may authorize the use and control of any such station or apparatus by any department of the Government upon just compensation to the owner.

Sec. 3. That every such apparatus shall at all times, while in use and operation as aforesaid, be in charge or under the supervision of a person or persons licensed for that purpose by the Secretary of Commerce and Labor. Every person so licensed who, in the operation of any such wireless apparatus, shall fail to observe and obey regulations made pursuant

to this Act or subsequent Acts or treaties of the United States, or any one of them, shall, in addition to the punishments and penalties herein prescribed, suffer the suspension of his said license, and the same shall not be renewed for a period of one year from and after the date of his conviction of any such failure. It shall be unlawful to employ any unlicensed person or for any unlicensed person to serve in charge of the use and operation of such apparatus, and any person violating this provision shall be guilty of a misdemeanor and on conviction thereof shall be punished by a fine of not more than one hundred dollars or imprisonment for not more than two months, or both, in the discretion of the court, for each and every such offense.

Sec. 4. That for the purpose of preventing or minimizing interference with messages or signals relating to vessels in distress or of naval and military stations by private or commercial stations, the President of the United States shall establish from time to time regulations, by designation of wave lengths or otherwise, to govern said private or commercial stations, which may be granted license by the Secretary of commerce and Labor in accordance therewith, and such regulations shall have the force and effect of law and be enforced by the Secretary of Commerce and Labor through collectors of customs and other officers of the Government as other regulations herein provided for.

Sec. 5. That every license granted under the provisions of this Act for the operation or use of apparatus for radio communication shall prescribe that the operator thereof shall not knowingly interfere, as in this Act provided, with messages relating to vessels in distress or with any naval or military station. Such interference shall be deemed a misdemeanor, and upon conviction thereof the owner or operator, or both, shall be punishable by a fine of not to exceed five hundred dollars or imprisonment for not to exceed one year, or both.

Sec. 6. That the Secretary of Commerce and Labor shall have power to make regulations prescribing the form and manner in which applications for licenses under this Act shall be made and respecting the granting of such license; and regulations, by wave lengths or otherwise, suitable to secure the due execution of the provisions of this Act, and from time to time to add to, modify, amend, or revoke such regulations, as in his judgment may seem expedient; and such regulations, when so adopted, shall have the force and effect of law.

Sec. 7. That licenses may be granted under this Act for the use and operation of apparatus for radio communication at fixed stations upon the mainland, islands, or the navigable waters of the United States, to be known as licenses of the first class and upon vessels of the United States engaged in interstate or foreign commerce, to be known as licenses of the second class.

Sec. 8. That the expression "radio communication" as used in this Act means any system of electrical communication by telegraphy or telephony without the aid of any wire connecting the points from and at which the messages, signals, or other communications are sent or received.

Sec. 9. That messages and signals relating to ships in distress shall have priority over all other messages and must be answered with similar priority, and, subject to such priority, messages by, to, or on behalf of the Army or Navy of the United States shall have priority over other messages. Any person failing to comply with the requirements of this section shall be deemed guilty of a misdemeanor, and upon conviction thereof shall be punishable by a fine of not more than five hundred dollars and by the revocation of his license.

Sec. 10. That a person, company, or corporation within the jurisdiction of the United States shall not knowingly utter or transmit, or cause to be uttered or transmitted, any false or fraudulent distress signal or call, or false or fraudulent signal, call, or message of any kind. The penalty for so uttering or transmitting a false or fraudulent distress signal or call shall be a fine of not more than two thousand five hundred dollars, or imprisonment for not more than five years, or both, in the discretion of the court, for each and every such offense, and the penalty for so uttering or transmitting, or causing to be uttered or transmitted, any other false or fraudulent signal, call, or message shall be a fine of not more than one thousand dollars, or imprisonment for not more than two years, or both, in the discretion of the court, for each and every such offense.

Sec. 11. That a person, company, or corporation shall not use or operate any apparatus for radio communication on a foreign ship in territorial waters of the United States otherwise than in accordance with the regulations made for that purpose by the Secretary of Commerce and Labor, and for any breach of any such regulations the offender shall be liable to a penalty of not to exceed fifty dollars for each offense and to the forfeiture of any apparatus for radio communication used or operated on such ship. Save as aforesaid, nothing in this Act shall apply to apparatus for radio communication on any foreign ship.

Sec. 12. That the trial of any offense under this Act shall be in the district in which it was committed, or if the offense was committed upon the high seas or elsewhere out of the jurisdiction of any particular State or district shall be in the district where the offender is found or into which he is first brought.

Sec. 13. That this Act shall take effect and be in force on and after the first day of January, nineteen hundred and thirteen: *Provided, however,* That the fourth, fifth, ninth, tenth, and twelfth sections of this Act shall take effect and be in force on and after four months after its passage.

Ralph 124C 41 +

(Continued.)

By H. Gernsback

DURING the next few days nothing of importance occurred. Ralph worked almost uninterruptedly in his laboratory in the conning tower. In the course of a week, since he had left the Earth, he had only dozed off for about two hours, no sleep being possible on board a space flyer.

He constructed several new pieces of apparatus, which he thought might come in handy during a possible encounter with Llysanorh'. He knew very well that Llysanorh' would not be as easily subdued or caught as Fernand. Quite the contrary. This tall Martian was an inventor himself and knew a few things about handling novel death-carrying apparatus. It would be useless trying the Radioperforer on him, as he probably would carry a Silonium armor, proof against all Radium emanations.

Ralph knew that Llysanorh' was a mighty foe, a ferocious one at that, and one who would fight till death rather than give up. Accordingly Ralph took his measures and made all the preparations necessary for the coming encounter.

His genius as usual had risen to the occasion and he had invented several things that he thought would give a few surprises even to Llysanorh'.

One of the first things he had done was to lead wires from the steering apparatus up to the conning tower. On the floor of the tower he arranged contacts in such a manner that he could press them together with his feet. The control was similar to the foot pedals of an organ. He then practised for some days and gradually became expert in steering the flyer solely by means of his feet. Thus his hands were quite free to manipulate all the apparatus which he would need in order to attack his enemy, or to defend himself. With his feet he would steer the machine in order to dodge projectiles, in case there were to be any.

As the days rolled by, however, Ralph became more and more alarmed. He now took observations almost hourly, his eyes glued to the indicator. With sinking heart he saw that he was not gaining on his enemy. The latter had his machine well in control and was covering almost 90,000 miles an hour now. At this rate Ralph would never catch up with

Llysanorh'. It was maddening. The days became a long, drawn-out agony. Ralph had done everything in his power to accelerate the speed of his flyer and it was useless to strain the machinery further, without inviting almost certain death. Within eight days Llysanorh' would land on Mars—his course plainly showed that he headed for this planet. At best Ralph would be ten hours behind—time enough for his enemy to accomplish his purpose. And he, Ralph 124C 41+ the greatest inventor the world had ever produced, was powerless to prevent his enemy from marrying his sweetheart right under his nose, as it were.

Ralph sat down and stared at the stars, his eyes wide open and devoid of lustre. He had been beaten and robbed as if he were a child. There he sat with clenched fists and drawn face, ready to cry of sheer madness and disappointment.

Suddenly he gave one bound, which brought him promptly into collision with the ceiling. He let forth one hysterical shriek and began to laugh till the tears rolled down his cheeks. For five minutes he continued to laugh; he acted more like a lunatic than a cold, matter-of-fact scientist.

Surely he had reason to be merry. His genius had risen to the occasion in the eleventh hour. His wonderful brain had overcome all impossibilities. Mind again would triumph over space and time. The battle was not lost, it had not even begun!

His plan was so simple that it made him laugh even hours afterwards. This was what his fertile brain had ferreted out:

He knew he could not overhaul Llysanorh'. He could not intercept him either. A wireless decoy message was futile. Llysanorh' would never be caught that way, that much was certain. There was nothing left but to prevent Llysanorh' from reaching Mars.

How could it be accomplished? By sending a message to the Martian authorities? A futile thought. Even if the distance could be bridged, which was doubtful, Llysanorh' would, of course, intercept the message with his recorder. He would promptly call his friend and invite him to board a space flyer and to rush to him at top speed. The marriage cere-

mony would then be performed out in space and Ralph would get the Hah, Hah!

No, Llysanorh' must not know that he is pursued and still he must be prevented from landing too early.

Ralph would move the heavens in the truest sense of the word. He would get a comet which threatened to collide with Mars. Llysanorh', a staunch patriot, would surely try to bring the comet from its course, to avoid its colliding with Mars. He could do so without danger to himself, simply by steering his flyer close to the head of the comet—within a few hundred kilometers. The gravitational action of his machine on the comet would deflect the course of the latter quite a little—even a few degrees would be sufficient to change the path of the comet.

But how about the comet? At first thought Ralph's plan seems ridiculous, but nevertheless it is simplicity itself. Ralph did not need to "catch" a comet—no, he would manufacture one for himself and one so unique as never rushed through the universe before.

He knew that comets had been reproduced artificially on a small scale, centuries ago*; however, no one had ever tried to make a real comet on a large scale. He also knew full well that the largest comets have a very small mass, and that the tail is composed mainly of gas and dust, which is so thin that the stars may be readily observed through the tail of nearly every comet.†

So it came about that Ralph was the first human being to create a heavenly body, of his own free will, surely a grandiose undertaking. As comets are composed mainly of hydrogen

*In 1876 Reitlinger & Urbanitzky before the Vienna Academy of Sciences published a report on their experiments on artificial comets. A tube containing hydrocarbon has been pumped out till the pressure has fallen to 0.1 millimeter. If connected to an induction coil, a blue sphere will be formed at the positive electrode after a short time, which "hangs" suspended freely. Connected to the sphere is a tail, fig. 1. One is struck immediately with the close resemblance between this artificial comet and that of Henry's Comet of




Fig. 1.



Fig. 2.

1873, fig. 2. If a conductor (a brass ball) as seen in fig. 1 is brought near the tube, the tail flees from the conductor as far as the tube allows. This again proves that the artificial as well as the real comets are subject to the same natural laws. As is known, the tails of all comets are repulsed strongly by the sun, which latter is nothing but a conductor.

gas and dust, the manufacturing of Ralph's artificial comet was extraordinarily simple.

By means of scraps of zinc and iron filings, over which sulphuric acid was poured, Ralph produced a large quantity of hydrogen. This he filled in tanks and when he had enough he connected the tanks with the large metal stop cock in the wall of the space flyer. As soon as the stop cock was opened the hydrogen rushed out in the open with a roar.

Immediately Ralph connected his high frequency apparatus with the outside aerials of the space flyer and lo—a wonderful phenomenon took place.

The hydrogen particles which heretofore had been invisible, began to glow with a wonderful light, enveloping the entire flyer. For thousands of miles behind the machine stretched a true comet tail, the flyer forming its head or nucleus. The tail, in true comet fashion, was turned away from the sun, and although Ralph could not see the end of the tail, he knew it could be seen for hundreds of thousands of miles, as if it had been a natural comet.

Ralph, however, was not yet fully satisfied, so he set about to improve the comet. He manufactured several other gases in large quantities, which he ejected into the outer space, and which greatly enhanced the brilliancy and size of the comet's head as well as of the tail.

However the head, he imagined, was not "solid" enough as yet, so he improved upon it immediately.

It is well known that comets are not only composed of gases, but contain a large amount of dust. These dust particles in a comet act very much like the dust particles upon which a sun ray falls. Everyone is familiar with the comet-like appearance of a sun ray passing through dust, and if we eliminate the atmosphere and place the same dust in the outer space, a small comet will be the result. The small particles will be highly electrified by the sun and begin to glow. Each particle repels the other and thus even a handful of light dust will form a respectable comet in the outer space.

†According to Bredikhine, the long straight tails, as seen in the comet of 1861, are composed of hydrogen; the long curved tails, like the principal tail of Donati's Comet, consist largely of hydrocarbon vapors; while the somnolent, rare, short tails of violent curvature are made up of mixed iron, sodium and other metallic vapors. This classification has received support from spectroscopic evidence. In 1882, Fitzgerald first propounded the theory that the tail was due to the pressure of light upon the gaseous matter composing it. In 1900 Arrhenius revived the theory, but modified it to the extent of supposing the tail to consist, not of gaseous matter, but of fine particles produced by condensation from the emanations of the comet.—New International Encyclopædia.

For this reason Ralph made a large quantity of dust by grinding paper and wood and other materials on a fine sandpaper wheel.

After he had made a few pails full, he blew the dust out into the outer space, and if his comet had been a magnificent sight before, it was really wonderful to look upon it now from a great distance.

The heaviest particles did not stray far away from the flyer, on account of gravitational action, but quite enveloped it. The machine was now a true planet, while the fine dust particles had become little satellites, revolving around their central body, the flyer.

The lighter dust particles found their way into the tail, as the powerful pressure of the sun's light overcame the attraction which the flyer brought upon them.

Ralph tried turning off the high frequency current and was surprised that the comet was not extinguished and that its brilliancy was not in the least influenced. The gas and dust particles had no way to dissipate their initial electrical charge, being in an absolute vacuum; and to Ralph's astonishment his artificial comet had become a real one in the truest sense of the word.

Inasmuch as the dust was quite dense immediately around the flyer, his outlook was not as clear as it had been before. He could just barely see the stars, which seemed enveloped in a misty haze. This, however, pleased him greatly, as he knew that his comet must look very natural from a great distance.

In this he had not been mistaken. As he afterwards ascertained, his comet had been "discovered" simultaneously on the Earth, on Venus, and on Mars the very day he had made it. It had been charted and named, and on account of its great brilliancy and its wonderful long tail, it had been termed at that time "The Great Comet of 2660"!!

That Llysanorh' would see the comet Ralph never doubted for a second. He headed the comet exactly toward the point where it would collide with Mars at the end of six days. He also knew that the Martians would be on the lookout, and inasmuch as Ralph's careful search did not reveal another space flyer anywhere near him, he knew that the Martian officials would surely locate Llysanorh'.

In this he was not mistaken. His chronometer pointed to 5 P. M. when he first recorded weak signals coming from Mars. Several messages were exchanged thereupon between the Martians and Llysanorh'. Llysanorh' gave his number and position in the heavens and he in turn received instructions to approach as near to the "comet's" head as feasible in order to change its course. He was

also instructed to bombard the comet's nucleus with time-set explosives, if he could not deviate the comet from its course. Llysanorh' answered that he would follow instructions as his equipment well allowed him to do so.

During the next few days Ralph was wild with joy to note that the distance between him and Llysanorh' diminished with great rapidity. His trick had worked beautifully—Llysanorh' not only had discontinued his course toward Mars, but he actually rushed at top speed towards Ralph, whom he took for a comet.

Ralph chuckled all day long, it was a picnic for him and he enjoyed the situation hugely. Was not his sweetheart, his Alice, on board, drawing nearer and nearer to him every minute! No wonder he felt elated and happy.

At last the day came when Llysanorh' came into range. Ralph had not changed the direction of his machine and Llysanorh' soundly believed that he had to do with a genuine comet. Llysanorh' approached the "comet" up to about 150 kilometers and then receded. He then took observations, but somehow or other the "comet," instead of being deflected, commenced to pursue Llysanorh'. This was an unheard-of occurrence and Llysanorh', beginning to think that the "comet" was to collide with him, began to fire explosive torpedoes against the nucleus of the "comet." As the distance between him and the latter was only about 100 kilometers now, he watched the torpedo in its flight. His aim had been accurate. Through his telescope he could see the torpedo rushing towards the "comet's" head but what was that? the "comet" actually dodged, "ducked," more accurately, and the torpedo shot far above the nucleus! This certainly was preposterous—why did the comet behave thus? A cold shiver ran over Llysanorh'.

He fired again, an excellent shot for accuracy. The torpedo would surely strike now, —no,—horrors!—the "comet" this time "side-stepped," as it were, and the torpedo sped on through space, missing its target by a wide margin.

If there ever was a bewildered Martian it surely was Llysanorh'. The cold sweat broke out all over him. This certainly was an unheard of thing, an uncanny phenomenon. It surely was not gravitational action that made the "comet" act in this strange manner; however, there was no time to be lost in idle speculations,—he must continue to fire. He fired one torpedo after another, but the comet dodged them all.

This became too much for Llysanorh' and he gave up firing torpedoes. He next tried to destroy the infernal "comet" by electricity.

Soon his aerals were white hot with the energy he threw upon them. He then turned his flyer into such a position as to direct the outflowing energy towards the "comet's" head. All the results he obtained from this, however, were in the increased luminosity of the "comet." The latter still continued merrily to pursue Llysantorh! In fact, it had stolen up suddenly towards Llysantorh', who had not speeded up his machine to the utmost, with the result that the distance between the two bodies had been reduced to about 50 kilometres. Llysantorh' noticed with horror that the head of the "comet" now seemed to fill up almost one-quarter of the "sky." He first had imagined that the "comet's" head was solid, but to his amazement he only saw a small black speck in the center of the nucleus, which he could not understand. It was against all theories and facts known of comets.

No sooner than Ralph and his "comet" had come within fifty kilometres of Llysantorh', he felt that the time had come to open the battle in earnest. So far he had acted on the defensive only; now the real war would begin.

He had, of course, one great advantage over his enemy. The latter was totally unprepared, as he still thought that he had to deal with a comet. This facilitated matters greatly for Ralph.

He carefully insulated himself by sitting on a tall glass tripod. He then attached to his ears the telephone receivers that were connected with the induction balance,* which he had attached to one of the glass port-holes.

He then started to turn the glass wheel of the ultra-generator, which latter was connected with the outside aerals.

A terrible screaming sound was emitted by the generator and the whole flyer shook. Ralph continued to turn the wheel quickly. The generator emitted sounds shriller and shriller, higher and higher, and suddenly the frequency had become so high that no sound could be heard any longer. The vibrations had reached 35,000 and above this the ear is incapable of hearing further sounds, although the sound is still there, inaudible to the human ear.

Ralph turned the wheel a few more notches and everything became pitch-dark over an area of over sixty kilometres in diameter.

As in his Switzerland exploit, two months before, Ralph's aerial on the space flyer due to the powerful action of his ultra-generator, attracted the ether so fast that it could not be

replenished quickly enough. It acted much like an immense vacuum pump on the atmosphere.

The consequence was that there was an utter darkness over a large area. As his as well as Llysantorh's flyer was in the affected region, both machines were, of course, in the dark, and invisible to each other.

Ralph, however, steered his machine on its former course and speeded it up to its utmost.

Llysantorh', as soon as this never heard of darkness had set in, had brought his machine to a dead stop. He was almost frantic with terror and stood like one paralyzed, unable to think or to act.

Within a few minutes Ralph's induction balance caused his telephones to emit higher and higher notes, and from this he could tell, despite the pitch-black darkness, just how near he was to the other flyer.

When he was certain that he had approached Llysantorh's machine, he suddenly shut off his ultra-generator. Quick as lightning he had grasped his radioperforer, and although the light which had returned so suddenly blinded him for a few seconds, he had seen Llysantorh's terrified face, just a few meters distant, his forehead pressed tight against the glass plate of the porthole. Ralph took quick aim and pressed the button.

There was a silent flash and Llysantorh' seemed to topple over. Simultaneously the glass of the porthole turned green.

Like a flash Ralph jumped up and peered anxiously from one porthole to the other, expecting to catch sight of his long lost sweetheart.

There was nobody to be seen.

He rushed to the wireless and signaled frantically for several minutes. Breathlessly he clasped the receivers to his ears.

There was no answer, no sound. Nothing.

With sinking heart, terror all over him, he now rushed to the connecting tube like a madman. In his excitement it took him twenty minutes or longer to make the connection between the two machines and to make the tube air-tight. Before he crawled into the connecting tube he ran for his radioperforer as a precaution for safety.

Finally he got into Llysantorh's machine. The sight that presented itself to him, twenty feet away, made him utter an agonized cry. He threw the radioperforer far away from him and rushed to Llysantorh'.

Llysantorh' was lying across Alice, his sharp dagger sunk into the upper part of her arm. He was stone dead. Ralph picked the rigid body up and threw it aside like a stick.

There lay Alice in a terrible pool of her own blood, her eyes closed—dead. . . . Her body was warm as yet, but her heart must have


* The induction balance is an instrument which, connected with a telephone, causes the latter to emit a singing sound, when a piece of metal is brought near the balance. It is incredibly sensitive and has been used to locate buried treasures, etc. Invented in 1880 by Professor Hughes.

Wireless Transmission of Secret Messages

A Norwegian inventor, Mr. Horland, is working with an apparatus for sending secret messages by wireless, and in case of war or in usual military operations, as well as in other cases, this may prove to be valuable. We will describe the main points of the device, omitting many of the details. The object is to send the letters of the alphabet and to have them printed in usual or in secret type at the other end. The method for the usual type will be considered first.



- FIG. 1 -

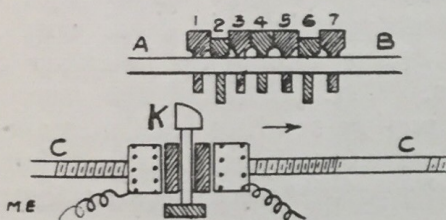

- FIG. 2 -

Each letter is supposed to be made up of a certain number of equal spaces each of which has the width of a dot (Fig. 1). Thus the letter F, having two dots and one dash, is made up of the parts numbered from 1 to 7. Each of these parts is represented by one movable type in Fig. 2, so as to set up the letters by raising the type. The type have projections below, and are placed in a frame. Below the frame a magnet device K runs along upon a revolving screw shaft and it has a striker which can push up the type when the magnet receives current from the other end of the line. The transmitter and receiver both run on synchronous motors, so that should the sending operator wish to set up the letter F, he depresses a key at the proper moments while the magnet is passing from A to B, so that projections 1, 3, 4, 5, 7 are struck while 2 and 6 are passed by. For the next letter, the device K is brought back and then makes a new course, and so on.

In Fig. 3 will be seen the manner

in which the type acts as contact pieces so as to complete a circuit and cause the corresponding letter to be printed by a wheel upon a paper strip. On a frame C are placed sets of contacts in different lines, each line representing one letter, with the shortest letters at the top. After the frame A B has the letter (F, for instance) set up on it, it is pushed slowly to pass by the pins on the cross bar. When the pins come to a certain row of contacts they will bridge over all the gaps and cause the circuit to be completed for this row which represents the letter F, and a current then passes across so as to work the printing wheel, thus striking the letter F on the paper tape.

This is seen in Fig. 4, but instead of using a frame, the contacts are carried around a cylinder, while the type frame i. h., is fixed below. On the shaft is a printing wheel N with the letters of the alphabet and under it runs a paper strip. An electromagnet E presses the paper against the wheel at any moment so as to print a letter. The magnet is put in the circuit of the wheel contacts by brushes at a and b. When the type frame completes the circuit of the contacts representing the letter F, this same letter upon the printing wheel is

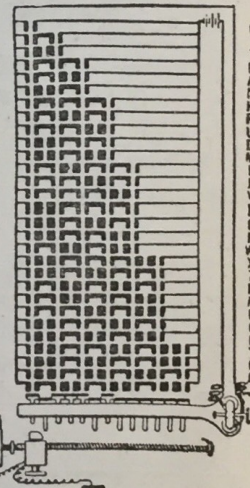


Fig. 3

just over the magnet at this time, and when the current passes in the magnet the letter F is printed on the paper. In the next period, the type in i. h. and the device K are restored to zero so as to commence setting up a fresh letter. The cylinder makes another rotation, and the next letter is printed on the strip, and so on.

The method of sending is shown in Fig. 5. On a fixed disc C is carried a set of contacts, with an arm moving around them and driven by an electric motor. The arm passes around from 1 to 7 at the same time that the type-

setting electro-magnet device at the receiving end is running under the type from left to right, since the motors at each end are operated in synchronism with each other. On the disc C, should the contacts 1, 3, 4, 5, 7 carry current, electrical impulses will pass over the line at the proper moments to raise the corresponding type as we have above seen. In practice, the operator has a keyboard so that pressing one button, F, automatically puts current into the proper contacts, as seen at A, B, C, D, etc. At the same time, any one of the buttons completes the circuit in the relay g, h so that the current passes on the line. These impulses can be sent by wire-

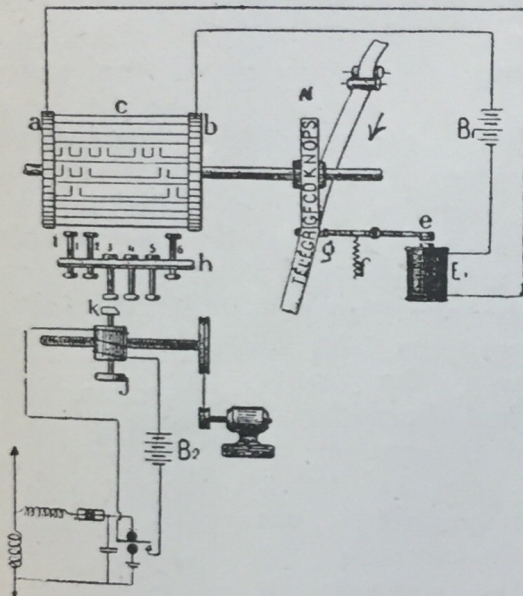


Fig. 4. Printing Apparatus.

less, as seen below, and they are received in the wireless apparatus of Fig. 4.


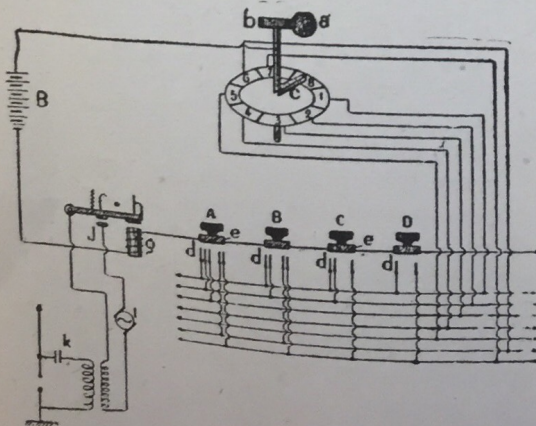


Fig. 5. Sending Apparatus.

To send secret messages, which are printed in cipher letters, all that is

needed is to shift the printing wheel around the shaft, and set it at another

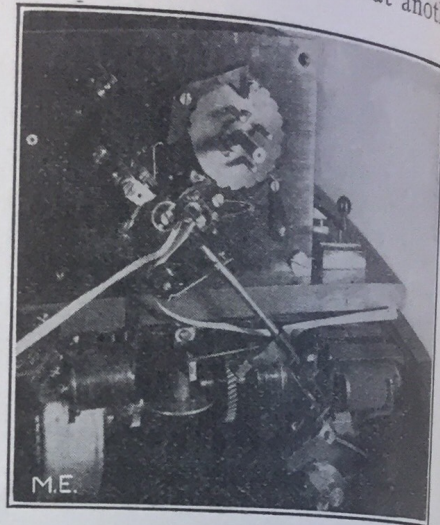

Printing Apparatus, Horland System.

point, so that instead of printing F we print J, for instance, and so on. The message can then be read only by the operator. We give an example of a message sent first, in usual words, (in Norwegian) and again in cipher characters. Mr. Horland has succeeded very well in sending such messages by wireless over short distances, but the question of distance does not enter in

4. UY22.+E04U U430YN
 =3U2D 3EN .9E4504YN
 .4U 4Y .U 52Y69.3
 1Y2U2U39.4. 69+U2.9
 2U SUE47U+4 .RY47U4
 U4+48Y2554Y 54.
 52Y69.3UU2U39.4Y.4 3
 72.2.03 .4.
 3U2+34. UTS 79+9.34YRU42N

DEN TRAADLØSE SER.
 PISA 14 NOVEMBER.
 DET ER LYKKE MARCONI
 FRA STATIONEN COLTANO
 AT UTVEKSE DIREKTE
 TELEGRAMMER MED
 MARCONI STATIONERNE
 I KANADA OG I DEN
 ITALIENSKE KOLONIERETRA.

Facsimile of Secret Wireless Message.

here, as such messages can be sent to any distance which a wireless post can cover, so that very long distances can be reached.


GOVERNMENT LOOKS INTO AMATEUR STATIONS.

Recently Government officials have visited quite a number of amateur wireless stations in the vicinity of New York City for the purpose of finding out the wave lengths most in use among amateurs. As a result of their investigations it is said that a regulation will shortly be made by the Government restricting amateur and private stations to wave lengths below 400 metres or above 1,200 metres. In other words, they will not be allowed to use wave lengths between and including these values.

Simple Experiments in Chemistry—Water

By Philip Edelman.

WATER is a compound of Hydrogen and Oxygen in which there are two parts of Hydrogen to one of Oxygen. This is represented by the formula H_2O . It is estimated that water covers about three-fourths of the earth's surface. In addition to the liquid form, water exists in a vapor and a solid (ice) form. Water is contained

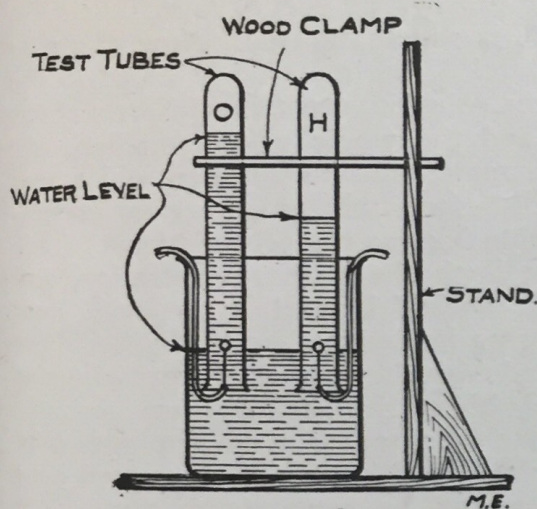

-FIG. 1-

in all animal and plant matter, in the soil, and porous rocks. Foods are largely water and the human body itself is almost seventy per cent. water.

Electrolysis of Water.—Water can be easily decomposed into its two components by the use of electricity. This is illustrated in Fig. 1. The apparatus consists of a container, two test tubes, and two electrodes. A little sulphuric acid is added to the water to make it conduct better. The test tubes should be filled with water and inverted over the electrodes as shown. A battery, or other source of electricity is then connected to the electrodes and bubbles of gas will at once form. The bubbles will rise and displace the water in the test tubes. One tube will be filled with gas just twice as fast as the other. The tube with the greater volume of gas contains Hydrogen and the other contains Oxygen. The tubes can be taken off and tested for the two gases. The polarity of a source of electricity can also be determined in this way.

Water for use in battery solutions

and the like should be as pure as possible. This is particularly so with storage batteries. Water is seldom found pure, so that it is necessary to distill it for the purpose mentioned. This consists of boiling the water to form steam, which is pure water and then condensing the steam. See Fig. 2.


Since water is such an important compound, it is a large problem to get it in a pure form. Various mechanical, electrical, and chemical devices and processes have been devised for the purification of water, none of which is as efficient as distillation; but on account of its expense, distillation is seldom used except for drinking water and other purposes requiring small quantities at a time.

Perhaps the most interesting property of water is its power to dissolve various substances. The degree of solubility varies greatly with the substance used. Take a test tube half full of water and small quantities of the following substances, and try each for its solubility:

Alcohol.
Glycerine.
Kerosene.
Common salt.

Also any others which are at hand.

Of those named, all, except the kerosene, will be found to be soluble in water. Generally, a solid will be more soluble in hot, than in cold water. There are exceptions, however. Some lime compounds, (Calcium Hydroxide,

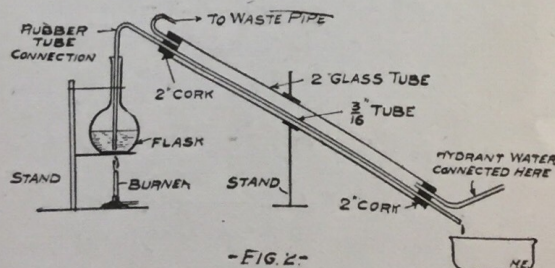

-FIG. 2-

or Bicarbonate of Lime) are less soluble in hot water than in cold. Ordinary salt will be found to dissolve only slightly better in hot than in cold water. Copper Sulphate and Potassium

Nitrate, on the other hand, are much more soluble in hot water. Thus, boiling water will dissolve nearly eight times as much Potassium Nitrate as will water at an ordinary temperature.

There is a limit to the quantity of a substance that can be dissolved in a given quantity of water. Although there may be some of the material left which has not dissolved, when this point is reached it will remain undissolved. This point is called the point of saturation and depends upon the temperature, as well as the purity of the material and the water.

When a solution is saturated it contains the greatest amount of the substance which is possible under the given conditions. Thus, if a solution of salt or Potassium Nitrate is prepared in a test tube with boiling water and then cooled, the solution which at first was clear, is changed and crystals of the material form. Since the material is more soluble at the higher temperature, the solution is saturated with less material at the lower temperature and the excess becomes undissolved.

When some substances are dissolved in water a great change in temperature takes place. Thus, when a little sulphuric acid is added to a test tube half filled with water the water becomes warm. *Never pour sulphuric acid in a tube first and then water over the acid.* If this is carried too far enough heat will be generated to crack the tube. Caustic soda acts in much the same way when added to water. *Care should be taken, when using acid or caustic soda not to get them on hands or clothing.* Other materials cause a fall in the temperature upon dissolving. Potassium Nitrate is the best example of this.

In chemical operations it is often desirable to separate the dissolved substance from the solution by precipitation. If a little solution of camphor in alcohol is put in a test tube and water is added, the camphor is precipitated because it is insoluble in water. The camphor in this case is the precipitate and after a little time it will fall to the bottom of the tube.

Make a clear salt solution by dissolving a little salt in water. In like manner make a clear solution of silver nitrate, using distilled water. Now if

the salt solution is added to the silver nitrate solution the clear solution is at once changed and a white precipitate forms. The silver chloride which is formed is insoluble. The sodium nitrate which is also formed, remains dissolved because all sodium compounds are soluble.


Fill a test tube half full of sodium sulphate or sodium thiosulphate crystals and heat in a hot water bath. (See Fig. 3.) When the crystals have all dissolved in their own water of crystallization the solution will be clear. The solution can be left to cool and no crystals should form. The solution is supersaturated. Now, if a tiny crystal of the material is added to the clear solution, crystals will form about it and the whole will crystallize. At the same time the solution which was cool before, will now give up considerable heat as the crystals form. This last is the heat of crystallization, and this method is used in preparing heat storing hot water bags. The bags are filled with the crystals instead of water and boiled in the ordinary manner. Thus prepared they may be put away for an emergency and the stored heat recovered by causing the crystals to form.

In the foregoing experiment "Water of crystallization," was mentioned. Many crystals contain this water as a part of the compound. Crystal Sodium Carbonate is made up of nearly two-thirds water. When exposed to the air, it soon loses its crystal water and changes to the anhydrous or dry form. Sodium sulphate acts in the same way when exposed to the air. This peculiar property is known as Efflorescence.

Some crystals will only lose their water of crystallization when heated. If a few crystals of copper sulphate are put into a test tube and then heated, they lose the water of crystallization and change to a dull gray powder. They can be changed back into the crystal form by adding water. Cobalt Chloride when heated in this way turns blue. The solution in water may be used as an invisible ink. It should be diluted until it is a pale pink and used with an ordinary pen. To make the writing appear, the paper containing the invisible writing is heated in a flame (taking care not to burn the paper). The writing appears

in blue when the water is driven off by the heat. To change it back again to the invisible form it is only necessary to blow upon it, the moisture in the breath changing it back again.

Still other substances that are soluble in water, but are dry when kept in air tight containers, have the power to absorb water when exposed to the air. They absorb the moisture which is in the air and become moist, some absorbing enough water to completely dissolve. This property is called Deliquescence. Calcium chloride is the best example of this. Caustic Soda and Caustic Potash also have this property. This deliquescence is very important and is used in many ways. Chemists rely upon it to remove wa-

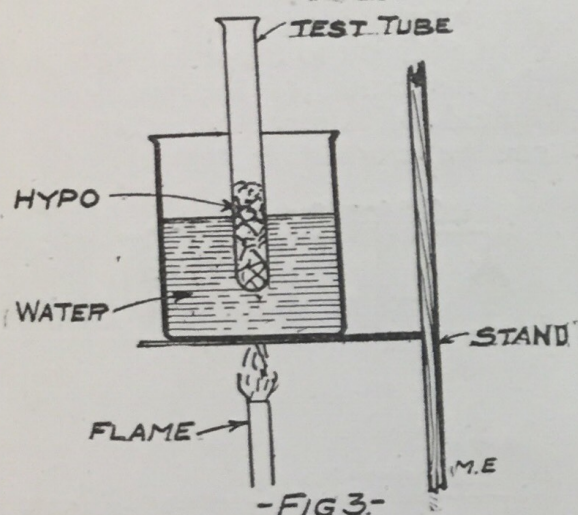

ter vapor from gas. Calcium Chloride is cheap and has been used to sprinkle streets. It absorbs water from the air and keeps the dust settled. It can also be used to advantage in making high grade ground electrodes for wireless stations and the like, as was pointed out by the writer some time ago.*

Solutions have important electrical properties. While water is itself a poor conductor of electricity, the addition of almost any crystal, acid, or soluble substance makes it a fairly good conductor. Sugar is an exception, because it is not decomposed. This property of solutions is utilized in some forms of water rheostats and in electrolytic interrupters. It may be remarked that acids are not the only materials which can be used for this purpose. Caustic Soda, Sal-Ammoniac, common salt and many other sub-

stances will be found to serve as well or better.

In the beginning, it was stated that water is contained in vegetable and plant matter. If a small sample of some vegetable matter is at hand this can readily be proved. Put the sample in a test tube and heat until all the water is driven off in the form of steam. (Sugar may be used for this purpose.) Gases as well as water will be driven off from most samples and the residue will finally be carbon. Such water is called integral water, that is, the water is incorporated in the compound.

Some crystals like salt do not contain water of crystallization, but have some water held in between the crystals. If a few crystals of rock salt are heated in a test tube this will become apparent.

THE QUENCHED SPARK.

(Continued from Page 777.)

of three round head screws the heads of which catch over the edge of the disc. The spacer blocks and lugs may then be soldered on without any fear of loosening the copper or silver facing on the other side. Remove all surplus solder from both sides of the discs, grind the copper or silver surfaces true and flat on a sheet of emery cloth glued on a flat board and the discs are finished.

Figure 4 shows how the gap is to be assembled, the gap at the top being shown in section.

This gap is heavy enough to handle anything up to $\frac{1}{2}$ k.w. without the use of a cooling fan and if a fan is used it will handle 1 k.w.

The number of individual gaps used may be varied from three to eight and should be governed by the size of the transformer and the distance to be covered. Binding posts are provided for the purpose of varying the number of gaps used.

Micanite, from which the insulating rings are made, may be purchased from almost any electrical supply house.

More women would want to do as they liked if they only knew what they liked.

Many a man goes wrong because he isn't satisfied to stay where he is.

*See Modern Electrics for August, 1911.

Advantages Gained Through the Use of Enameled Wire.


The accompanying cuts illustrate some of the advantages to be gained

60 per cent. more work is obtained with the same current.

Case III. Here the size of wire, current, and resistance are the same in each case. The length of the wire on each magnet is the same, but as the enameled wire occupies much less space the ampere turns and the work obtained is increased by 32 per cent., with the same current, despite the fact that the enameled wire wound coil is 20 per cent. smaller than the silk insulated coil.

The wire on the silk insulated coil is single-silk covered. The voltage is the same in each case.

In addition to the advantages shown, the insulation of the enameled wire wound coil is much better, and the coil can be worked at temperatures that

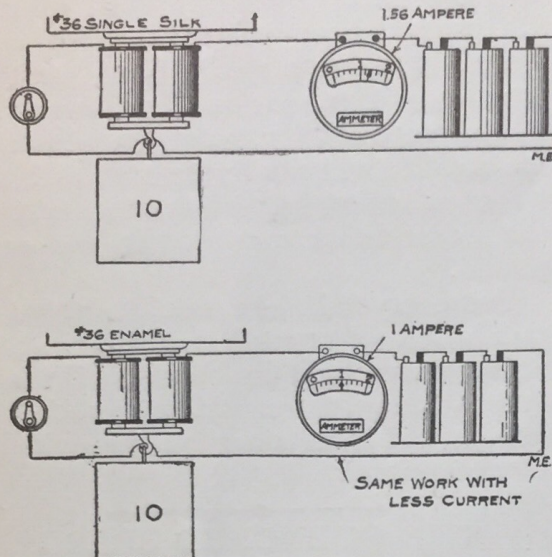


Case 1.

through the use of enameled wire for winding magnets.


Case I. Here we have the same sized wire, winding space, and work to be done. On account of the greater amount of enameled wire that can be wound in the same space, the resistance is increased and the ampere turns and work done, remain the same with less current.

Case II. Here the winding space, resistance, and current are the same in each case. By using one size larger

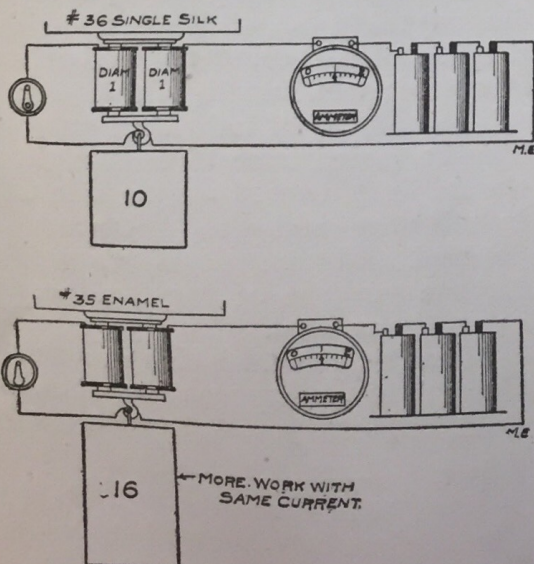

Case 2.

wire on the enameled wire wound coil,

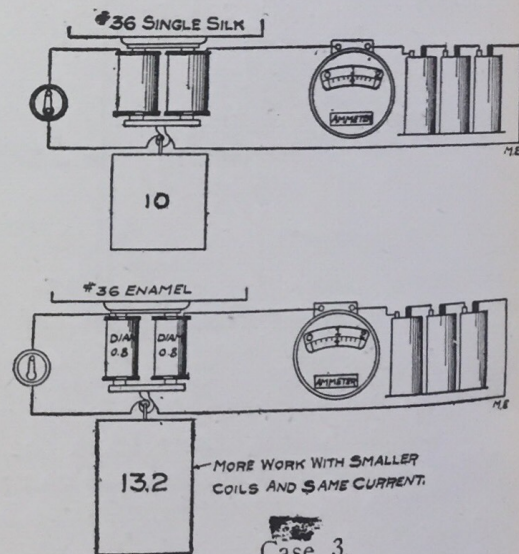

Case 3.


would quickly destroy silk or cotton insulation.

RALPH 124C 41 +
(Continued from Page 790.)

stopped beating for quite some time. Llysan-orh' had probably aimed at her heart, but had cut into the arm, directly into the large artery. As he fell across her she probably had fainted and the blood had quickly flowed out, and with it her young life had ebbed slowly away. . . .

Ralph covered her face with kisses while tears rolled down his cheeks. He then picked her up gently and transported her into his machine, where he tenderly placed her upon his bed.

(To be concluded.)

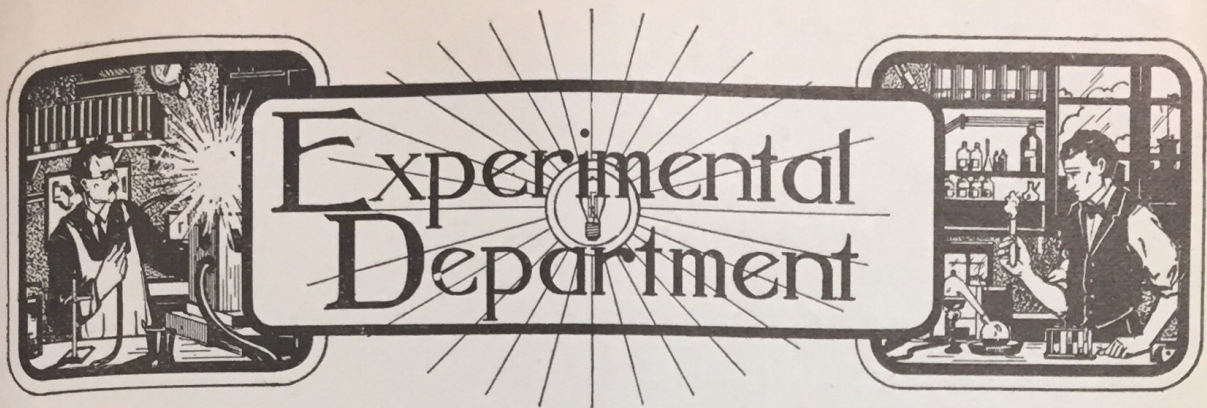

This department has been started with the idea to encourage the experimenter to bring out new ideas. Every reader is welcome to contribute to this department, and new ideas will be welcomed by the Editors. WHEN SENDING IN CONTRIBUTIONS IT IS NECESSARY THAT ONLY ONE SIDE OF THE SHEET IS USED. SKETCH MUST INVARIABLY BE ON A SEPARATE SHEET NOT IN THE TEXT. The description must be as short as possible. Good sketches are not required, as our art department will work out rough sketches, submitted by contributors. IT IS THEREFORE NOT NECESSARY FOR CONTRIBUTORS TO SPEND MUCH TIME IN SKETCHING VARIOUS IDEAS. When sending contributions enclose return postage if manuscript is to be returned if not used. ALL CONTRIBUTIONS APPEARING IN THIS DEPARTMENT ARE PAID FOR ON PUBLICATION.

Notice.

There seems to be a misunderstanding on the part of some of our contributors as to the kind of articles wanted for our magazine. We are always glad to receive original articles on any of the subjects covered in our publication. *We do not, however, want articles which have been copied from other magazines, or published books.*

Recently two such articles have been submitted to us, the source of one of which was discovered after the manuscript had been edited and the type for same set up for publication. Needless to say, we did not publish it. The other article was published in our magazine and we received a rather indignant letter from one of our readers in which he says in part, "It seems to me a pity that you should publish as original, things that have been published before in other books."

We do all we can to avoid using articles which have been taken from other books or magazines, but as we cannot be familiar with the entire contents of all the books and magazines published, an article is occasionally overlooked and published by us in good faith. Whenever any of our readers discover such articles, we should be glad to have them let us know of it.


FIRST PRIZE TWO DOLLARS.

UNIVERSAL DETECTOR.

The parts of the detector are mounted on a hard wood base $2\frac{1}{2} \times 3\frac{1}{2} \times \frac{1}{2}$ inches. The edges may be beveled to give a better appearance.

Next make two U-shaped standards (A^1 and A^2) of spring brass, using material $\frac{1}{2}$ inch wide and 1-16 inch thick. They should stand about two inches high, thus requiring $4\frac{1}{2}$ inches of material for each standard. One of these clamps the mineral while the


other supports a $\frac{1}{2}$ inch brass ball (B), which is held in place by prac-

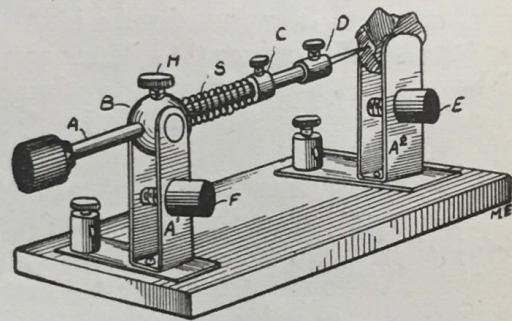

- FIG. 1 -

tically the same method used on the back of wireless receivers, and allows the rod A to be moved in various directions.

By studying the drawings one will easily be able to understand how the detector works. Suppose you want to

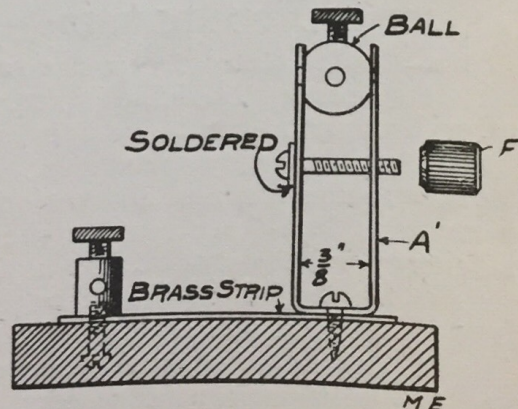


- FIG 2 -

use a mineral that requires a rather heavy pressure on its surface. Place the mineral in standard A^2 using the knob E to clamp it tight. Thumb-

screw H must be loosened so that rod A is able to slide back and forth through ball B. The pressure of the point on the mineral is regulated by the collar C, by changing the tension of the spring S.

All that is necessary now is to place the point on a sensitive spot of the mineral. Silicon, carborundum, and pyron are generally used with the set screw H loose, using the spring S to push the point against the mineral. Galena is an excellent mineral to use.

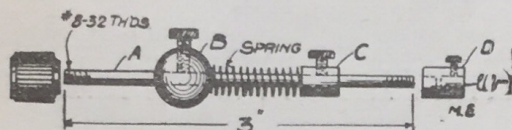

-FIG. 3-

The detector may be used as a perikon type, by clamping the zincite in A² and for the other mineral solder a piece of bornite in a cup having a shank on it, and clamping the shank in the tip D.

The writer has made two of these detectors and mounted them on his receiving cabinet, using a double point switch to change from one to the other. By connecting two detectors this way they may be easily adjusted to the highest degree of sensitiveness, which they possess.

Contributed by

R. COWDEN.

SECOND PRIZE ONE DOLLAR.

AN OIL CONDENSER.


An authority states that more sending sets prove inefficient through losses brought about by a poor condenser than from any other one thing, losses in some stations amounting to as much as 33 1-3 per cent. of the total energy. Why not save this lost energy by building the condenser right in the first place?

From any large photographer procure 40—8x10 inch used plates. He will give you all that you can carry away. These plates are particularly suited for this purpose as they are absolutely free from flaws of any kind. Clean the plates in hot water and dry them thoroughly. These plates may

seem small but they allow the use of six-inch tinfoil, which is much easier to procure than wider sizes.

Between two and three pounds of tinfoil will be needed as the lugs and plates are to be cut in one piece. Cut the pieces 6x8 inches with a lug 1 inch wide and 3 inches long on one end. Alternate these lug ends so that on adjacent plates the lugs come out at opposite ends of the pile of plates. The first lug should be placed as at A (Fig. 1); the next two as at B (Fig. 1); the next three as at C (Fig. 1); the next four as at D (Fig. 1); the next ten as at E (Fig. 1), and the remaining twenty as at F (Fig. 1).

The glass plates should now be thinly coated with vaseline; the plates of tinfoil placed on the glass so as to clear the edges by one inch all around, and the foil rolled tight to the plate. The vaseline makes an excellent adhesive for this purpose, and as it does

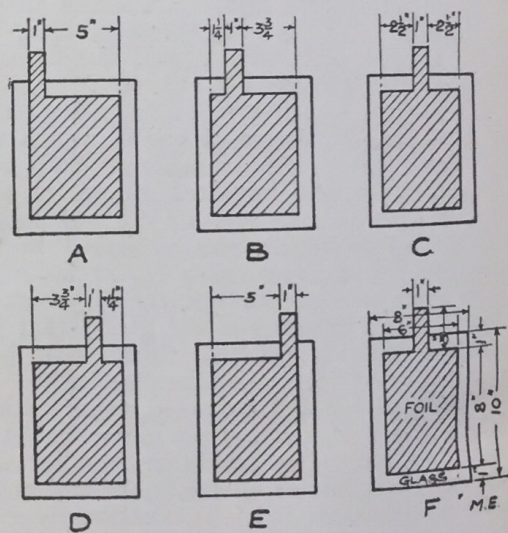

-FIG. 1-

not harden all of the air can be gotten out from under the tinfoil. When the foil is all rolled tight coat the whole plate with from one-sixteenth of an inch to one-eighth of an inch of vaseline. Treat the remainder of the plates in a similar manner. Now pile up the plates so that at one end 20 lugs are at the center, while at the other end there are five bunches of 1, 2, 3, 4, and 10 lugs each respectively. These bunches of lugs must come from consecutive plates and be on the same part of the plate. The pile should look as in Fig. 2. Compress the pile and tape it together.

Build a box of oak ($\frac{5}{8}$ inch stock) 10x14x5 inches (outside measure). Miter or rabbet the corners, glue the bottom on, and fasten the top on with nicked round headed brass screws. The box may be filled and varnished or just shellacked as preferred. It should be well shellacked inside, however. On one end of this box a hard-rubber or fiber plate $\frac{1}{4}$ x4x9 inches should be fastened. On this plate mount five 15 ampere S.P.S.T. knife switches and two large binding posts.

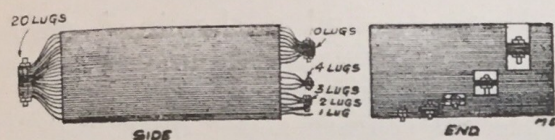


FIG. 2.

One end of every switch should be connected to one of the binding posts by a copper bus-bar. The five other ends are connected to the five bunches of lugs 1, 2, 3, 4, 10, in order. The lugs at the other end of the plates are all connected together and to the other binding post.

This about completes the construction. By this arrangement any number of plates from one to twenty can be cut in by closing the proper switches. For instance, if 17 plates were desired, the switches connected to the bunches of 3, 4, and 10 plates would be closed, and so on. The thick vaseline cuts out the brush discharge almost entirely and furthers the general insulation. This condenser was designed for use on any coil or transformer up to and including $\frac{1}{2}$ kw., but any larger size can be built accordingly.


Contributed by

L. W. TELLER.

AN AUTOMATIC TELEGRAPH RECORDER.

A simple telegraph recorder can be made from a telegraph sounder by attaching a pen to the arm by means of a strip of brass. Under the pen is a roll of paper moved by a small motor. The relay used in series with the sounder is made up of two differently wound magnets and a magnetized armature.

With the current flowing in a certain direction the armature will move in that direction, closing the circuit and starting the motor. The armature will remain there by force of gravity until an opposite current moves it, thus opening the circuit. The relay can be made with little trouble from a couple of old magnets and a long piece of magnetized steel. Mount as shown in the sketch, pivoting the armature at the bottom.

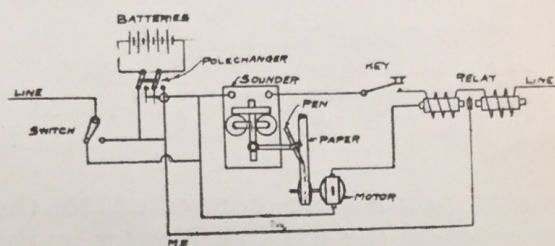

At the first tick the relay closes, starting up the motor which turns the roll of paper. The sounder presses the pen down on the paper making a dash. The pen then proceeds to take down the message until finished, when the operator at the other end of the line changes the direction of the current he is sending. The relay is then opened and the motor stops.

In the sketch the proper connections are shown. The switch at the left is to cut out the batteries when not needed. Paper in rolls may be bought at a supply house. With a little experimentation the reader will find out how fast to run the motor which turns the roll of paper.

Contributed by

HAZEN PRATT.


AN IMPROVED POULSEN TICKER.

For all operators who are able to hear any of the various Poulsen stations in the United States, an efficient "Ticker" will prove of considerable pleasure and interest. The "Ticker" to be described is very simple of installation and operation.

A low resistance telegraph relay comprises this "Ticker." This may be purchased new at any supply house from three to four dollars, and second hand, for very much less.

The magnets of the relay are connected to any alternating current


source of electricity in series with a 16 c.p. lamp and suitable means for making and breaking the circuit. The other two binding posts on the relay, which are connected to the platinum

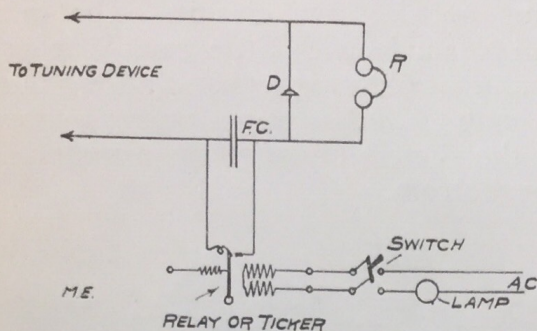

-FIG. 1-

contact points, are connected to the two sides of the fixed condenser in the receiving circuit. Two different hook-ups are shown below.

Whenever the familiar frying of the Poulsen arc is heard, the "Ticker"

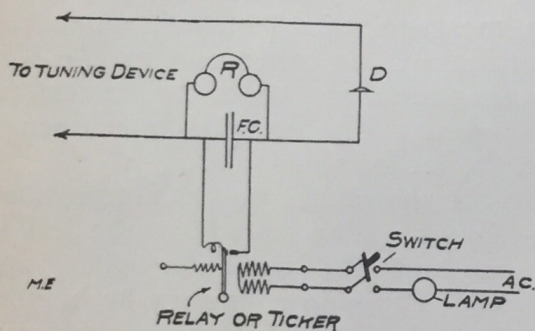

-FIG. 2-

should be switched onto the A.C. mains, and the signals may be read as easily as with the spark system of wireless telegraphy.

This "Ticker" will prove much more efficient than those which are directly connected to the rectifying element in a detector. The moment that the "Ticker" is disconnected from the A.C. current, the set is receptive for spark system signals.

Contributed by

ELLERY W. STONE,
California.

ANOTHER WAY TO LIGHT GAS.

I have read with interest the account of the well known gas lighting experiment as described by Samuel Cohen. It will be understood that the wire should be insulated when it is twisted

around the gas burner. But in fact, the wire is not necessary at all. Under the conditions mentioned by Mr. Cohen, the spark from the bare fingers applied to the tip of the gas burner, from above, will ignite the gas without injury to the fingers. I have performed the experiment dozens of times in cold dry weather.


Contributed by

WM. MAVER, JR.

FIXED CONDENSER.

Herewith find a sketch of a fixed condenser, which I think will be very efficient in wireless work.

It will require a one quart fruit jar and a strip of tinfoil 3 inches wide

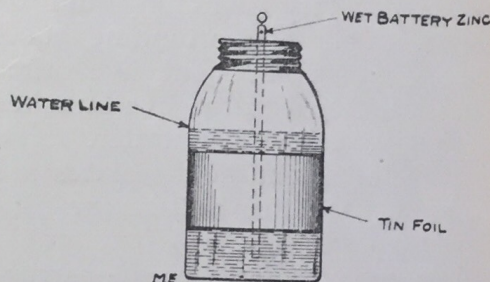


and long enough to go around the jar, and a wet battery zinc. Remove the glass from under the can cover and bore a hole in the top of the cover, next fill with water up to dotted line on sketch, add a teaspoonful of salt to the water. The sketch will explain the rest.

Contributed by

JOHN HOGAN,

A SIMPLE ELECTROSCOPE.

Make a small arrow about $2\frac{1}{2}$ or 3 inches long of light stiff paper, Fig.

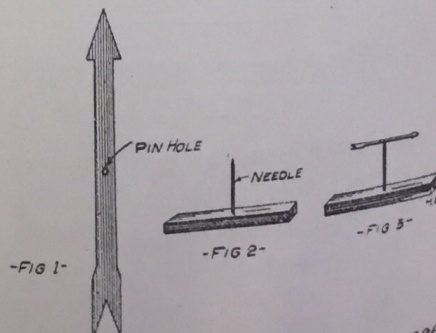

1. Into a pine board stick a needle with the point up, Fig. 2. Mount the arrow on the needle by making a small


hole with a pin point, Fig. 3. If a piece of writing or other soft paper is rubbed briskly with a pencil, the paper when held close to the arrow will cause same to turn and will follow the paper. This is a simple and easy experiment, and the apparatus costs practically nothing.

Contributed by

STATES FINLEY.

WEATHER VANE.

The drawing attached is a design of an indicating weather vane, to determine approximately the direction of wind at any time. The apparatus can be assembled at an inconsiderable expense. The wire, 6 batteries, switch and 8 small one candle electric lights, constitute the material to be purchased. The housing for the contacts is a common can. It will be noted that as

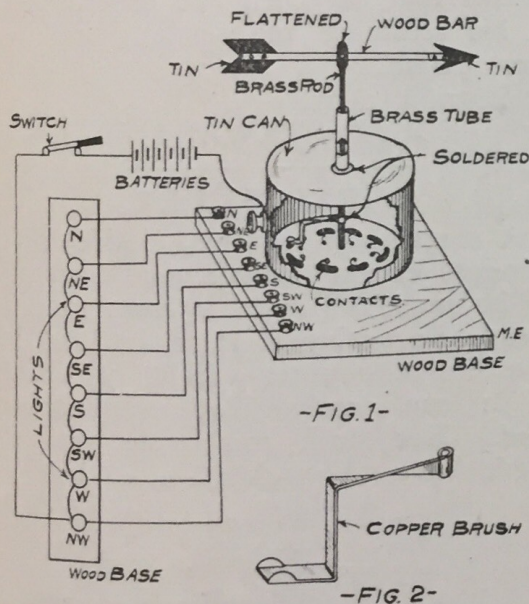

the vane revolves according to the direction of the wind, the brush comes in contact with the brass pieces and completes the circuit through one of the lamps. The lamps are marked with letters corresponding to the points of the compass. The brush, Fig. 2, is made of sheet copper.

Contributed by


EDWARD CRAIG.

VARIABLE CONDENSER.


In the September issue of this magazine appeared a Novel Variable Condenser contributed by R. S. True, one

of which I made and found to be alright, except for the cloth covered wood rolls. I found it almost impossible to get them to run true. When the glass plate was moved up or down rolls would move away from plate just enough to prevent the tinfoil from making a good contact with plate.

So I made a device as shown in enclosed sketch which is composed of four brass strips two on each end of plate $\frac{1}{2} \times 16 \times 5$ inches long, the strips having 3-16 inch holes bored $\frac{1}{2}$ inch from each end, and two small coil

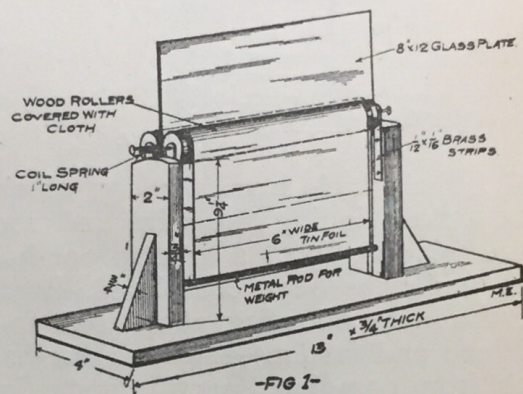

springs, one for each end of the condenser. These are slipped over the screws together with the brass strips before the screws are put into the wood rolls. I have found this to give fine results and it works very smoothly when glass plate is moved up or down. As the brass springs hold rolls firmly against plate nearly perfect con-

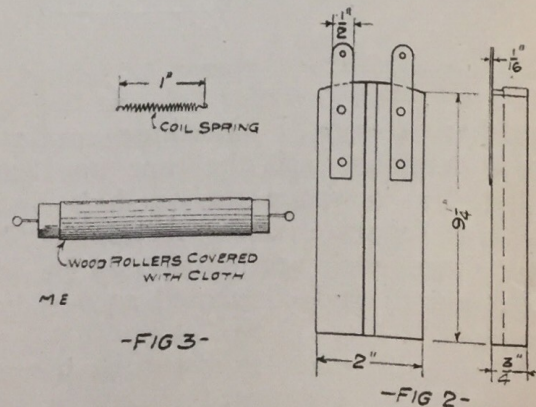

tact between the tinfoil and the glass is secured. The enclosed sketches will fully describe everything.


Contributed by

CLARENCE E. CHAMBERLIN.


A SIMPLE LOADING COIL.

A simple and efficient loading coil for receiving long waves may be made as follows:

Make a hollow tube of cardboard eight inches in diameter and eight inches in height. Boil the tube in paraffine until the bubbles cease to come from the cardboard. Procure several hundred feet of No. 24, B. & S. gauge enameled wire.

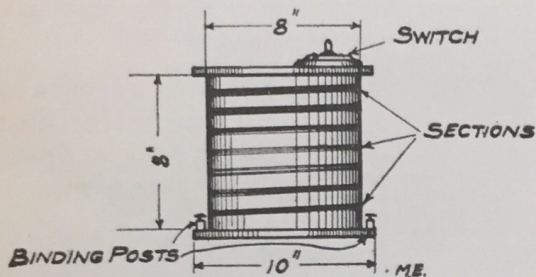

One half inch from the top of the tube start winding the wire and continue winding until a section one-half inch wide has been completed. Break off the wire allowing about one foot for lead and fasten. Measure one-half inch from completed section and wind

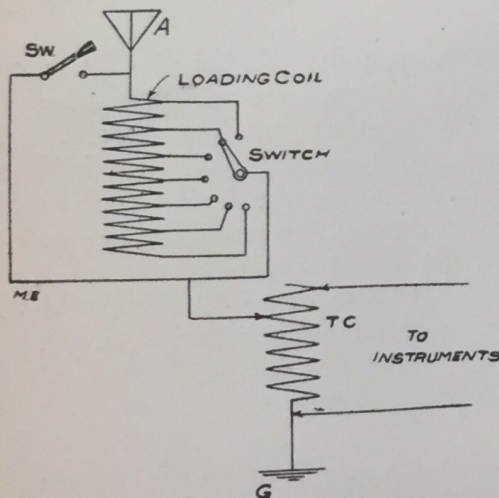

another section. Continue making these sections until the tube has been filled but a space of one-half inch should separate each section. The lead from each section should be led to a switch and connected as per diagram.

This coil makes a very neat instrument when constructed with care and is capable of getting those high-powered stations with ease.

The coil will be greatly improved if end pieces are added and the switch mounted on one end.

Contributed by

ALLEN DAHLQUIST.

GROUND CONNECTIONS.

Most amateurs pay least attention to their ground connection. The average experimenter does not consider that the ground is the essential part of a wireless station. A bad ground connection will cause trouble, and the operator will go searching around the instruments to ascertain the trouble without giving the ground connection a thought.

The easiest ground is a water pipe, which will be found very efficient and not much trouble, the wire may be connected by means of a ground clamp. It is best not to solder a water pipe as nine times out of ten it will break, the heat melting the lead. A gas pipe may be used to fairly good advantage but not to a very good effect. If neither are convenient a piece of sheet copper of a conical shape, filled with charcoal, with a wire soldered to it buried in a damp place, will be found to be as good as a water pipe.


This hint may help the experimenter in his receiving and sending range to some extent.

Contributed by

EDGAR STEWART FRARY.

WIRELESS KEY.

A contributor sent in a design for a wireless key in which the contacts are to be made of *swiss cheese*, and instead of a spring to raise the lever he specifies a counter-weight consisting of a cup partly filled with *molten lead*. Hot stuff, this! He says you don't have to work it,—just hold it

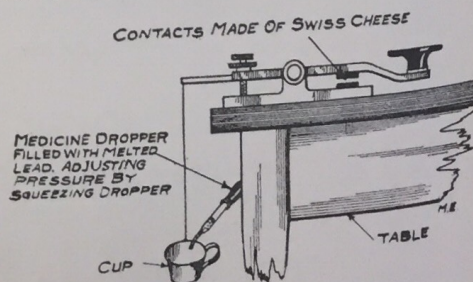

down. We would like to see anyone hold down a combination of *swiss cheese* and *molten lead*. What?

TELEPHONE RELAYS.

Those now in service are called Ampliphones. If they prove to be constant and reliable they will be used generally (a) to enable ordinary messages to be read without the use of a head telephone, (b) as a call, (c) to

increase the absolute difference between signals of different strengths, thus enabling the message desired to be read through interference or static, (d) to step-up signals so weak that they could not otherwise be read and thus increase the range of communication, (e) as a resonance device responding within limits to a single spark frequency, thus cutting out interference, (f) for separating signals of different wave train frequencies so that several messages of different frequencies can be received at the same time on the same aerial, (g) to automatically record incoming signals.

Coharer detectors change their resistance sufficiently to work a relay which actuates a call, tapper and recording apparatus. The induced currents rectified by crystal and valve detectors are too weak to produce visible material movement, and the same is true of the direct currents produced by the momentary depolarization of the electrolytic detectors.

It has been found, however, that these currents will produce sufficient movement of the diaphragm of a receiving telephone to alter its pressure on a microphonic contact, this alteration being enough to change the conductivity, and thus increase or decrease the current in a circuit containing the contact, a battery and another telephone. This change in current moves the diaphragm of the second telephone and its movements can either be read directly as sound or made to change the current in another circuit by change of pressure on another microphonic contact. One or more of these microphonic relays produces sufficient action in a loud speaking telephone to be heard in the operating room.

When used as a resonance relay the relay diaphragms are mounted so as to have a pronounced mechanical period of vibration and act as wave filters or weeding out circuits, responding most efficiently only to wave trains of a frequency the same as their own. The sound produced by the last one in circuit (the loud speaking telephone) may be intensified by attaching to it an air pipe whose note is the same as that of the diaphragm in vibration.

The use of recording apparatus was necessarily abandoned when coherers

were no longer used. It is possible that microphonic relays referred to in the preceding article will again permit the use of recording and calling apparatus. Both tend directly to economy in the operation of wireless stations by reducing the number of operators to a minimum.


Contributed by

STANLEY E. HYDE.

A "MICROMETER" TUNING ARRANGEMENT.

Oftentimes a single turn of wire on a tuning coil will not suffice for close tuning. Herewith is shown a device with which the closest tuning may be accomplished.

Stretch a piece of No. 14 bare copper wire between two porcelain insulators as shown in sketch, then take an "Electro" spring binding post and place two hard rubber knobs as shown in Fig. 1.

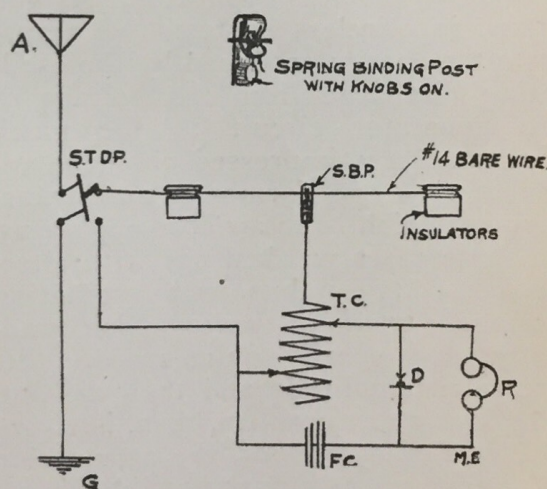

Solder a piece of flexible lamp cord to end of post and thread on a two-inch length of soft rubber tubing, and slip well up on joint; fastening it in place with a little glue.

The binding post may now be placed on the wire. To tune, adjust your coil or transformer as well as possible, then grasp the knobs between thumb and forefinger and slide along the wire until the best position is reached. It is absolutely necessary to have the post well insulated or you will ground the signals through your body.

Contributed by

F. E. SICKLES.

IRON CORES FOR WIRELESS OSCILLATION TRANSFORMERS.

On November 13th, 1911, at a meeting of the American Institute of Electrical Engineers, Mr. E. F. Alexanderson, of the General Electric Company presented a paper entitled Magnetic Properties of Iron at 200,000 cycles.

Inasmuch as this frequency corresponds to a wave length of 1,500 metres, and comes well within the range of frequencies employed today in wireless telegraphy, it appears that perhaps the efficiency of wireless transmitting sets may be improved by the addition of properly designed iron cores in the oscillation transformers.

We reprint below, a portion of Dr. Steinmetz's discussion of the paper in which he expresses the belief that such improvement should follow the judicious use of iron in these transformers. He says, in part:

"This may have an industrial value bearing in wireless apparatus. As you know, in wireless systems we transform the energy produced by the oscillating discharge from the voltage of the generator circuit to the much higher voltage impressed upon the antenna, by a transformer or auto-transformer, which is an air core apparatus. In these cases we deal not with alternating voltages, but with oscillating voltages; trains of waves which gradually, and usually quite rapidly, decrease in amplitude and then die out. The important problem, then, is to get the rate of dying out, the attenuation of the waves, as low as possible, to get as well sustained waves as possible, that is, to reduce the losses in transformation.

"Iron has not been used in these transformers, not always because people did not believe iron would follow the frequency, but because the general impression is that the losses in the iron, even when as thin as commercially feasible, would be so formidable as to greatly increase the attenuation, increase the rapidity of dying out of the wireless wave."

* * * * *

* * "this investigation seems to show that by using an iron core of proper proportion at wireless telegraph frequencies, we can materially

improve the efficiency of the transformer or auto transformer, and so reduce the attenuation of the oscillating wave, and that is the problem of the power in wireless telegraphy.

"Naturally, this design may be more or less, possibly materially modified, by the problem of the voltage that we have to generate, and the necessity of insulating for the voltage, which must be taken into consideration; but in general it seems from the conclusions of this paper that there should be a material advantage in wireless telegraphy in using iron core transformers, or auto transformers, instead of the air core apparatus used at the present time."

Anyone interested can probably obtain a copy of the paper by applying to the Secretary of the American Institute of Electrical Engineers, 33 West 39th Street, New York City. The complete discussion appears in the January issue of the A. I. E. E. Proceedings, from which the above quoted portion is taken.

Book Review.

ELECTRICITY AND ITS EVERYDAY USES.


By John F. Woodhull, Ph.D.

Published by Doubleday, Page & Co., Garden City, N. Y. Contains 357 pages, 200 illustrations, aside from the colored frontispiece and title page. Bound in heavy linen, embossed with the design. It is not sold separately, but included as a unit of an entire Library set.

This volume, is one of a series known as "The Children's Library of Work and Play." It is written in a popular fiction form, bringing in the technical points on electricity in a non-technical and interesting manner. The story method of explaining technical subjects proves far more efficient in general, and in this work in particular.

Every phase of electricity is touched upon, from the power plant to the incandescent lamp. Simple explanations are given on the construction of simple electrical apparatus, and in fact the reader is taken to the different power plants and other electrical establishments, and explained each apparatus in turn. At home he is shown how simply the principles may be illustrated with simple household articles.

NOTE.—The price of Modern Electrics will be increased with the April number. Single copy, 15 cents; subscription price for U. S., \$1.50; New York City and Canada, \$1.85; foreign, \$2.00. Subscribe to-day at the old price and save money.

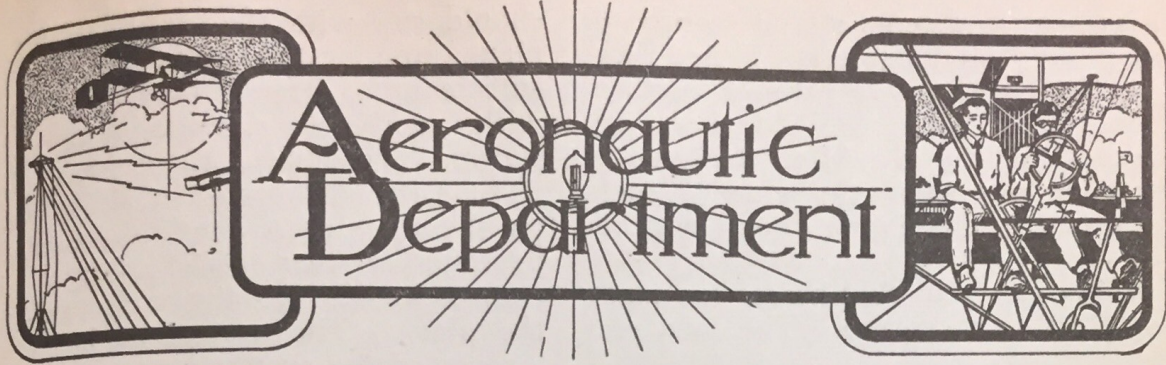

Construction of a Practical Glider


By Philip T. McCutchen.

IT is a very difficult matter, when one first makes up one's mind to build a gliding plane, to decide, apart from any question of dimensions, what type of machine is most suitable to his requirements. I know of two men who made a 40 foot glider in a small workshop in the city, and not having any other convenient space, erected it, when complete, in the street at 3 o'clock in the morning, preparatory to hauling it to the flying ground.

The case of the purchaser of the

type of glider for the reason that it is fully controlled and is fitted with a landing gear.

A room or building about 18 to 20

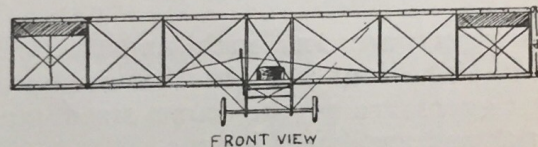


FRONT VIEW

feet square will be required as a workshop. In this room all the parts may be finished for assembling, of course, if a larger space is available all the work of assembling and construction may be done in one place.


In building any type of flying machine the woodwork used should be straight grained and absolutely free from knots.

Now to build the machine. First prepare 8 long spruce beams $\frac{3}{4} \times 1\frac{1}{4}$ inches and 13 feet long. These are for the main wing bars. Sixteen spruce struts or uprights should be made of $\frac{3}{4} \times 1\frac{3}{8}$ inch stuff 4 feet long. Fifty-four spruce ribs are made of $\frac{5}{8} \times \frac{1}{2}$ inch strips. They are separately steamed to shape over a large pot covered with a disc of tin in which a trough is bent to allow the whole length of

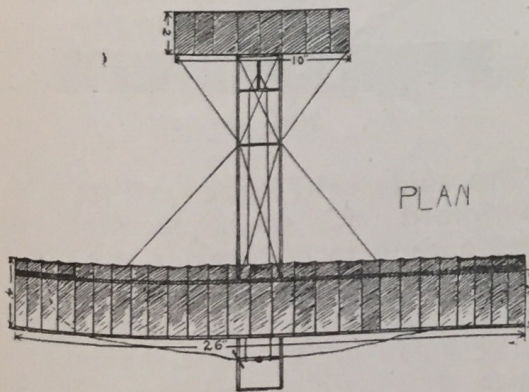

complete machine is of course a simpler matter; his troubles resolve themselves into a choice of type at his price, storage and ground. To the constructor there are to be faced, in addition, difficulties varying with personal conveniences to hand-workshop accommodation, the expense to which he perhaps rightly wishes to make a limit, the ground, and the means of transport from workshop to hangar.

In either case, however, the first question is of type, as upon this most of the other considerations depend. The machine described in the following lines is superior to the ordinary

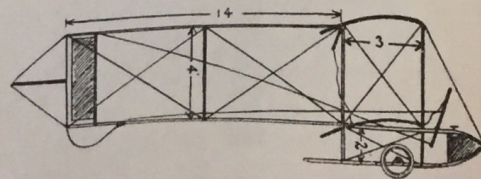


SIDE VIEW

the rib to pass through the steam. The wood soon becomes pliable after which

it is bent to a templet and secured in place by some long bolts. When thoroughly dry they are given 2 coats of very hot, thin glue, which makes them keep their shape. After the glue is dry the ribs should be given 2 coats of shellac to render them weather proof.

The skids and skid braces are made of $1\frac{1}{2} \times 1$ inch spruce. The four rear

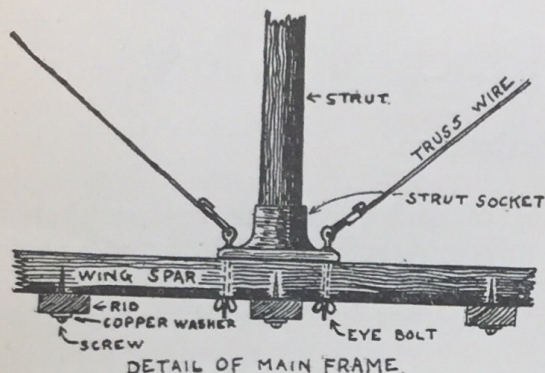


outriggers are 1×1 inch and 14 feet long. The four uprights between the outriggers are of the same sized material and are 4 feet long.

The rudder and ailerons are made of $\frac{1}{2} \times \frac{3}{4}$ inch spruce.

The framing of the main planes should be made first. The curved ribs are screwed to the wing bars at intervals of one foot, using small $\frac{1}{2}$ inch screws fitted with copper washers. When this operation is completed the rear ends of the ribs should be wired. This is illustrated in the drawing.


The frame is now ready for the covering. Almost any light cloth is suitable, although cambric or muslin are preferable. The cloth should be at least 38 inches wide, weighing about 2 ounces to the square yard. It is tacked to the front wing spar and is glued to the ribs with waterproof glue,

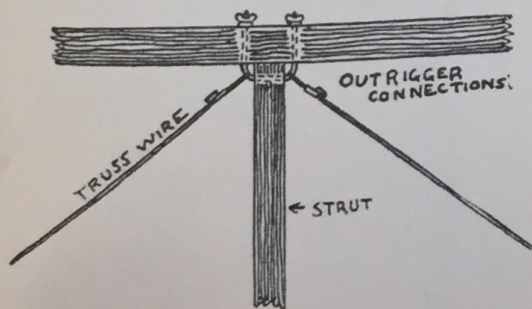

(ordinary glue containing linseed oil). The edges where the fabric is turned over the rear wire being cut into a few gores. An overlap of about 2 inches should be allowed. The cloth

should run with the warp across the plane, so that the width will just be sufficient to stretch over three ribs with, at the ends, an allowance for turning over on to the sides of the ribs. Glue and brads should be used on the ribs where one piece of cloth overlaps another. The fabric is of course, applied to the under side of the plane. The normal angle of incidence of the sustaining surfaces will be about 1 in 8, or a little over 7 degrees. Allowance is made in the center of the planes whereby a section of the cloth is laced to the frame in order that the two sections of the planes may be readily taken apart.

Aluminum strut sockets of sufficient size to accommodate the struts are then fastened to the wing spars with eye bolts $\frac{1}{8}$ inch in diameter. The struts are fitted in the sockets and the biplane is ready for wiring. No. 16 piano wire is used for trussing. The wire joints are made as shown in the drawings.

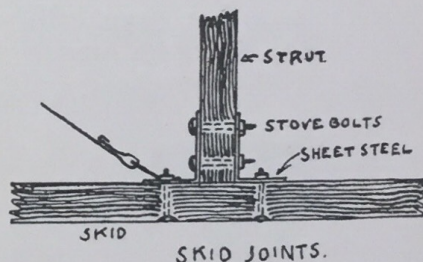

The skids, skid braces and seat rests are joined with small pieces of sheet steel and $\frac{1}{8}$ inch diameter stove bolts. This is also clearly illustrated.

The rear plane, rudder and ailerons being made of the same materials require very little description. The ribs and cross-pieces are joined with strips of tin nailed to the wood. All these surfaces are double covered with cloth.

Two 20 inch wire wheels and a light wood axle serve as a starting device. This arrangement is fitted with rubber spring shock absorbers.

All the movable controlling surfaces are attached to the rigid frame by leather straps, which form flexible joints.

The wooden control lever is fitted with a universal joint at the lower end. This allows free movement in four directions. Moving the lever from side to side operates the ailerons and push-

ing it forward and drawing it back operates the elevating plane at the rear.

The rudder is operated by a foot lever pivoted to the seat rests.

When the machine is complete and ready for test flights take it to the top of a gradual hill in a large open space and set the glider so that it faces the wind, which should be blowing at least 10 miles an hour. Then get into the seat and give the word to your helper to give a good shove. The glider will start forward and with increasing speed will begin to lift. When you feel that you are off the ground give your attention to bringing the machine up to an even keel. The balancing movements should be careful and sure, do not become rattled and move the lever too far in any direction as it is liable to cause a "spill." To make a landing push the lever forward sharply and hold the position until the machine is close to the ground then quickly straighten the machine out.

Beginners should only make short flights at first, the length increasing with the experience gained. If this method of learning is followed you will become thoroughly proficient in a short time.

A MOTOR FOR MODEL AEROPLANES.

The motor represented in the drawing works on very much the same principle as the ordinary rubber strand motor, except that it has an additional part which gives it a high and steady velocity until it is fully unwound.


From a piece of light wood $\frac{1}{4}$ of an inch thick cut a disk 3 inches in diameter.

Taper from the center outward until the disk is 1-16 of an inch thick at the edge.

One eighth of an inch from the edge drill a circle of small holes $\frac{1}{2}$ an inch apart. These holes should be large enough to admit the size of rubber strand to be used. Drill a $\frac{1}{8}$ inch hole at the center of the disk for the shaft. Obtain, for a shaft, an aluminum or steel rod $\frac{1}{8}$ inch in diameter and 25 inches long. Twelve inches from one end drill a small hole and force a piece of iron wire $1\frac{3}{8}$ inches long through it leaving $\frac{5}{8}$ of an inch

projecting on either side. One-fourth of an inch from the rod on either side bend the wire at right angles and parallel with rod. Drill two small holes through the disk $\frac{1}{4}$ of an inch on opposite sides of the center, fit the disk to the shaft, forcing the small wire through the corresponding holes in the disk, and bend down on other side.

Construct a support for the shaft as in Fig. 1 of the diagram and around each bearing drill holes corresponding to those in the disk, as in Fig. 3.

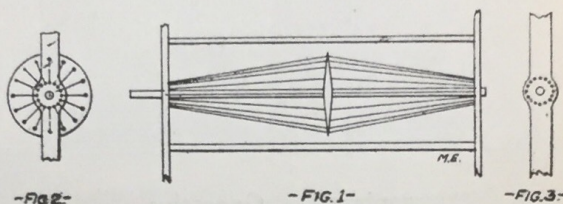


When the shaft is installed in the bearings pass the rubber strands (without stretching) through the holes in the disk and the corresponding holes around the bearings. Hold the strands in place by knotting them on the outside of each bearing. When the propeller is fastened to the end of the shaft, the motor can be wound up by twisting it.

THE AERO-PHONE.

The accompanying illustration shows a new device, known as the AERO-PHONE, which is designed to enable aviator and passenger, or a racing autoist and his mechanic to converse freely. Without such a device, conversation, under these circumstances, would be all but impossible, on account of the roar of the motor and the wind rushing past one's ears. The device is thoroughly protected by patents.

The AERO-PHONE consists of two special watch case receivers, mounted in the ear flaps of the regular aviator's helmet. These flaps fasten under the chin and hold the receivers snugly and comfortably against the ears. Connected with these receivers is a very light weight transmitter of special construction. The transmitter is held in place over the mouth by a band of soft, pliable kid. A long flexible, light cord with a plug at its end serves to connect the helmet, with its

receiver and transmitter, to the rest of the apparatus, which is contained in a small, neatly finished case made of hardwood and finished in a weather-proof material. Inside and at each end of the case there is a jack made

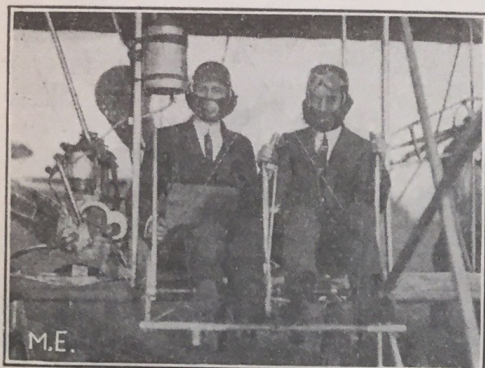

Aeroplane in Operation.

to fit the plug on the end of the helmet cord. Connected with these jacks are a few small batteries and the apparatus for magnifying the speech. When in use the box is fastened to the

plane and when the operator and aviator are ready to communicate, they slip their plugs into the jacks. The circuit is automatically made and the apparatus is ready for communication. There is nothing complicated about this and any one may use the apparatus. It is very rugged and practically impossible to get out of order. It allows the free use of both hands by the aviator and passenger, a very important and valuable feature for military use or for the instruction of pupils.

On one end of the box there are two binding posts for wireless work, these binding posts are to be connected to the receiving side of the aeroplane wireless telephone or telegraph set. There is also a clever arrangement whereby the aviator and passenger can carry on either singly or together clear communication with the earth or another aeroplane without removing their hands from the controls.

VOTING BLANK


In order to know exactly what our readers desire for the coming year we have prepared below an Australian voting ballot.

Our old motto "TO PRINT ONLY WHAT OUR READERS WANT" still holds good, but YOU must give us your opinion, without it we cannot make the magazine the way you would like it best.

The editors will appreciate it greatly if you will fill out the blank below by placing a cross opposite the article or item you like best, or do not like. Paste the blank on the back of a postal and mail it to the editor.

IT ONLY COSTS YOU ONE CENT TO DO SO AND YOU WILL GET A BETTER MAGAZINE AS THE RESULT. Do it NOW before you turn this page and forget it. Success resolves itself in doing things to-day, TOMORROW IS NOT PATENTED AS YET.

Make Cross Here X		Make Cross Here X	
I like Modern Electrics the way it is.....	I would like another serial story by Mr. Gernsback
I do not like Modern Electrics the way it is....	I like short stories
I like "The Practical Electrician".....	I do not like short stories.....
I do not like "The Practical Electrician".....	I like the Experimental Department.....
I would like longer installments of "The Practical Electrician".....	I do not like the Experimental Department....
I like scientific articles.....	I like the Aeronautical Department.....
I do not like scientific articles.....	I do not like the Aeronautical Department....
I like popular articles.....	I like the "Wireless Telegraph Contest".....
I do not like popular articles.....	I do not like the "Wireless Telegraph Contest"....
I like articles "How to make Things".....	I like the Department "With the Inventor"....
I do not like articles "How to make Things"....	I do not like the Department "With the Inventor"
I would like more articles on Wireless.....	I like the "Paris Letter".....
I would like less articles on Wireless.....	I do not like the "Paris Letter"
I like Mr. Gernsback's serial story.....	I like the "Oracle".....
I do not like Mr. Gernsback's serial story.....	I do not like the "Oracle".....
Other Suggestions			
Name			
Address			

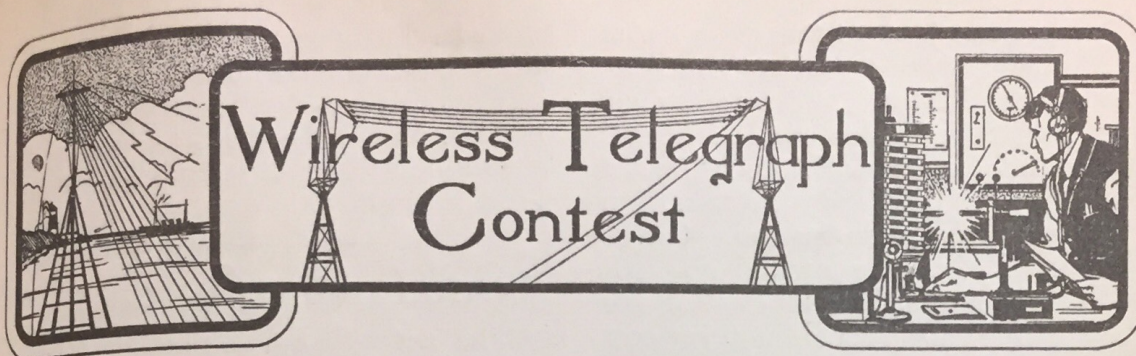

Our Wireless Station and our Laboratory Contest will be continued every month until further notice. The best photograph for each contest is awarded a monthly prize of Three (3) Dollars. If you have a good, clear photograph send it at once; you are doing yourself an injustice if you don't. If you have a wireless station or laboratory (no matter how small) have a photograph taken of it by all means. Photographs not used will be returned in 30 days.

PLEASE NOTE THAT THE DESCRIPTION OF THE STATION MUST NOT BE LONGER THAN 250 WORDS, AND THAT IT IS ESSENTIAL THAT ONLY ONE SIDE OF THE SHEET IS WRITTEN UPON. SHEET MUST BE TYPEWRITTEN OR WRITTEN BY PEN. DO NOT USE PENCIL. NO DESCRIPTION WILL BE ENTERED IN THE CONTEST UNLESS THESE RULES ARE CLOSELY ADHERED TO.


It is also advisable to send two prints of the photograph (one toned dark and one light) so we can have the choice of the one best suited for reproduction.

This competition is open freely to all who may desire to compete, without charge or consideration of any kind. Prospective contestants need not be subscribers for (the publication) in order to be entitled to compete for the prizes offered.

FIRST PRIZE THREE DOLLARS.

Here is a flashlight of my wireless telegraph outfit.

The receiving set consists of, double-slide tuner, large loose-coupler, variometer, fixed and variable condensers, loading coil, silicon, perikon and carborundum detectors, and Brandes 2,000 ohm head set.

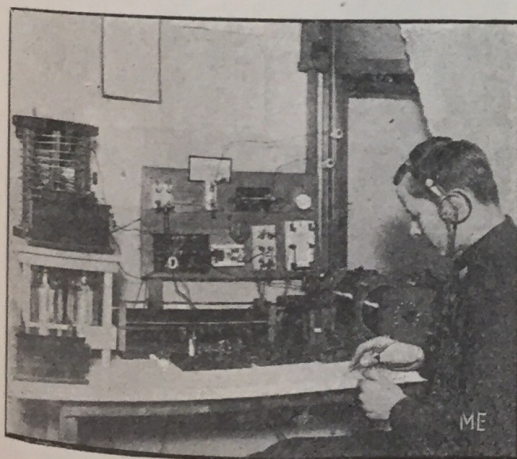

Harry Station.

For sending I use two coils, one, 1 inch and one, $\frac{1}{2}$ inch; aluminum wire helix, zinc spark gap, Leyden jar condensers, anchor gap, ammeter in series with aerial, and telegraph key with large contacts.

By the use of 2 D.P.D.T. switches, I can use either the double-slide tuner or loose-coupler.

All necessary switches are shown on the switchboard. I use heavy glass tubing for bringing in the leading in wires.

I use a 6 volt 60 amp-hour storage battery for operating the coils.

My aerial is composed of six strands of copper wire 45 feet long, 48 feet above the ground.

I have obtained excellent results from this outfit and am in constant communication with a friend living a few miles away.

Modern Electrics has given me many helpful hints and I consider it the best magazine for the amateur.

CHARLES HARRY,
Michigan.

HONORABLE MENTION.


Here is a photo of my wireless telegraph station which has taken me about two years to complete.

For sending I use a small closed core transformer which was made from instructions in September, 1910, issue of *Modern Electrics*. It is run direct from the 110 V. A. C. current and gives a good spark, also, a helix wound with No. 7 wire, glass plate condenser, seen in front of the transformer on the left, spark gap, and a key which has a condenser bridged across the terminals to prevent sparking.

The receiving set consists of a single slide tuner in front of which is a large variable condenser, fixed condenser, electrolytic, peroxide of lead and silicon detectors, and 1,000 ohm phones, behind which is a potentiometer.

On the switchboard there is a switch for cutting in the various detectors, one for the battery, and one for cutting in the potentiometer. There is also a test buzzer which is shown to the right of *Modern Electrics*, and below this is a push button. On the sending side is the switch for controlling 110 volts, fuse block, hot wire meter which, however, is not yet complete, switch for same, and the aerial switch.

The aerial is composed of four cop-

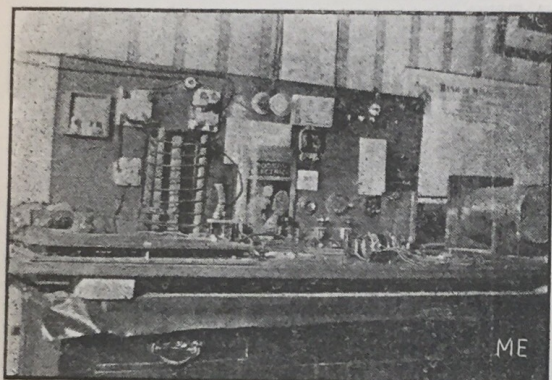


Mott Station.

per wires 65 feet long and elevated at the highest end forty-five feet.

HAROLD MOTT,
Manitoba.

A CORRECTION.

Last month we printed a description of Mr. Willard S. Wilder's wireless station, but the photo was of someone else's station. Mr. Wilder called our attention to the mistake and enclosed this photograph which we cheerfully print in correction of the error. We

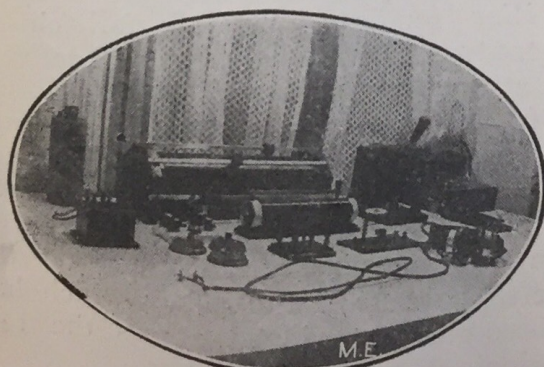

Wilder Station.


receive a lot of descriptions and pictures each month, many of the pictures being enclosed, loosely, with the letters describing them, and having no names on the backs to identify them. For this reason we sometimes get them

mixed. Perhaps this is the reason for the mistake in the present instance. If our contestants would put their names on the backs of their pictures there would be no chance for mistakes of this kind to happen.

HONORABLE MENTION.

The accompanying photograph was taken of our wireless station which we have set up within the last five months. The outfit is complete in every detail and, with the exception of condenser and head set, none of the apparatus is factory built. We have had fine success with this outfit, being able to receive from New York and Chicago to New Orleans, and have sent 125 miles overland. The aerial used is of the four wire loop type. It is spread on 12 foot spreaders and is 300 feet long. The height at one end is 75 feet, and the other end is 60 feet high.

The receiving set consists of loose coupler, Murdock variable condenser, rotary variable, fixed condenser, fer-

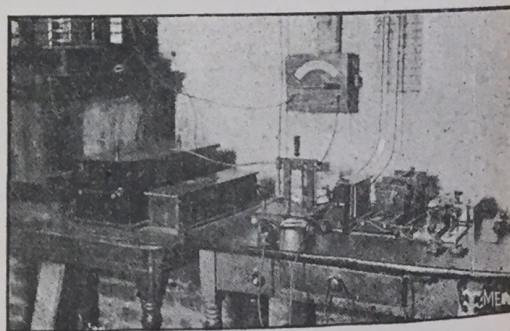

Templeton and Kamphausen Station.

ron and silicon detectors, and a 2,000 ohm head set.

The transmitting set is run from the city A.C. supply and includes the following apparatus: 1 kw. transformer, glass plate condenser of eight plates, 18 x 22 inches, helix, spark gap (inclosed in helix), hot wire ammeter, key and impedance. Since this picture was taken we have made a rotary spark gap and it certainly does the work. All the transmitting wiring is done with No. 10 stranded wire. We would be glad to hear from any stations at any time between 7 and 10 p. m. Station call—Z.A.
TEMPLETON & KAMPHAUSEN,
Ohio.


HONORABLE MENTION.

Herewith is a flashlight photo of my wireless telegraph station.

My sending outfit consists of two one inch coils, one E. I. coil, sending condenser, two keys, spark gap, and helix.

My receiving outfit consists of a tuning transformer, of which only half appears in the photo, two variable condensers, one single slide tuning coil, five detectors: silicon, galena, and electrolytic, one double throw receiving and sending switch, and one pair of 2,000 ohm E. I. phones.

I built all the instruments from the articles in the *Modern Electrics*, excepting the phones, keys, switch, and induction coil.

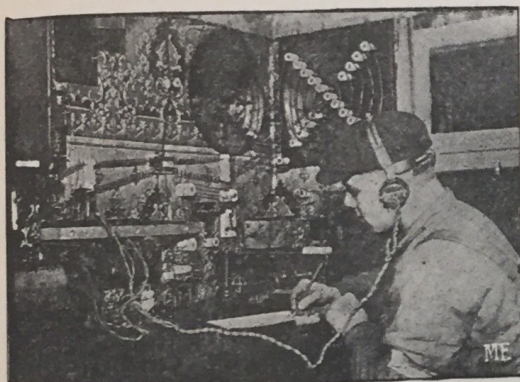

Kieffer Station.

My aerial consists of four strands of No. 16 copper wire, one and one-half feet apart, and one hundred feet long. The poles are seventy feet high.

With this outfit I have obtained excellent results.


ALBERT H. KIEFFER,
New York.

HONORABLE MENTION.

This is a picture of my wireless apparatus. The receiving set is as follows: Loose coupler with two sliders on the primary and one inside slider on secondary, one fixed condenser and one variable condenser, three detectors: E. I. Co. electrolytic, Murdock silicon and a galena. I have two sets of 2,000 ohm phones: Murdock and C. Brandes, and a buzzer test for detectors.

My sending set includes: E. I. Co. ½ k.w. transformer coil, electrolytic interrupter, one large Leyden jar and helix. The helix frame is of black walnut and it is wound with No. 8

aluminum wire. My key is a telegraph key and my spark gap is adjustable. My aerial consists of seven copper wires.

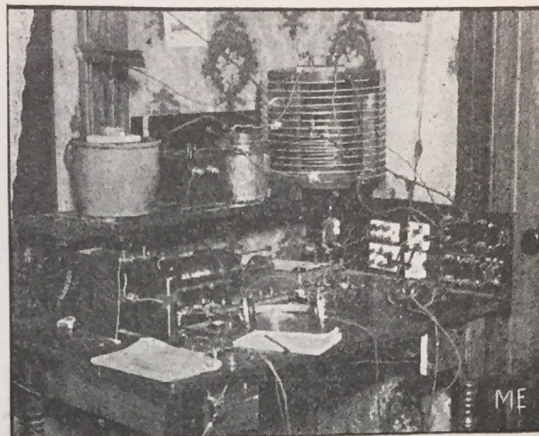


Garey Station.

With this set I have made proven tests of receiving over 2,000 miles. I hear the following almost every night: "M.C.C. (Cape Cod), "NAX" (Colon, Panama), "NAR" (Key West) "HA" (Cape Hatteras), "NY" (New York). I also hear all over the Great Lakes. I get very good results with this set.

LLOYD GAREY,
Michigan.

HONORABLE MENTION.

Here is a picture of my wireless outfit which consists of: a ½ kw. transformer, an electrolytic interrupter, and the electro sending helix. My aerial is 75 feet long, 60 feet high and consists of 8 strands of No. 12 bare copper wire. My receiving set consists of silicon and electrolytic detec-

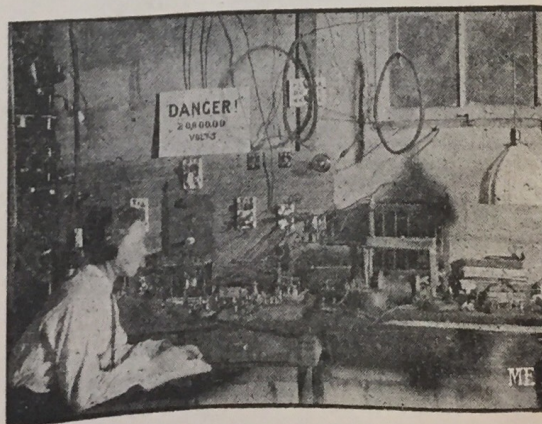


Granden Station.

tors, a fixed and a variable condenser, a double slide tuner and potentiometer.

HOWARD GRANDEN,
Nebraska.

HONORABLE MENTION.

This is a photo of my wireless station, nearly all of which was built by myself. I have an 80 foot pole with a 4 strand, copper wire antenna 200 feet long. My receiving set consists of the following: Perikon, pyron, galena, and silicon detectors, which are controlled by a 5 point switch, 3,000 ohm Western Electric phones, potentiometer, variable condenser, fixed condenser, and inductance, with double slide tuner. The detectors are mounted upon E. I. Co.'s bases which are very useful for this purpose. The apparatus is all made of quartered oak and mounted upon a quartered oak board with the necessary switches and binding posts.

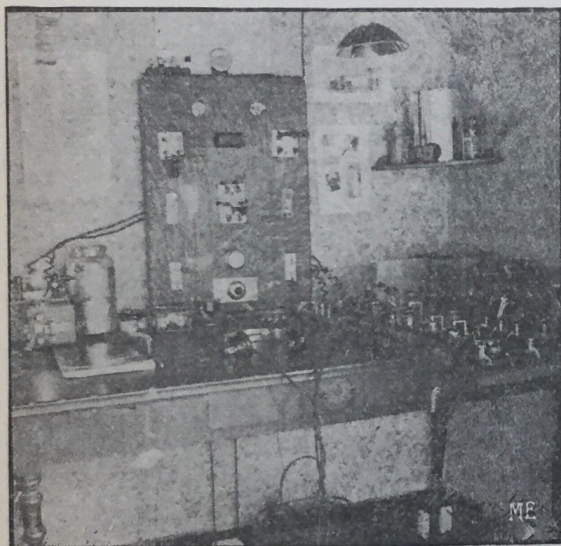

Ashley Station.

The sending set is made of the following: 1 inch spark coil, Mesco spark gap, Bunnell key, and 80 amp-hour National Storage battery. I am a constant reader of *Modern Electrics* and find it very helpful. My call is M.B.

JOHN ASHLEY,
Massachusetts.

MODEL AEROPLANE CONTESTS.

Flying contests for model aeroplanes are held every Sunday afternoon, weather permitting, at Van Cortlandt Park, under the auspices of the New York Model Aeroplane Club. Full particulars may be obtained from Mr. Edward Durant, c/o The Aeronautical Society, 250 West 54th Street, N. Y. City.

EDISON ON STATUS OF INVENTORS.

In a "New Year" interview printed in the New York Evening Journal, Mr. Thomas A. Edison said, in part:

"The worst thing about 1912 is the number of hoggish men it will have to tolerate—men, I mean, who are so greedy that they'll starve an inventor so hard he can't work. There is no end—absolutely no end—to the things 1912 could produce to make life easier and better and happier. But the inventors can't produce. They're starved down. The men that handle their inventions starve them. That's why the greedy men are the year's worst blight.


"What should we do this year? Jack up the man who produces—the man who works. That is, support the man and make his job easier. The men whose opinions of 1911 I thought best of were the men who can produce. Jack up that kind of man. That's the year's best message.

WIRELESS TRANSMISSION WITHOUT MASTS.


According to reports from Rome, Italy, Mr. William Marconi has discovered that wireless messages can be sent over desert land without the usual masts. Sand, being a non-conductor, acts as insulation for the wires which are laid on the ground in the direction in which the message is to be sent. Stations without masts can easily be established and maintained without becoming conspicuous to the enemy in time of war.—*Elec. World*.

AN ELECTRICAL FAKE.

A man has recently been making the rounds of Southern Indiana reaping a good harvest by selling an attachment to electric-light circuits which, he has represented, will give a saving of 25 per cent. on light bills when installed between the meter and the lights. He collects \$15 in advance. His so-called machine is an ordinary 4-in.-deep outlet or junction box with two wires passing straight through, the box being filled with ordinary cement.—*Elec. World*.

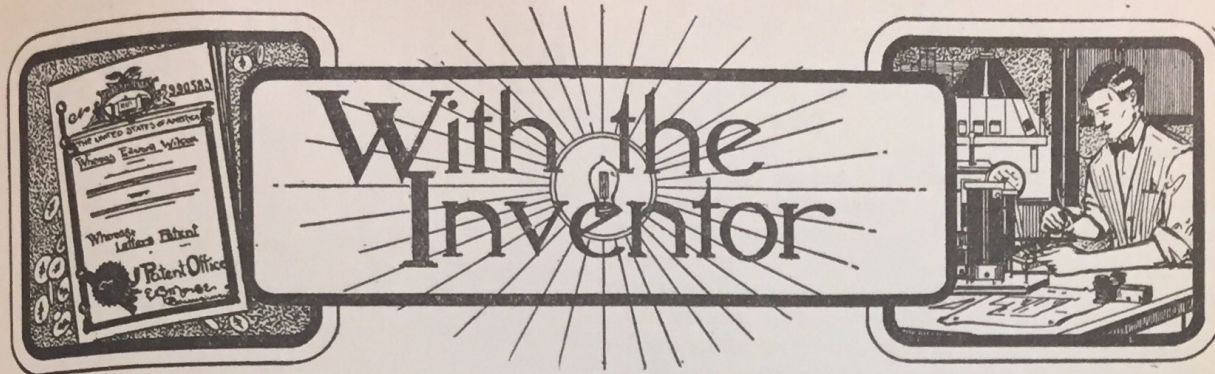

PATENT NO. 1,015,196 FOR TRANSMISSION OF ELECTRIC POWER HAS BEEN GRANTED TO THEODORE T. KRYSHSTOVICH, OF ST. LOUIS. This invention relates to transmission of electric power to airships. The inventor

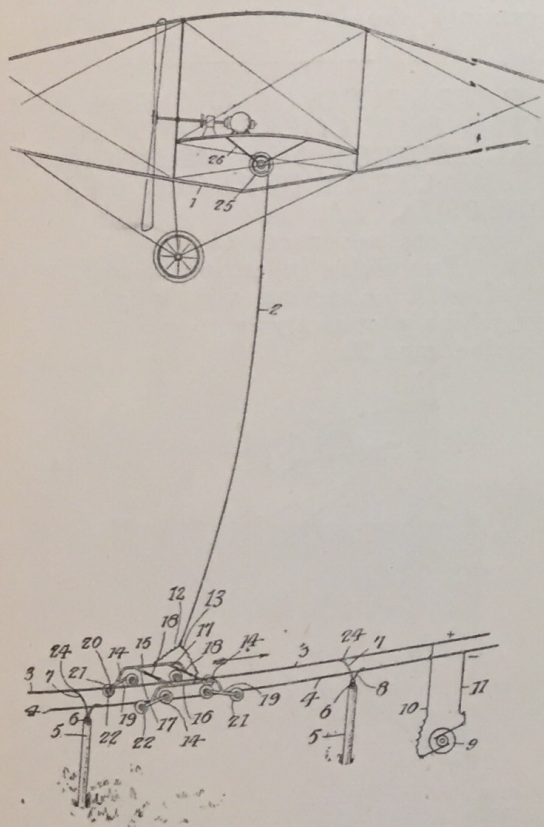

uses a double set of trolleys as shown, which are made to run from the electrical highway formed of the cables 3 and 4, to which power is furnished by generator 9. The power is thus transmitted to the cable 2 and acts on the electric motor of the airship.

We do not know whether the inventor has tried this arrangement, but we feel almost sure that when he does something will happen. Besides, we do not see what advantages the device has over an ordinary airship, unless Mr. Kryshstovovich thinks he can reduce the weight of his machine by doing away with the gasoline engine and equipments. This, however, does not make much difference as an aeroplane can just as well carry a few hundred pounds more or less without much trouble. There is certainly not any more safety in this aero-

plane than in any other and it surely is worse off than any other if the cable should become broken or if the power at 9 fails.


GEORGE SEIBT, OF BERLIN, GERMANY, HAS BEEN GRANTED PATENT NO. 1,012,456 FOR RADIO-TELEPHONY.

This well known authority on wireless secured the following patent on wireless telephony.

While Mr. Seibt's invention at the first glance, does not present anything novel, the theoretical points which he covers are well taken and although the patent is to-day more or less obsolete, inasmuch as it has been in the patent office since 1907, nevertheless, our readers interested in wireless telegraphy should secure a copy of this patent as quite some food for thought will be found in it.

Part of the specification reads as follows:

According to the present invention the variable resistance is brought into such relation to the fixed resistances that the variation of

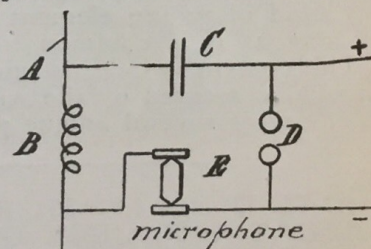

pressure produced by the acoustic vibrations causes a maximum variation of radiated electrical energy. In the case in which the oscillations are produced in the antenna itself or transferred to it by loose coupling from a closed oscillation-circuit, and assuming the microphone to be inserted directly into the oscillation circuit, theory shows that the resistance of the microphone ought to be numerically equal to the other resistances of the antenna, or in other words, that the damping produced by the microphone resistance ought to be the same as the damping produced by the resistance in the antenna itself.

The gist of this invention is to have the Ohmic resistance of the microphone the same as the resistance of the other parts of the system.

PATENT NO. 1,014,002 FOR APPARATUS FOR WIRELESS SIGNALING HAS BEEN GRANTED TO JOHN L. HOGAN, OF BRANT ROCK, MASS.

This invention deals with simplifying the

air and selling it to the unsuspecting consumer.


Perhaps this invention is a little premature and there may be some use for it for our future generations.

FREDERICK G. SARGENT, OF WESTFORD, MASS., HAS BEEN GRANTED PATENT NO. 1,013,223 FOR A DETECTOR.

Here is something very new in a wire-less detector. Mr. Sargent uses a resilient conductor 15 of iron or steel, and preferably in the form of a flat wire. It is made of this material so as to have a capability of keeping a slight amount of residual magnetism.

Careful adjustment can be made by means of screws 13, 18 and 26. No exterior magnetic field is used.

Mr Sargent claims that when electromagnetic waves strike the wire 15 this is

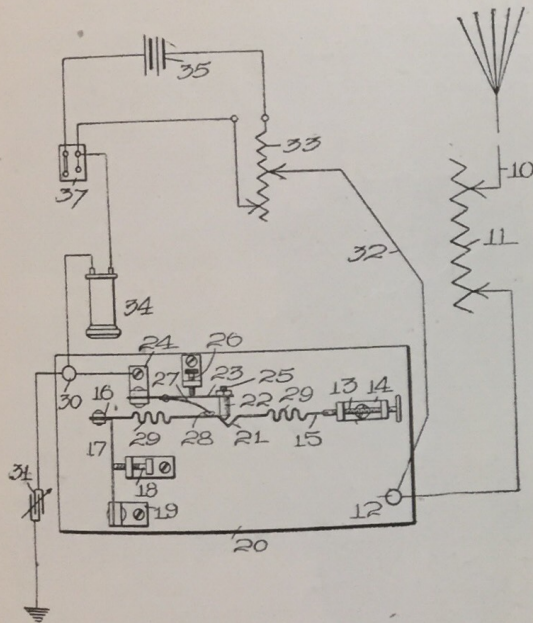

made to vibrate longitudinally, thus contacting with the part 22 which has a conical point and engages with the off-set portion 21 of the conductor 15.


The detecting contact member 22 may be made of carbon, carborundum, zincite, steel, iron, silicon, or other material. While in the illustration is shown a battery and potentiometer, Mr. Sargent claims that his device is so sensitive that it does not require a battery at all.

PATENT NO. 1,012,913, FOR AUTOMATIC ELECTRICAL FIRE EXTINGUISHERS, HAS BEEN GRANTED TO STEPHEN B. PRIEST, OF WASHINGTON D. C.

This invention deals with automatic electrical fire extinguishers and presents some novel ideas.

If fire should break out near the valves 36, the fusible bar 41, will be made to melt and the bar 52 is made to fall down, acting on the line 47. The valve 34 is thus opened and is ready for action. At the same instant, however, the electromagnet


21, is operated which pulls the lever 18 up. This disengages the tank 1, which is pivoted at 3, and the tank is turned up-side-down immediately. The chemicals in the tank act

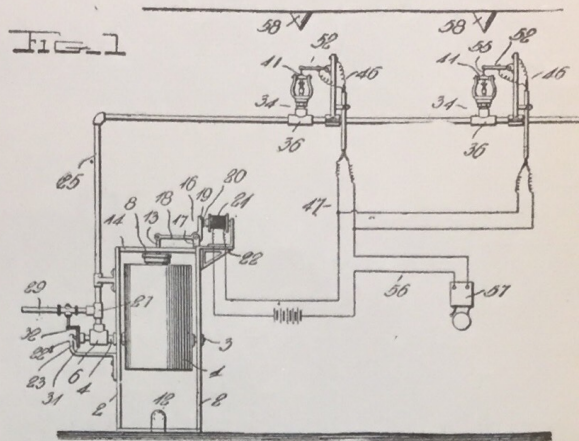

instantaneously and discharge through the tube 25, as shown in Fig. 2.

The chemicals under pressure are forced out through the tube 25, and rush out through the valve 36 extinguishing the fire that has started around that valve or near by. At the same moment, however, while the tank had revolved, it opened another valve 30, of the common water supply, which now also rushes through tube 25 after the pressure of the water has opened the valve 28. Thus if the chemicals of the fire extinguisher were not able to quite extinguish the fire, the water from the water-mains will follow up the work.

This invention is quite ingenious and several novel points have been covered. It has only one fault and that is, it seems to us a little complicated and has too many parts that seem to us liable of getting out

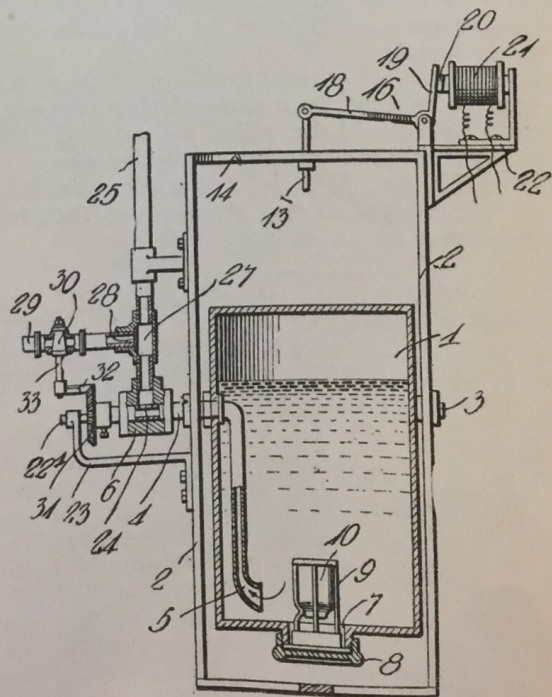

of order. However, we have no doubt that the inventor will overcome these defects without much trouble.

PATENT NO. 1,013,465, HAS BEEN GRANTED EDWARD VAN WAGENEN, OF NEW YORK, N. Y., FOR A BATTERY-CHARGE INDICATOR.

This invention deals with an indicator for storage batteries, and has some very novel points.

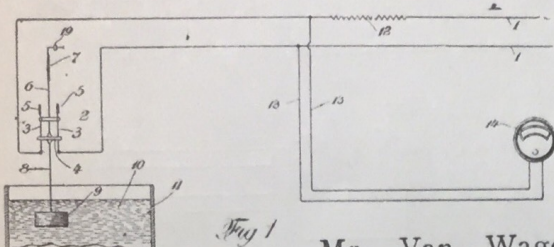


Fig. 1

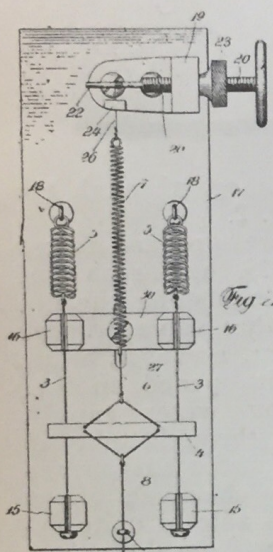


Fig. 2


Mr. Van Wagenen uses a hydrometer 9, which floats in the solution of the storage battery electrolyte 10. As the battery is charged the hydrometer 9 rises, and moves up the rod 8, which is held by a spring 7. The rod 8 also moves a metal connection piece 4, which slides on the resistance wires 3, 3. Thus any variation of the slider 4 will naturally make a difference in potential and this difference will be recorded in the recording voltmeter 14. Inasmuch as this voltmeter

traces a complete record for each hour of the day, one can easily ascertain just how smoothly the charge of the storage battery proceeded.

Mr. Van Wagenen uses his indicator mostly to show the condition of a battery at a distance. This point his invention covers largely.

Looking over this invention it has occurred to us that by means of this arrangement one should be able to cut off the charging current automatically at the end of the charge. We do not know whether Mr. Van Wagenen has thought of this but it occurred to us as very feasible.

MR. IRVING S. ROSENBLATT, OF SAN FRANCISCO, CAL., HAS BEEN GRANTED PATENT NO. 1,012,919, FOR AN ANTISEPTIC TELEPHONE MOUTHPIECE.



This shows another antiseptic telephone mouthpiece, and is one of those inventions that should better not be made. The proof of it is that no inventor has ever made any money out of an antiseptic telephone mouthpiece. It seems to us that the ordinary glass mouthpiece as used now, is about the ideal thing inasmuch as it shows

the dirt and dust very prominently and can be washed off with but little trouble.

The antiseptic idea has long been given up as nobody was ever able to prove that anyone ever was infected from a telephone mouthpiece.

Mr. Rosenblatt in his specification says that the absorbent material which he uses in his mouthpiece, may be saturated from time to time with suitable antiseptic, and he advises the use of cotton as an absorbent.

Has Mr. Rosenblatt ever tried to use his telephone mouthpiece with cotton, saturated with antiseptic on a long distance line? We think he will find that the other party will hardly be able to understand him.

Cotton happens to be one of the best sound insulators and for this reason it should not be used. Any other loosely packed material in a telephone mouthpiece acts in the same manner.

MR. WM. GEORGE ASMUS, OF CLEVELAND, OHIO, HAS BEEN GRANTED PATENT NO. 1,015,119 FOR THERMOSTATIC CIRCUIT CLOSER.

This invention

is another thermostatic arrangement and while it does not present anything absolutely new, its form is well gotten up and it will surely find its way into the market as it is useful, neat and compact.

The apparatus can be screwed into an ordinary Edison socket, making it very handy to use, at the same time taking up very little room.

Mr. Asmus






thinks that he can even use the sockets of broken lamp brackets for the construction of his thermostat.

The conical ring 20 is made of fusible material preferably soft solder, while 4 is the metal enclosure. The wires 14 and 15 normally do not make contact. As soon as sufficient heat is directed against the apparatus, the ring 20 will melt and the solder will fall down, thereby short circuiting the wires 14 and 15 which operate the necessary devices.

Considerable interest has been centered on the report of Mr. John Ericson, city engineer of Chicago, relative to the electrolysis of underground cables and pipes. Gas and water pipes were found to be affected most. On one particular 36 inch water main, the pits due to electrolysis were $\frac{1}{4}$ inch or more deep. In one case it was found that 30 amp. was flowing in a 24 inch water-main, and in other, 143 amp. in a 36 inch water-main.

Flying Sparks

THE SLY FOX.

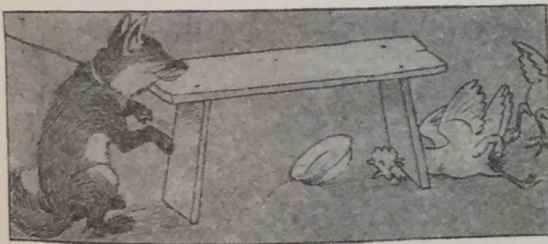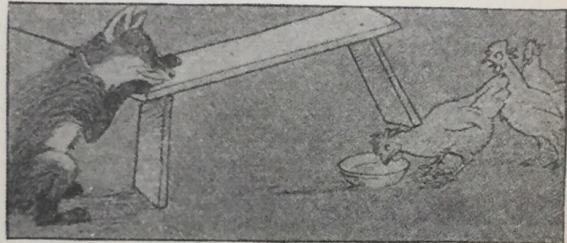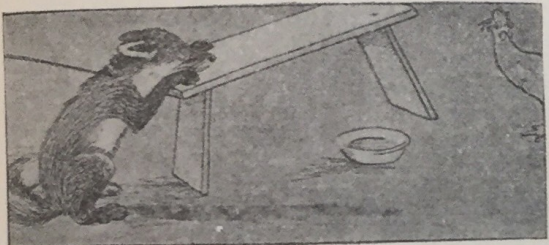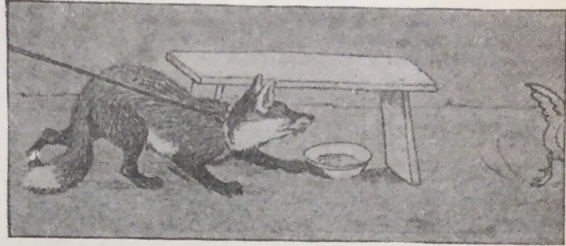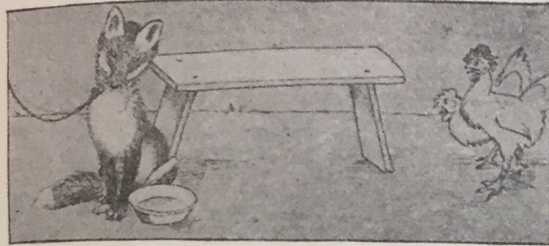

A foxy story without words.


—Meggendorfer Blaetter.

AUTOMOBILING IN AFRICA



And how to catch autos.

—Fliegende Blaetter

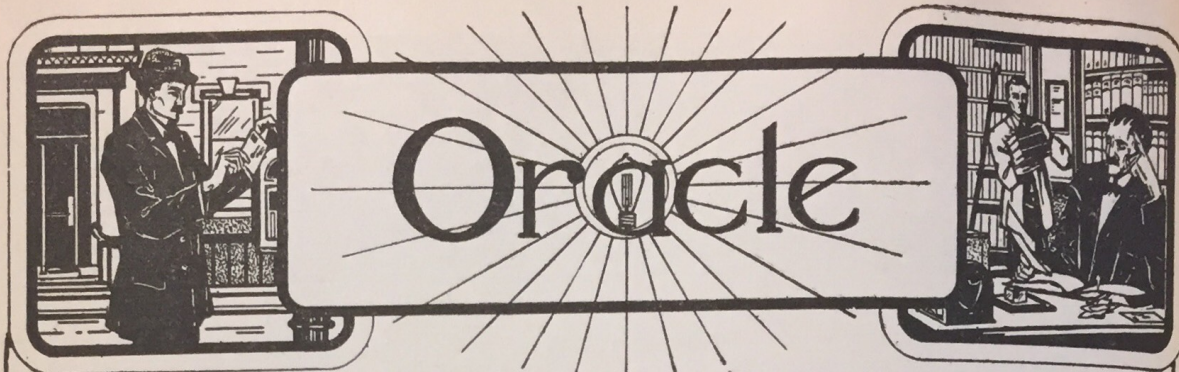

Queries and questions pertaining to the electrical arts, addressed to this department, will be published free of charge. Only answers to inquiries of general interest will be published here for the benefit of all readers.

On account of the large amount of inquiries received, it may not be possible to print all the answers in any one issue, as each has to take its turn. Correspondents should bear this in mind when writing.

Common questions will be promptly answered by mail if 10 cents to cover expenses have been enclosed. We can no longer undertake to furnish information by mail free of charge as in the past. There are as many as 150 letters a day now and it would be ruinous for us to continue acting as a free correspondence school.

If a quick reply is wanted by mail, a charge of 15 cents is made for each question. Special information requiring a large amount of calculation and labor cannot be furnished without remuneration. THE ORACLE has no fixed rate for such work, but will inform the correspondent promptly as to the charges involved.


NAME AND ADDRESS MUST ALWAYS BE GIVEN IN ALL LETTERS. WHEN WRITING ONLY ONE SIDE OF QUESTION SHEET MUST BE USED; DIAGRAMS AND DRAWINGS MUST INVARIABLY BE ON A SEPARATE SHEET. NOT MORE THAN THREE QUESTIONS MUST BE ASKED, NOR SHALL THE ORACLE ANSWER MORE THAN THIS NUMBER. NO ATTENTION PAID TO LETTERS NOT OBSERVING ABOVE RULES.

If you want anything electrical and don't know where to get it, THE ORACLE will give you such information free.

ELECTRIC SWITCH.

(1920.) Walter Belstad, Washington, asks how an electric switch works.

A. Wiring diagram of one form of electric track switch is given below. A and B are two metal strips insulated from the trolley, but installed so that the trolley wheel will touch both of them. When a car approaches the switch and the motorman wishes to go straight ahead he allows the car to coast while passing under the contact pieces A and B. When the wheel connects A and B, current passes from the trolley through solenoid C to contact A, through wheel to B, thence through resistance R, the lower contacts on which disc D rests, disc D, and solenoid F, to ground. This moves the plunger G to the left and sets the switch for the straight track. Should the motorman wish to take the curve he leaves the power on while passing under A and B. In this case the current drawn from A through the solenoid C is sufficient

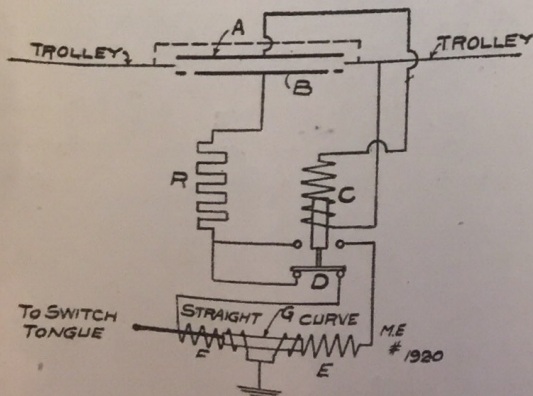

to raise its plunger and the disc D into connection with the upper contacts. Current from B then flows through the resistance

R disc D and upper contacts, and solenoid E to ground, moving plunger G to right and setting switch for the curve.

There is another form, in which, if the motorman finds the switch correctly set for him he coasts under A and B, no matter which way he wishes to go; and leaves power on if the switch is set wrong. The mechanism of this type is similar to that described above.

ELECTRICAL BLASTING.

(1921.) Arthur Logan, Colo., asks:

Q. 1.—Kindly give a description of the operation of electric blasting.

A. 1.—Two methods are in use at present, one being the hot wire blasting, and the other, the electric spark blasting. The former consists of a very fine piece of iron wire or other high resistance metal wire, connected across two copper wires. This is mounted in a metal cap containing the fulminating mercury preparation, which is far more explosive than dynamite and is the material used in percussion caps of cartridges. The current is supplied by an "exploder" which consists of a box containing a magneto which is driven by a plunger. The handle is given a rapid downward push, which makes contact and allows the current from the magneto to pass over the two wires to the hot wire fuse in the blasting hole. The red-hot wire causes the fulminate of mercury to explode with terrific violence which in turn explodes the surrounding dynamite charge by concussion. The other method consists of a small spark gap enclosed in a similar manner as the previous system. This gap is supplied from a small spark coil with the current. It is not as practical as the former method which is being used universally at present.

Q. 2.—Is it practical to refine gold by means of the electric current?

A. 2.—We presume that you mean by electro-chemical means. In the U. S. Assay office in New York there is an interesting exhibit on the refining of gold by means of electro-plating. The gold obtained is as pure as can be obtained by any known process. However, the expense of this method makes it prohibitive to use except where cheap water power which may be converted into electricity is at hand. The usual method of treating the slag with heat is still the best method and most economical known, for commercial work.

INSULATORS IN GUY WIRES.

(1922.) Clyde Hudson, Oregon, writes:

Q. 1.—Please explain why and how aerial guy wires should be insulated; and if they should be as well insulated for receiving only, as for sending.

A. 1.—Uninsulated guy wires absorb energy from the Hertzian waves, and detract from the amount received by your aerial. Breaking the guys up into short lengths by means of insulators prevents this to a great extent. Guys should be insulated whether aerial is for receiving or sending.

Q. 2.—How much farther can one receive by using two 1000 ohm receivers than with two pony 75 ohm single pole receivers?

A. 2.—You should be able to cover several times as great a distance with the better phones; but as explained before in this column the range depends on many other things besides the resistance of the receivers.

Q. 3.—How much farther can one receive with an aerial 70 feet high at both ends and 80 feet long, than with one 70 feet at one end and 50 feet at the other?

A. 3.—The first named aerial should work a little better than the other; but not much.

COMPARATIVE RESISTANCE OF COPPER AND HUMAN BODY.

(1923.) George Oswald, New York, writes:

There was a certain lady telephoning one evening and while she was doing this, I took a telephone receiver and placed one of the wires leading from the receiver to one of the posts of the lightning arrester and took the other wire and held it between my thumb and forefinger and then touched the other post of the arrester with one of my fingers of the same hand and I could hear almost as good as if I took the regular wire and touched the arrester with it. How much of a better conductor of electricity is copper than the human body?

A. The explanation of this is that the resistance between two fingers of the same hand is only a few hundred ohms and made little difference in the loudness of the words heard in the receiver. The resistance between a finger on one hand and the corresponding finger on the other hand is about 5000 ohms, while the resistance of a similar

THE BABY ENGINE



The Smallest 1/2 H. P. Gasoline Engine in the World

2 CYCLE—3 PORT, VALVELESS, WITH BUT THREE MOVING PARTS, AUTOMATIC LUBRICATION AND SPARK CONTROL.

Equipment includes engine, aluminum propeller, tank, carburetor, commutator, spark plug, Baby coil (5 oz.) box type, polished mahogany, set of miniature dry cells with instruction sheet for installation and operation, **complete and ready to run.** Weight, 4 lbs. 10 oz.

Price **\$35.00**

Complete set of blue-prints, giving details and dimensions for construction of an exact duplicate of the 7 1/2-foot

BABY MONOPLANE

which, equipped with one of the above (type "1-A") engines, recently flew, at a speed of 25 miles an hour, a distance of **one-half mile in a straightaway, uncontrolled flight.** Price **\$2.00**

Material for constructing the above Baby Monoplane as follows: Seasoned wood for sheets, fuselage and plane cross-braces; seasoned wood ribs, steam bent to correct camber, sheet metal for sockets and anchorage, piano wire for guying and cross-bracing, steel and aluminum tubing for landing gear, together with all necessary screws, bolts, nuts, nails, etc., etc. Complete (including set of blue-print drawings). Price **\$5.00**

The Baby Engine Company
STAMFORD, CONN.

BIG BARGAIN IN TELEPHONES



WE bought several hundred of this style from a bankrupt concern. These apparatus, 11 in. long, 5 in. wide, sold regularly at \$6.50. We can sell this job lot, each complete with transmitter, receiver and bell, at \$1.24; complete with induction coil for long distance, \$1.49. Telephone receivers, about 100 ohms, for long distance, 43c., delivered to your address. Extra large wall telephones, complete with receiver, transmitter, bell, \$2.75; same with two magnet magneto, \$3.65, while they last.

COSMOS ELECTRIC CO.

136-M Liberty St. New York

WE HAVE

Detectors, Tuning Coils, Receivers, in fact everything that the Amateur wants. Let us know your needs, and get the best the market affords without paying exorbitant prices.


GLENN SABIN & CO.,

29 South East St.,

Amherst, Mass.

Wanted—A man or woman to act as our information reporter. All or spare time. No experience necessary. \$50 to \$300 per month. Nothing to sell. Send stamp for particulars. **SALES ASSOCIATION,**
948 Association Building, Indianapolis, Ind.

**TELEGRAPHY TAUGHT
IN THE SHORTEST
POSSIBLE TIME**

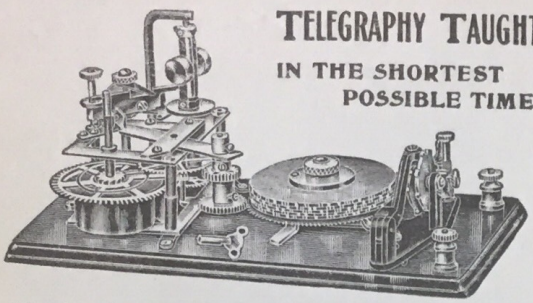

The Omnigraph Automatic Transmitter combined with standard key and sounder. Sends your telegraph messages at any speed just as an expert operator would. Five styles \$2 up. Circular free.

Omnigraph Mfg. Co., 39½ Cortlandt St., New York

BARRETT'S WIRELESS SCHOOL

344 E. 152d ST., NEW YORK

The best equipped wireless school in New York City teaching both codes and an electrical course, preparing the student for the Government test. Come in and see us.

DAY AND EVENING CLASSES.

AGENTS! BIG PROFITS

SELL BRANDT'S Newly Patented **AUTOMATIC RAZOR STROPPER**. The invention that puts a perfect edge on any razor in 20 seconds. Works automatically. For OLD style razors or **SAFETY** Blades. Makes one blade last a year. Any one can use it. Guaranteed for life.



Sharpens and Keeps Sharp Any Razor in the World, OLD style or **SAFETY**

Harry Bartow sold 40 stroppers in 18 hrs. 15 min. You can do as well. No selling experience needed. It sells itself. Every man wants one. Be the first in your locality. Write for prices, terms and territory. Be quick.

B. T. BRANDT CUTLERY CO., 84 West Broadway, New York City

Big Stamp Album 10c.



8x5½ inches: 546 spaces. 160 pictures, heavy covers. Bargain. Other Albums 30c to \$55 00. Send for list and copy Monthly paper FREE. SCOTT'S CATALOGUE, 800 pages, paper covers, 60c. cloth 75c. 108 all different STAMPS, Paraguay, Turkey, Victoria, etc., only 10c. 17 different UNUSED Nicaragua, Cuba, Salvador, etc., 10c. Approval sheets 50 per cent. commission.

SCOTT STAMP & COIN CO.

127 Madison Avenue,

New York

LET US GET ACQUAINTED.
25 STAMPS FREE to all sending for my price list.

5 Canal Zone	5c
5 Panama	5c
10 Cuba and Porto Rico.....	5c
10 U. S. Colombia	5c
Illustrated Album bound in heavy cover.	
108 good stamps, 1,000 hinges and perforation	
gauge. 25c. Post free.	

107 E. Ninth St., H. LEONARD,
Jacksonville, Fla.

length of No. 40 B. & S. copper wire is only 5 or 6 ohms.

SENDING CONDENSER.

(1924.) Lester E. Lighton, Pennsylvania, asks:

Q. 1.—How many square inches of tin-foil are needed in Leyden jars for a ¼ K.W. transformer? Does this foil have to be on a certain number of jars?

A. 1.—This will depend on the thickness of the jars, the secondary voltage of the transformer, the length of the spark gap, and the number of sparks per second. For 60 cycle operation, about 1440 square inches of glass should be covered on both sides. This is for two jars in series. As these jars will be rather large the condenser may be divided into sets of smaller jars connected in series multiple. (Two groups in series.)


Q. 2.—How may I tell if my head phones are wound to 1000 ohms? The number of ohms is not stamped on them.

A. 2.—The only sure method is to measure the resistance with a wheatstone bridge. A rough test may be made by connecting them in series with a set of phones known to be of 1000 ohms resistance. If the sound in each set is equally loud the two sets will have about the same resistance.

Q. 3.—What is the difference between the type E transformer and other transformers advertised for \$40 and \$50 per K.W.? Can you give me a diagram of their construction?

A. 3.—The difference lies chiefly in the iron core. In the type E transformer the core is of the shape shown below. The others are plain closed core transformers or else have odd shaped cores designed to give the characteristics of the type E.

TYPE "E"

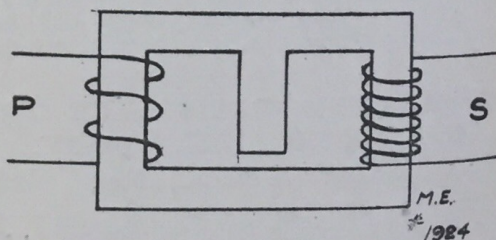

WAVE LENGTH FORMULA.

(1925.) Harold Sachs asks:

Q. 1.—How far can I receive with a single slide tuner, etc.?

A. 1.—Nix, Harold, we have given up guessing things like that. See notice in the August issue.

Q. 2.—What is the wave length of same station in meters?

A. 2.—We don't know. We cannot calculate it from the data given.

Q. 3.—What is the formula for finding same?

A. 3.—The wave length in meters, of any circuit containing inductance and capacity, in series, is $3 \times 10^8 \times \sqrt{LC}$ wherein L is the total inductance in henrys and C is the total capacity in farads.

OZONE.

(1926.) Raymond Stevens, Indiana, asks:
Q. 1.—What size fuses should be used with a 6 volt 60 ampere-hour storage battery?

A. 1.—Use 10 ampere fuses.


Q. 2.—How does "Ozone" generate from a spark?

A. 2.—Ordinarily, oxygen molecules are made up of 2 atoms each. Under the influence of a spark or a high potential brush discharge, the molecules break up and the atoms re-combine into molecules of 3 atoms each, these latter molecules being Ozone. Just why this happens, we don't know. There are very few who do know, we think.

RECEIVING HOOK-UP.

(1927.) C. Chester Stephen asks for a hook-up for the following: Loose coupler, tuning coil, fixed condenser, Murdock rotary variable, pair of 2000 ohm phones, 2 detectors, silicon and carborundum, and a 2 point switch.

This is the diagram:

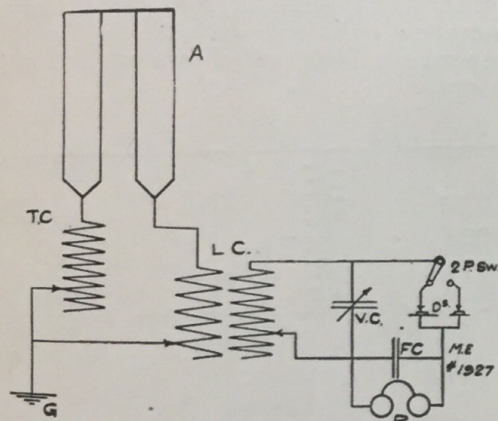

GLASS DETECTOR CUP.

(1928.) Robert F. Adams, Texas, asks:

Q. Where can I obtain a glass cup with a platinum wire fused in same, to be used for holding the electrolyte for an electrolytic detector, as I find a graphite-carbon cup very troublesome on account of the acid solution "sweating" through same.

A. We do not know where you may obtain it. Any good glass blower could make it for you or you might try cutting the lower part off a small pill vial and dipping a platinum wire into the solution in the cup so formed.

TRANSFORMER DATA.

(1929.) Lloyd Garey, Michigan, writes:

Q. 1.—Please give data for a ½ K.W. transformer, number of pies, etc.

A. 1.—Core: rectangle 7 inches by 14 inches O.D., cross section 1.4 inches square. Insulation on core: ¼ inch empire cloth. Primary winding: 480 turns No. 13 B. & S. D.C.C. in 4 layers (about 6 pounds). Secondary winding: 25 pies ¼ inch thick 2092 turns each No. 34 B. & S. D.C.C. (about 8 pounds).

Q. 2.—Can the Marconi station "M.C.C." vary the direction in sending?

A. 2.—Not in so far as we know.

Q. 3.—What is the solution used in an electrolytic detector?

A. 3.—Chemically pure nitric or sulphuric acid one part, distilled water 4 parts.

The Demand For Competent Men

in the Telegraph and Railway and Wireless Fields far exceeds the supply. We are unable to keep pace with the demand for our graduates. Greatest possibilities.

My Thorough Comprehensive Course of Instruction



Geo. M. Dodge, Pres.
Dodge's Institute of Telegraphy
Valparaiso, Ind.

enables my students to become proficient in a short time. I have the oldest, largest and best telegraph and railway instruction school in America. Established 1874. Thousands of my former students successfully employed everywhere. Railway and train dispatchers and Western Union Telegraph wires in classrooms. Complete high power wireless station, also an unexcelled course in railway accounting as applied to station agency work. ENROLL NOW.

Steady Work—Good Wages—A Bright Future

Expenses very low and may be earned while learning. Easy payments and many other big advantages. Large illustrated catalog tells all. FREE. Write for it now.

GEO. M. DODGE, Pres.

DODGE'S INSTITUTE OF TELEGRAPHY
Carmel Ave. VALPARAISO, IND.

LEARN WIRELESS

We have most modern up-to-date equipment and methods for teaching Wireless Telegraphy.

High Power commercial Wireless apparatus in class room in constant communication with ships and shore stations.

Expert Wireless instructors all licensed by U. S. Government.

We teach perfect sending and receiving in Morse and Continental.

Thorough instruction on apparatus and principles of Wireless.

Day and Evening sessions. Monthly rates. Students prepared for position with Wireless Companies. Send for booklet "A."

PHILADELPHIA
SCHOOL OF WIRELESS TELEGRAPHY
Skerrett Bldg., Ridge and Green St.,
Philadelphia, Pa.

WIRELESS EXPERIMENTERS

Our wireless catalogue contains diagrams and instructions which are of great value to the wireless experimenter. Inclose 2c. stamp for complete catalogue. We also send an aeroplane catalogue free. No postals answered.

Special for this Month

No. 18-22 Enameled Wire.....45c. per lb.
No. 24-28 Enameled Wire.....50c. per lb.

THE I. W. T. WIRELESS CO.

1040-A BROADWAY

BROOKLYN, N. Y.

INVESTING FOR PROFIT FREE
FOR SIX MONTHS

It is worth \$10 a copy to any man intending to invest any money, however small, who has invested money unprofitably, or who can save \$5 or more per month, but who hasn't learned the art of investing for profit. It demonstrates the real earning power of money, the knowledge financiers and bankers hide from the masses. It reveals the enormous profits bankers make and shows how to make the same profits. It explains how tremendous fortunes are made and why made; how \$1,000 grows to \$22,000. To introduce my magazine write me now. I'll send it six months absolutely FREE.

H. L. BARBER, Pub.

R. 487, 22 JACKSON BVD., CHICAGO ILL.

LEIMAN BROS.

BLOWERS VACUUM

PUMPS


for all Gas and Oil Appliances,
Sand Blasts, Boat Whistles,
Calliopes, Gas Producers, Gas
Boosting, Testing.

VACUUM CLEANING
Take up own wear. Small
Piston. Big Air Space. No
Springs. Powerful. Noise-
less. Can't get out of order.

Blower Catalog No. 138
Vacuum " No. 139

LEIMAN BROS. 62 AU John St.
NEW YORK

KENNEY PORTABLE NEEDLE SPRAY



Did you ever use
a Needle Spray for
bathing? Did you ever
feel that delightful
sensation imparted
by the thin streams
of water striking
against the body? It
awakens the mind
and stimulates the
muscles. Here is an
opportunity to get
one. Far superior to
bathing in the Tub
or standing under a
Down Shower. No curtain used. Water does
not splash on the floor. Fits any tub. Nothing
to equal it. Sent C. O. D. or upon receipt of
\$5.00. Send for booklet. AGENTS.


THE KENNEY SPECIALTY CO.
314 Madison Avenue New York

"Red Devil" Grip
Grips the Cable and Holds it
(Same makers as "Red Devil" Glass Cutters.)

Two styles. Regular and insulated with or with-
out pulleys.
8 sizes for all standard wires and cables. If
your local dealer can't we will furnish catalogue,
prices or the tool direct to you

Smith & Hemenway Co.
CHAMBERS ST NEW YORK CITY
No. 571. Your Price \$2.50.

**EXPANSION AND
TOGGLE BOLTS**



Just what you need for making
fastenings to brick and terra cotta
walls, etc. Try the kind that have
stood the test for years. Used by U. S. Government
in all Army and Navy work.

WRITE TO-DAY for Free Samples and Catalogue M

STEWART & ROMAINE MFG. CO.
124 No. 6th Street, PHILADELPHIA, PA.
(Oldest and largest manufacturers of expansion bolts
in the world.)

When writing, please mention "Modern Electrics."

RHEOSTAT MATERIAL.

(1930.) Jay J. Jackowski, Kansas, asks:
Q. 1.—What is used for resistance in a
regular switchboard rheostat. I took one
apart and it looks like carbon. Where can I
get material for making a rheostat (no
liquids).


A. 1.—Usually some form of resistance
wire or tape is used. German silver makes
a good rheostat and can be bought at al-
most any electrical supply house.

Q. 2.—Please tell me in what issue there
was a rectifier and directions how to make
one. I want a rectifier to change 110 volts
A.C. to D.C. It must carry about 5 am-
peres.

A. 2.—In the January, 1911, issue you
will find such a rectifier described on page
582.


Q. 3.—I wish to telephone and telegraph
over a wire at the same time. Is there a
way that I could do both and not have ne
interfere with the other?

A. 3.—Yes, it can be done. Try this
scheme. The sizes of the condensers and
inductance coils will have to be found by
experiment. Diagram shows one end of the
line only.

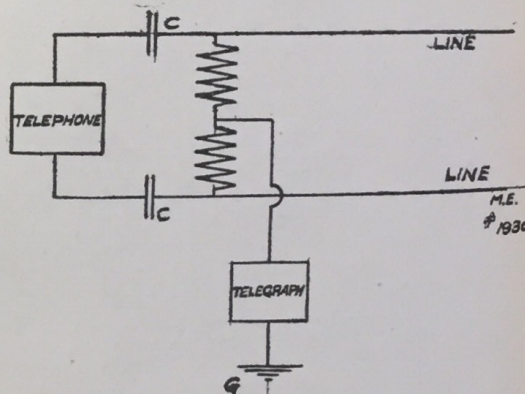

THREE PHASE GENERATOR.

(1931.) A. R. Coleman, Virginia, writes:
Q. 1.—If a three phase dynamo had its
field wound as shown would it pick up when
the resistance of the rheostat was cut out
entirely?

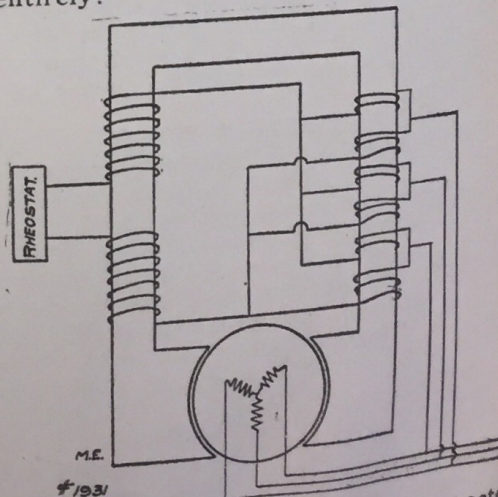

A. 1.—No. A generator so connected
would not excite its own fields, for the rea-
son that the algebraic sum of the voltages
in the three phases of a three phase circuit

is always zero. Hence there would no current to excite the fields.

Q. 2.—I am located on the west side of a high hill. Close to my house are two pine trees about 50 feet apart their base above my desk, will carry an aerial about 40 feet high. I want a loose coupled receiving apparatus strong enough to pick up wireless stations at Washington and ships in Chesapeake Bay. I am a Morse code operator on Ry. What code must I learn and about what will receiving set cost?


A. 2.—Your Morse will suffice for most stations and ships in your vicinity. The government stations usually use Continental, which is very similar to Morse. A good receiving set should cost about \$25.

HOOK-UP AND TUNER DATA.

(1932.) Richard Brooke, Missouri, writes:

Q. 1.—Please give hook-up for the following wireless instruments: Single slide loose coupler, silicon detector, junior fixed condenser, head phones, antenna switch, 1 inch spark coil, condensers for primary and secondary, helix, spark gap and key?

A. 1.—Here is your hook-up.

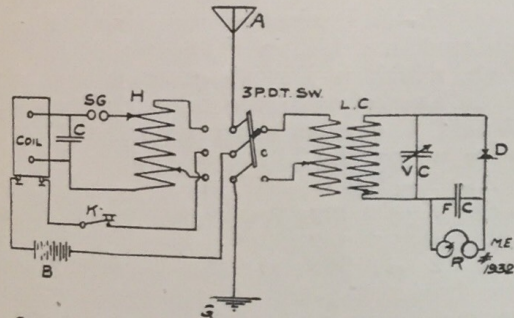


Q. 2.—Please give dimensions and size of wire for a small tuning coil.

A. 2.—Core 3 inches diameter, 6 inches long. Winding 1 layer No. 22 or No. 24 enameled wire.

MAGNETIC FREAK.

(1933.) Otto Atchison, California, says: Some time ago, while experimenting with electro-magnets I noticed, upon opening the circuit through a certain electro-magnet and a set of dry cells, that a spark could be seen to jump from the core of the magnet to any metallic conductor, which was brought close to the core. I think that the reason for this is that I had just the right combination of resistance and inductance in my circuit. The current which accompanied the spark was sufficient to affect a sensitive telephone receiver.

Maybe you are right Otto, this is too much for us.

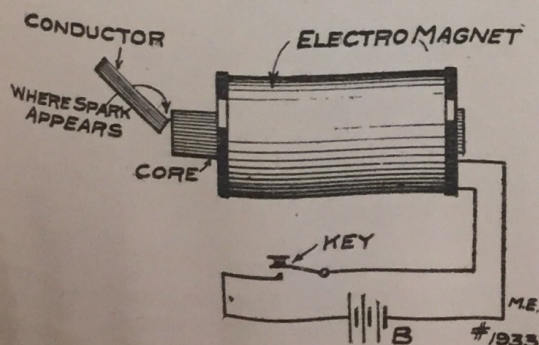

THE "W=M" TRANSFORMER

CLOSED CORE

High Voltage, High Efficiency Type
Sold with a Two Years Guarantee

FEATURES:

Long and even spark.

Highest transmitting ability.

No regulative device needed.

No protective device needed.

Lowest current consumption.

½ K.W. \$20.00 1 K.W. \$40.00 2 K.W. \$80.00

THE "W-M" ½ K.W. TRANSMITTING SET
RANGE 50-100 MILES

"W-M." ½ K.W. transformer with variable glass plate condenser, special zinc self-cooled Gap, large mahogany commercial Helix and compound anchor Gap, ring type, mounted in a beautifully finished mahogany cabinet.

PRICE COMPLETE, \$40.00

Every instrument in this set designed to obtain the highest possible range. We do not charge for the name, although we do charge for the use of the very finest materials.

2c Stamp for Catalog. No postals.

WORTS-MCKISSON MANUFACTURING CO.
DEPT. M. TOLEDO, O.

When writing, please mention "Modern Electrics."

"Bwaenco" Introductory Inducements until Further Notice

"BWAENCO" Special Sending Helix, wound with 1-2 inch brass ribbon, double slide, four large binding posts. Size 11 1/4 x 7 x 5 1/2, \$2.50; "BWAENCO" Improved Adjustable Spark Gap, 35c; "BWAENCO" Variable Tubular Type Condenser—Best and Most Reliable, \$2.00; "BWAENCO" MINERAL BARGAINS "GALENA" IRON PYRITES, (FERRON) FRANKLINITE, PER OZ., 10c; "BWAENCO" MINERAL BARGAINS SILICON, CARBORUNDUM, BORNITE, PEROXIDE OF LEAD, PER OZ., 20c; "BWAENCO" MINERAL BARGAINS ZINCITE AND COPPER PYRITES (PERICON) PER SET, 35c; No. 24-28, Enameled Wire, per lb., 50c; No. 18-22 Enameled Wire, per lb., 40c; No. 8-14 Aluminum Wire, Helix or Aerial, per lb., 50c.

BROOKLYN WIRELESS & ELECTRICAL NOVELTY CO., Inc.

766 Broadway, Brooklyn, New York City

Send Stamp for BIG BARGAIN BULLETIN, NO. 112.

No postals answered

NOTE—TO THOSE WHO CAN CALL: WE WOULD SUGGEST AT LEAST ONE CALL AND THEREBY BE CONVINCED THAT WE ARE


"The Real Wireless Bargain House"
"BWAENCO" MARK OF MERIT

When writing, please mention "Modern Electrics."

THE M-F

LOOSE COUPLER

\$8.50

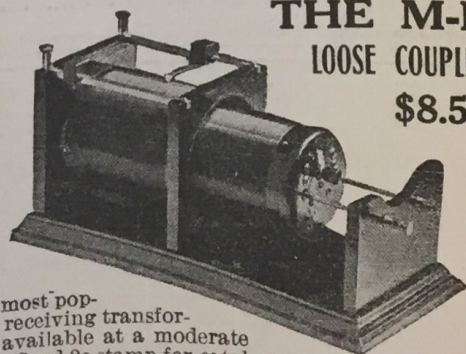

The most popular receiving transformer available at a moderate price. Send 2c stamp for catalogue.


THE MERKER-FLOCKER ELECTRIC CO.

957 Liberty Ave., Pittsburgh, Pa.

When writing, please mention "Modern Electrics."

Only 40 Cents

Anti-Nicotine Calabash Pipe



HERE'S my splendid Calabash Pipe, fashioned after the original African Calabash gourd, with handsome lines, German silver mountings, and my original Anti-Nicotine bowl which absorbs the nicotine and uses it to make the pipe color like the finest meerschaum.

"Get the Pleasure Without the Poison"

You don't have to "break-in" this pipe. Always clean, sweet; brings out the richest aroma of any tobacco. Worth three times this special price—40 cents.

Three for One Dollar to introduce them. Sent anywhere prepaid. Money back if not satisfied. Send for one or three today—and know the fullest pleasure of all-day-long pipe smoking.

H. MENGES, The Smoker's Friend
637 Menges Bldg., ST. LOUIS, MO.

New Rupture Cure

DON'T WEAR A TRUSS




Brooks' Appliance. New discovery. Wonderful. No obnoxious springs or pads. Automatic Air Cushions. Binds and draws the broken parts together as you would a broken limb. No salves. No lymphol. No lies. Durable, cheap. Sent on trial. Pat. Sept. 10, '01.

CATALOGUE FREE.


C. E. BROOKS,
71 State St., Marshall, Mich.

Learn Isometric Drawing



Easy to produce quickly read working plans. The Isograph makes an expert of a novice. Invaluable to inventors and designers. Handy for any draftsman, Celluloid 6x6 inches. Post paid 50c. with amply illustrated instructions, 2c stamps accepted. Send today.

THE ISOGRAPH COMPANY, -- 147 East 23d Street, New York City



If you require **Power and Speed** for any purpose, ask your dealer about the **Norton Improved Water Motor**, he can, or should be able to tell you all about them; if he cannot, we can.


Prices from **\$3.50** to **\$20.00**.

Catalogue sent on request.

NORTON WATER MOTOR CO., Inc.
Roslindale, Mass.

Men Wanted!

SOUND MEN—21 to 40 years old wanted at once for **Electric Railway Motormen and Conductors** in every state. Wages **\$60 to \$100 a Month**. Experience Unnecessary. Permanent employment, no strike. Write immediately for application blank. No colored men hired. Address **Manager Employment Department, Room 837, Dwight Building, Kansas City, Mo.**



I TEACH BY MAIL
WRITE FOR MY FREE BOOK
"How to Become a Good Penman"
and beautiful specimens. Your name elegantly written on a card if you enclose stamp. Write today. Address

F. W. TAMBLYN, 438 Meyer Bldg., Kansas City, Mo.
When writing, please mention "Modern Electrics."

PECULIAR PHENOMENON.

(1934.) W. J. Vincent, New York, writes:

One cold frosty morning this winter I noticed a peculiar phenomenon for which I cannot account nor have I been able to find anything on the matter. It was about 7.30 A. M., and the sun was just rising. Two telephone wires stretched across the street near my residence were vibrating quite rapidly, but, seeing no linemen at work on the line I thought it must be a peculiar optical illusion. On closer inspection, however, I found that they were actually vibrating with an up and down motion. I observed this strange action for several minutes, the wires continuing to oscillate with undiminished vigor. Perhaps some of your readers have observed a similar phenomenon and can offer an explanation.

Has anyone else noticed anything like this? We never have, nor can we explain it.

CHOICE OF AERIALS.

(1935.) Edward Eichstaedt, Connecticut, writes:

Q. 1.—My wireless receiving station is situated in a hollow. The aerial is 30 feet high, which is just about enough to bring it on a level with the hills on either side. Would I get better results if my station were up on the hill?

A. 1.—Yes.

Q. 2.—In my case is a slanting or horizontal aerial better.

A. 2.—If both are the same height use the horizontal, but if you can put up a higher slanting aerial than you can one of the horizontal type, the slanting one is preferable.

Q. 3.—Does the length of the lead in make any difference.

A. 3.—Yes. The length of the lead in affects the wave length of the aerial.

SINGING TELEPHONE.

(1936.) Jesse Rich, Illinois, asks:

Q. 1.—Do automobile concerns use a coil or transformer in the circuit when a dynamo is used to furnish light and power for spark, or do they use the voltage direct from the dynamo for light and spark?

A. 1.—Some use a coil and the jump spark; while others use a make and break spark without any coil.

Q. 2.—What makes a singing noise in a phone when the receiver is put in front of the transmitter?

A. 2.—When the receiver and transmitter are in this position, any sound that disturbs the diaphragm of the transmitter is communicated, electrically, to the receiver diaphragm, and the sound produced by the latter again jars the transmitter diaphragm. Each acts as a repeater to the other. Hence the singing noise, the pitch of which depends on the natural periods of vibration of the diaphragms, the electrical constants of the circuit, etc.

OPEN CORE TRANSFORMER.

(1937.) Arthur Harris, Missouri, wants data for a half K.W. open core transformer. Here you are Arthur: Core 11 inches

long by $1\frac{1}{4}$ inches diameter of soft iron wire. Primary winding 2 layers No. 14 D.C.C. wire. Secondary winding 26 pies $\frac{1}{4}$ inch thick, of No. 34 S.S.C. wire (about 8 pounds). Hard rubber tube $\frac{1}{4}$ inch thick separates primary and secondary windings. This transformer is for use on 110 volt 60 cycle current.

SPARK COIL DATA.

(1938.) Everett W. Davis, Illinois, asks:
Q. 1.—Will I obtain a 3 inch spark from the following coil, and if not how may I change things so that I will? Core $1\frac{1}{2}$ inches by 12 inches of soft iron. Primary of 2 layers of No. 16 D.C.C. wire and secondary 5 pounds of No. 30 S.C.C. wound in 20 sections $\frac{1}{4}$ inch thick with heavy fibre tubing 3-16 of an inch thick.

A. 1.—No. Core O.K. Primary No. 14. Secondary 8 pounds of No. 32 S.S.C. (30 per cent. more if S.C.C.). Tube $\frac{1}{4}$ inch thick.

Q. 2.—How should I connect the pies of this spark coil to obtain the best results?

A. 2.—Connect them all in series. Top to top and bottom to bottom.

Q. 3.—What sized primary condenser should be used with this spark coil?

A. 3.—180 sheets tinfoil 7 inches by 9 inches. Paraffined paper insulation.

WAVE LENGTH.

(1939.) Ralph Miller, Iowa, asks:

Q. 1.—Does wave length depend only upon the length of the aerial and the height above the instruments or does the distance between wires or any other factor help to determine wave length.

A. 1.—All these and still others affect the wave length.

Q. 2.—If two aerials are the same in height, length and in every other way, does a tuner make signals between these aerials more distinct?

A. 2.—Theoretically, no; but on account of differences in local conditions at the two aerials, a tuner would improve the operation. For a small tuner wind 1 layer of No. 22 or No. 24 enameled wire on a core 3 inches diameter by 7 inches long.

Q. 3.—Is it all right to use No. 8 iron wire to lead from the sending instruments to ground, or should copper wire be used when sending between stations less than a mile apart?


A. 3.—Iron might be good enough in this case, but copper would be much better.

A CORRECTION.

In No. 1077 it was stated, in answer to Mr. Edwin Meyer's inquiry, that three 3-terminal, automobile spark coils might be connected with their primaries and their secondaries both in series, and used for wireless work with an electrolytic interrupter.

Mr. Henry L. Hoepner calls our attention to the fact that no matter whether the primaries are connected in series or in parallel, two of the coils will always be short circuited.

We cheerfully acknowledge the mistake, and thank him for bringing it to our notice.

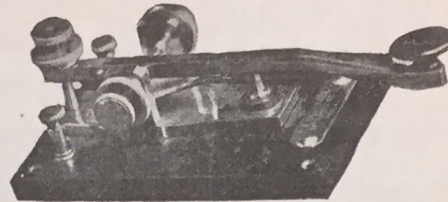

This Key especially good where heavy currents are to be broken. Is made of solid brass, all metal parts nickelplated. Has a curved spring which makes it work easier than any other Key. Points are of Special Alloy that will not stick and cause very little sparking. Hard Rubber Knob, Italian Marble Base $4 \times 6 \times \frac{3}{8}$ in. Price \$8.00. Send 2c. stamp for Catalog.

F. B. CHAMBERS & CO.

217 North Ninth St., Philadelphia, Pa.

SPECIAL BARGAIN IN WIRELESS PHONES

For a limited time we will sell our regular \$7.50 Professional Phones for \$4.50. These phones are wound to 2,000 ohms. Aluminum case, genuine hard rubber ear cap, highly polished nickel plated double adjustable head band, 6 foot green silk covered cord. This price is much lower than other houses charge for inferior phones of similar appearance.

O. T. LOUIS CO.,

59 Fifth Avenue, New York, N. Y.

PROTECT YOUR IDEA!

Patents That Pay

"MY TRADE-MARK"

"Your business will have my personal attention."—E. E. V.

\$ 378,140.00 \$
MADE BY MY CLIENTS

Proof Circular Mailed Free

**FREE: Instructive 112-page Guide
Book mailed upon request.**

REFERENCES

Lincoln National Bank..... Washington, D. C.
Little Giant Hay Press Co., Alma, Mich., and Dallas,
Texas
Electro Importing Co..... New York, N. Y.
American Railway Appliance Co..... Oil City, Pa.
Farmers' Mfg. Co..... Norfolk, Virginia
Griffin Mfg. Co..... New York, N. Y.
Warsaw Paper Box Co..... Warsaw, N. Y.
Butler Engineering Co..... Akron, Ohio
Garl Electric Co..... Akron, Ohio
Gray Lithograph Co..... New York, N. Y.

Expert-Prompt Services. Highest References.

E. E. VROOMAN

Registered Patent Attorney, Patent Litigation, Patent Lawyer

809 F St., N. W., WASH., D. C.
My offices are located across the street from the U. S. Patent Office.

When writing, please mention "Modern Electrics."

PATENTS

TRADEMARKS AND COPYRIGHTS

Secured or Fee Returned

Send model or sketch and description of your invention for free search of the U. S. Patent Office Records.

Our **FOUR BOOKS** mailed free to any address. Send for these books; the finest publications ever issued for free distribution.

HOW TO OBTAIN A PATENT. Our illustrated 80 page Guide Book is an invaluable book of reference for inventors and 100 mechanical movements illustrated and described.

FORTUNES IN PATENTS. Tells how to invent for profit and gives history of successful inventions.

WHAT TO INVENT. Contains a valuable list of inventions wanted and suggestions concerning profitable fields of invention. Also information regarding prizes offered for inventions, among which is a **Prize of One Million Dollars** offered for one invention and \$10,000 for others.

PATENTS THAT PAY. Contains fac-similes of unsolicited letters from our clients who have built up profitable enterprises founded upon patents procured by us. Also endorsements from prominent inventors, manufacturers, senators, congressmen, governors, etc. We advertise our clients' inventions free in a list of Sunday newspapers with two million circulation and in the *World's Progress*. Sample copy free.

Electrical Cases a Specialty. We have secured many important electrical patents.

Victor J. Evans & Co.

(Formerly Evans, Wilkins & Co.)

Victor Bldg., 724 9th St., N. W., WASHINGTON, D. C.


PATENTS

THAT PROTECT AND PAY

Books, Advice, Search and List of Inventions Wanted **FREE.** Send Sketch or Model for Search. Highest References. Best Results. Promptness Assured.

Watson E. Coleman, Patent Lawyer
622 F ST. N. W. WASHINGTON, D. C.

When writing, please mention "Modern Electrics."



PATENT YOUR IDEAS

\$8,500 offered for one invention.
Book "How to Obtain a Patent" and
"What to Invent" sent free. Send rough
sketch for free report as to patentability.
Patents advertised for sale at our ex-
pense in Manufacturers, Journals.
Patent Obtained or Fee Returned
CHANDLEE & CHANDLEE, Patent Att'ys
Established 16 Years
1052 F. Street, Washington, D. C.

SUCCESS IN INVENTION

is impossible without a strong and valid patent. Defective patents will not "pass" these days. An invention may be worth millions, but not a penny of profit can be actually derived from the same until after it is **PROPERLY PROTECTED** by patent.

Many paths lead to failure, but only one path leads to success. Why some inventors succeed where others fail is fully explained in my new book, "**PATENTS AND PATENT POSSIBILITIES.**" Also tells what to invent and where to sell it. This interesting booklet will be mailed to any inventor upon receipt of 6 cents in stamps to defray postage.

H. S. HILL, Patent Attorney,
520 McGill Building, Washington, D. C.

Advice on Patents

HYDROTHERMOMETER SYRINGE.

(14.) Mr. F. J. Suchanek, of New York, sends us a drawing of a new device which he calls the "HydrotHERMOMETER Syringe." He wishes to know if the idea is patentable.

A.—To our mind the idea is good and he should not have any trouble to secure a patent. There is a demand for such an instrument and while we cannot tell whether there will be a big demand, we think that there ought to be a good field in the storage battery business and perhaps also for owners of storage batteries.

TELEPHONE RECEIVER.

(15.) W. Scott Libbey, Jr., of Maine, writes:

"As I understand, the difficulty of making telephone receivers of two poles, lies in getting a large number of ampere turns, all turns well inside the flux of the magnet, and still have a sufficient low resistance. I enclose drawing herewith showing six magnets arranged in a circle and I would like to know whether such a device would be more sensitive and better than the ordinary two pole kind."

A.—We publish your idea for the reason that we do not think it practical. In fact, the same plan has been tried by Alexander Graham Bell a quarter of a century ago. The magnetic poles must always be as near the center of the telephone diaphragm as possible. As soon as you put the magnets near the edge of the diaphragm the action will be greatly reduced.

We advise you not to attempt to patent this, as even if you could get a patent, which is doubtful, the device would be useless.

WIRELESS TELEPHONE.

(16.) A. R. Coleman, of Virginia, writes: "Please advise if the method shown in sketch is a correct solution of your problem given on page 13, 'The Wireless Telephone,' second edition. Is the idea new, practical and patentable?"

A.—After carefully looking over your drawing we do not think that you have found the "Missing Link" as yet.

The idea which you show is practically nothing but a quenched spark gap connection, with some tuning coil, and we have no hesitancy in saying that the thing will not work. We do not think that it would do you any good to apply for a patent on this.

NEW SPARK COIL.

(17.) Edward Worth, of New York, writes:

"It is with some hesitancy that I seek your service in a matter which I think is out of your line. I hope you will not take it amiss if I ask your advice concerning an invention I have made. I am a reader of *Modern Electrics*. Briefly then: I have an important invention on the in-

duction coil. It is a radical departure in the construction of one of the coils essential parts. Because of the lack of place and means I have been unable to make exhaustive experimenting to place its true value. So far as I have gone I have got surprising results that warrant me in saying that it may be possible to increase the efficiency of the coil not a little. Besides the simplicity of its construction is a thing that might recommend its general use. Incidentally it gives a new and true explanation of the action of the induction coil. My purpose in writing you is to ask what I might do in the case—whom could I interest and what steps should I take. I will be much indebted to you for what advice you may give."

A. We would say that from your description we cannot tell whether the thing is any good or not. If you can give us any more particulars, we shall be pleased to go further into the matter and give you as honest advice as we can. We are sorry to inform you that we cannot give you any other advice, nor do we know where you could go with your invention before you have it patented, which would be a very poor idea anyway.

If you go to some manufacturer and explain to him, you always stand a chance that he will appropriate the idea himself and you will be the loser. You either will have to give us more information, or if you do not care to do so, you had better get in touch with a patent attorney.

SAFETY FASTENER.

(18.) Abner B. Shaw, of Massachusetts, has sent us a sketch and a sample of a new article of manufacture which is a safety fastener for scarf pins.

On account of the unique feature and the novelty of the device we do not wish to go further into the matter as we consider the idea too good to publish before it has been patented and we would advise Mr. Shaw to apply for patent on it by all means.

This is one of these little articles that will probably sell like wildfire, and can be manufactured for practically nothing, and can sell from anywhere from \$.02 to \$.10 apiece. If the article is made we would advise to make it out of phosphor bronze for the ones to sell at low price, and gold or silver material for the more expensive kind.

If such an article is marketed right and well advertised, it should prove a success.

ELECTRIC LIGHTER.

(19.) W. Neuman, of Newark, sends us a drawing of an electric watch lighter and after looking it over we find that there is absolutely nothing novel in this. In fact, a similar article is on the market now, made by a New York concern.

We would advise you not to apply for a patent on this particular article as you would probably not secure a patent on same.

RECTIFIER HOOK-UP.

(20.) A. R. Coleman, of Virginia, sends us a drawing and description of a hook-up to

Patents that PROTECT

Send 8 cents, stamps, for our new 128-page Book of Vital Interest to Inventors.

OUR references include inventors who have successfully negotiated patents obtained through us, in transactions with the largest Electric Companies in this Country.

R. S. & A. B. LACEY

Dept. XI, Barrister Building,

WASHINGTON, D. C.

Established 1869

PATENTS

No attorney's fee until patent is allowed.
Write for "Inventor's Guide."

FRANKLIN H. HOUGH,
Loan and Trust Bldg., Washington, D. C.

PATENTS C. L. PARKER

Patent Lawyer

8 McGill Bldg., Washington, D. C.

Patents, Trademarks, Copyrights, Patent Litigation

Handbook for Inventors. "Protecting, Exploiting and Selling Inventions" sent free upon request.

PATENTS SECURED

Write for Free Search Plan and contingent terms.

ELMER C. RICHARDSON, 37 Tremont Street, Boston
Associated with Washington Attorneys.

When writing, please mention "Modern Electrics."

HI-GRADE WIRELESS AND ELECTRICAL SPECIALTIES

You save money when buying your wireless instruments from us. The best and largest stock in the east at prices that will surprise you.

Send for Catalogue.

JOHN J. PARKE & CO.,
129 North 7th Street
PHILADELPHIA, PA.

Anglo Model Aeroplane Mfg.

561a WEST 147th STREET, NEW YORK CITY

	Ready Models	Knockdown
2 ft. Bleriot	- - - \$5.00	\$1.50
2 1/2 ft. Anglonette	- - - 7.00	
Knockdown 3-Ft. Model,	2.25	

This machine we positively guarantee to fly 800 to 1000 feet or money refunded

WE CARRY SUPPLIES

Model Aeroplanes & Accessories

We manufacture the highest grade of aeroplane models on the market. Every part is well made from the best of materials and in exact accordance with the designs submitted to us. We have on hand at all times stock models of all well-known machines. We carry a complete stock of accessories of all descriptions—miniature pneumatic wheels, ball-bearing shafts, turnbuckles, eyebolts, light model wood, Para rubber, wire, etc. Our simple and compound elastic motors are the most durable sold. Our prices are very reasonable. Send at once for our catalogue G, and see particularly our labor saving elastic motor winder.

Aero Mfg. & Accessories Co.
18 Dunham Place Brooklyn, N. Y.

MAIL US \$1

and we will send you prepaid one


of our Dart Monoplanes guaranteed to rise and fly from the ground. 30 inches long, 22-inch planes. Sold elsewhere for \$3.

Dart Model Co., 117 John St., N.Y.C.

RACING MONOPLANE

Will fly 1600 feet. Price, complete assembled, ready to fly, \$4.00.
Finished parts for making same machine, \$2.00
FOUR-FOOT KNOCK-DOWN BLERIOT MODEL \$2.00

MCCUTCHEN AERO CO.
2043 W. Tioga Street, PHILADELPHIA, PA.

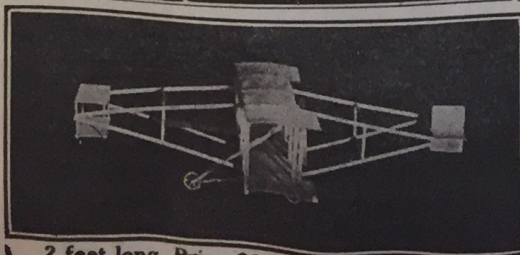

2 feet long. Price \$1.00. Five other models.

get constant voltage and variable direct current from an alternator or the alternating side of a rotary transformer.

Its purpose is: 1st—To charge storage batteries with an alternator driven by wind power.

2nd—To use the energy of electric automobiles and storage battery street cars when coasting to recharge their batteries instead of wasting it on the brakes.

Please advise if this idea is original, practical, valuable and patentable.

A. In answer to same we would say that the idea is not original, not practical nor valuable. We would say that you probably could get a patent on this, but have no hesitancy in saying that it probably would not be a success as far as the financial end goes.

GALENA DETECTOR.

(21.) W. H. Roberts, of San Francisco, writes:

"Enclosed you will find description of a galena detector. I have used it successfully and I find that it is almost as sensitive as an electrolytic detector. I would like to know if there is any detector like it on the market and if not, is it patentable? Can I sell it without getting a patent?"

A. We have carefully looked into the drawing and description, but failed to find anything novel or even original in same. This idea has been used dozens of times; in fact, very similar detectors have been described in *Modern Electrics* right along.

As far as patenting any detector of this kind goes, we would refer you to answer No. 12, page 731, January issue.

Will Mr. Rudolph Harris of whose wireless station a description appeared in the October, 1911, issue, please send in his correct address.

"The De Kalb Radio-Transmission Club," was formed on December 17th, 1911, for the purpose of promoting wireless telegraphy in De Kalb and vicinity. Applications for membership are open to all in a radius of ten miles from De Kalb, applications to be addressed to the president, Bayard Clark, Augusta avenue, De Kalb, Ill., or to the vice-president, Bruce Sundberg, 304 S. 4th street, De Kalb, Ill.

BOYS GET AN AEROPLANE

A miniature aeroplane will give you an unlimited amount of genuine pleasure. Not a useless toy but a carefully constructed and durable machine. Choice of six different models—Wright, Farman or Curtiss (see illustration) Biplanes and Bleriot, Antoinette or Demoiselle Monoplanes. Directions explain fully how to put aeroplane together. Each piece plainly marked with number to correspond with a detailed blue print. Express prepaid, securely packed, on receipt of \$1 (Bill or stamps). Be sure to state style desired.

PICELLER AEROPLANE CO.
276 Washington St. New York, N. Y.

\$1

BRANDES SUPERIOR RECEIVERS and HOT WIRE METERS




These receivers will beat any receivers you compare them with, at the same price, and better than some that cost twice as much.

If this don't prove true, you may return them, and your money will be refunded immediately.

Complete set, 2000 ohms as illustrated - \$5.00

Single receiver 1000 ohms - 1.60

Send for Illustrated Catalogue



\$5.00

Are you getting the maximum amount of energy into your aerial? Don't be deceived by the crashing spark. Our meter will solve this problem correctly. Send for pamphlet giving full description of our meters and their use.


For this high grade instrument. Guaranteed to indicate radiations from even 1 inch coil sets.

C. BRANDES Inc., 111-113 Broadway, New York

AGENTS FOR } SAN FRANCISCO—Ford King, No. 623 Balboa Bldg.
LOS ANGELES—C. E. Cook Electric Co., No. 745 So. Spring Street

NOTE.—In the Advertisement of C. Brandes, Inc., on page 733 of the January issue, the price of the Navy Receivers was shown as \$13.50. This was incorrect. The proper price is **\$13.00**—(Pubs.).

A SCHOOL WITHIN ITSELF



There are XX chapters in all, XIX carrying you from the fundamental principles of electricity on through the various branches to a point where the careful student comprehends the complete designing, care and operation of a dynamo or motor, and one chapter on electric automobiles, outlining their construction, care and operation, and all about storage batteries and how to handle them. Each subject is carefully written and to the point. After a student studies a subject, he is questioned on that subject in such a manner as to bring clearly to his mind the points he needs to know regarding same. The book contains a dictionary defining 1500 Electrical Words, enabling the reader to ascertain the meaning of any electrical word, term or phrase used in this book, as well as hundreds of others in common use. All required tables necessary in the study are in it.

\$2.00 PER COPY—SIXTH EDITION—30,000 COPIES SOLD. The offer we make of refunding money if book is

not satisfactory upon examination is AN UNUSUAL ONE in connection with the sale of a book. But we have no fear of its return. Your decision will be what thousands of others

have been. Money would not buy it if it could not be duplicated. We could print testimonials by the hundreds. It is best to order and be your own judge of its merits.

Armatures and Fields Wound—Commutators Filled.

CLEVELAND ARMATURE WORKS, Book Dept., 4732 St. Clair Ave., EAST CLEVELAND, OHIO

AMERICA'S GREATEST REPAIR WORKS

HOT WIRE AMMETER \$1.00

JUST WHAT YOU NEED FOR TUNING IN WIRELESS

Works perfectly. Not affected by temperature or jolts. Highly finished. Money refunded if not satisfactory.

IMPROVED ELECTROLYTIC DETECTOR with Wollaston wire \$1.00. 25c for 1 inch .0001 Wollaston wire. Raw Materials.

Stamp for list.

MAXWELL LOGAN, Woodbridge, N. J.
Formerly Logan Supply Co.


Matchless Pocket Lighter

Durable and water-proof with perfect ignition. Satisfaction guaranteed or money refunded.

Postpaid 35c., 4 for \$1.00.

Complete with pocket clip. Special proposition to agents & dealers

SCHILLER MFG. CO., Dept. M. E. 1, CHICAGO

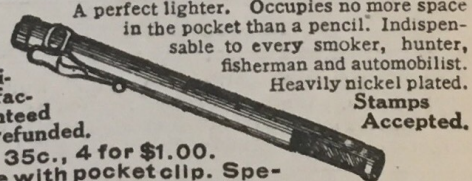

A perfect lighter. Occupies no more space in the pocket than a pencil. Indispensable to every smoker, hunter, fisherman and automobilist.

Heavily nickel plated.

Stamps Accepted.



HYPNOTISM

Would you possess that strange, mysterious power which charms and fascinates men and women, influences their thoughts, controls their desires, and makes you supreme master of every situation? Life is full of alluring possibilities for those who master the secrets of hypnotic influence; for those

who develop their magnetic powers. You can learn at home, cure diseases and bad habits without drugs, win the friendship and love of others, increase your income, gratify your ambitions, drive worry and trouble from your mind, improve your

memory, overcome domestic difficulties, give the most thrilling entertainment ever witnessed and develop a wonderfully magnetic will power that will enable you to overcome all obstacles to your success. You can hypnotize people instantaneously—quick as a flash—put yourself

or anyone else to sleep at any hour of the day or night—banish pain or suffering. Our free book tells you the secrets of this wonderful science. It explains exactly how you can use this power to better your condition in life. It is enthusiastically endorsed by ministers of the gospel, lawyers, doctors, business men and society women. It benefits everybody. It costs nothing. We give it away to advertise our institution. Write for it to-day.

NEW YORK INSTITUTE OF SCIENCE, Dept. 131-B Rochester, N. Y.

Classified Advertisements

Advertisements in this department 5 cents a word, no display or any kind. Payable in advance, by currency, check, money order or stamps. Count 7 words per line. Minimum, 4 lines.

5% discount for 3 insertions
10% discount for 6 insertions
15% discount for 9 insertions
20% discount for 12 insertions
within one year.

With 52,000 subscribers we have over 250,000 readers of MODERN ELECTRICS, which makes it one of the cheapest high grade classified mediums in the United States.

Advertisements for the March issue must be in our hands February 20th.

Modern Electrics,
233 Fulton St., New York.

Gentlemen:—While we are writing you we believe it fair to announce the results from the ad we inserted in your magazine. Although only a classified ad it has several times paid for itself, and we still receive returns from it. You will hear from us shortly, as we will insert a quarter-page ad, knowing that it will mean big returns for us, we remain,

KRAEMER WIRELESS DIRECTORY CO.
Charles M. Kraemer (Signed).

AERONAUTICS

COMPLETE PLAN drawn to scale with full instructions for building the only Wright 3-ft. Bi-plane Model that is absolutely guaranteed to fly. 25c postpaid.

Drawing and directions for three-foot model Blériot Monoplane, 15c. Stamp brings most complete, interesting and instructive illustrated catalog published. Ideal Aero Supply Co., 86-88 W. Broadway, New York, N. Y.* (1)

BARGAINS FOR MARCH—Rubber 1/16 inch, 2 feet for 1c; Ball Bearing Shafts, 20c each; Carved Propellers, 5c per inch; Wood up to 1/4 inch, 2 feet for 1c. Send 2c stamp for bargain catalogue. No postals answered. I. W. T. Aeroplane Co., 1044 Broadway, Brooklyn, N. Y.

AGENTS WANTED

BIG PROFITS selling "Vulcan" Fountain and Stylo Pens. Well advertised; quick sellers. Write for catalogue showing liberal discounts. Ullrich Co., Dept. 9, 135 Greenwich St., New York, N. Y.

AGENTS WANTED—Send 25 Cents Silver for one of our Spark Gas and Gas Stove Lighter and one of each of our catalogues with terms to Agents. A. S. Mankin & Co., Alexandria, Va.

AUTOMOBILES

AUTOMOBILES. Save dealer's profits, buy direct from the owners. I have all makes runabouts from \$50 up; touring cars from \$100. Don't purchase any car until you get my prices; all guaranteed for one year. M. E. King, Automobile Broker, 213-217 West 125th St., New York City. (1)*

BOOKS, BLUEPRINTS AND FORMULAS

3,000 RECIPES, FORMULAS, and Trade Secrets. 368 pages, 25c prepaid. Catalog on Mechanics, Engineering, Electricity, Trades, etc., free. Box 311. Scientific Book Shop, Syracuse, N. Y.

BOOKS, BLUEPRINTS AND FORMULAS

FREE—"How to Run and Install Gasoline Engines." Greatest little book ever published on this subject, sent free with year's subscription to Gas Energy. Learn how to solve all knotty Gas Engine problems in few moments. O. L. Stevens, Ind., writes, Gas Energy is best magazine published. Send 50c for year's subscription. Book free. Gas Energy, 30 Murray St., New York (1)

LATENT FORCES. How to use them, 120 pages, 25c. "Personal Magnetism," 146 pages, 30c. "How to Win Success," 352 pages, \$2.00. "Hypnotic Wonders" and catalog free. Modern Science Institute, 510 W. 69th St., Chicago.

STEEL TEMPERING BOOK for mechanics and Mechanical Digest one year, special offer 25 cents. Mechanical Digest, Grand Rapids, Mich.

LEARN TO METALIZE FLOWERS, INSECTS, etc.; also Resilvering Mirrors, both chemical formulas twenty-five cents. D. W. Cotton, 50 Hawthorne Avenue, Yonkers, N. Y.

FORMULAS FOR ANYTHING—Write for quotation on desired formula. Wm. Snyder, 121 N. Main St., Phillipsburg, N. J.

BUSINESS OPPORTUNITIES

FREE—"Investing for Profit" Magazine. Send me your name and I will mail you this magazine absolutely free. Before you invest a dollar anywhere get this magazine. It is worth \$10 a copy to any man who intends to invest \$5 or more per month. Tells how \$1,000 can grow to \$2,000. How to judge different classes of investments, the real power of your money. This magazine six months free if you write to-day. H. L. Barber, Publisher, R418, 20 W. Jackson Boulevard, Chicago. (1)

I'LL SHOW YOU how to start a profitable Mail Order business of your own, quickly, inexpensively and sensibly without any advance payment, if honest. Expert, P. O. Box 1615-M, New York City. (9)

YOUR AD PLACED in nearly fifty magazines 3 months, 5 cts. per word. A. S. Mankin & Co., Alexandria, Va.

ELECTRICAL APPARATUS

1000 GUARANTEED POCKET AMMETERS for testing batteries. Handsomely nickelplated. Each instrument in a chamois leather case, 25c postpaid. Stamps taken. Auto Repair Co., 521-23 West 144th St., New York.

FOR SALE

HAVE A 1/2 K. W. TRANSFORMER COIL, new, but displaced by transformer, price \$6.00; "Gernsback" Electrolytic Interrupter, \$2.00; 1 K. W. Helix, \$3.00; 1,000 meter, double slide tuning coil, \$3.50; arc lamp with rheostat, \$2.75; 6 volt, 4 amp., dynamo, \$3.00; receiving fixed condenser, 75 cents. George Cox, Cullowhee, N. C.

PIPE SMOKERS—Send 25 Cents Silver for one of our Nicotine Consumers, fits any pipe. A. S. Mankin & Co., Alexandria, Va.

FOR SALE—Sending Set. P. Schonefeld, 213 West 16th St., New York.

GAS CONSUMERS

SAVE 50c to \$5.00 ON YOUR GAS BILL every month with our Governor. A great invention. Write to-day for free circular. Specialty Supply Co., Desk E., Kewanee, Ill. (1)

HELP WANTED

WHY NOT PREPARE for Civil Service Examination? Teaching? Stenographer? Bookkeeper? Stationary Engineer? Electric Wiring? Electrical Engineer? Mechanical Engineer? Mechanical Draftsman? Electric Wiring? Matriculation, \$5. Tuition free. Mail course. Address Carnegie College, Rogers, Ohio. * (1)

ELECTRIC METERMEN wanted in every state—\$900-\$1,800 yearly. Rapid introduction of electricity creating new positions daily. We will fit you for a splendid position and assist you to get it. Booklet giving full particulars sent free. Write for it to-day. Fort Wayne Correspondence School, Dept. 50, Fort Wayne, Ind. (9)*

LOCAL REPRESENTATIVE WANTED. Splendid income assured right man to act as our representative after learning our business thoroughly by mail. Former experience unnecessary. All we require is honesty, ability, ambition and willingness to learn a lucrative business. No soliciting or traveling. This is an exceptional opportunity for a man in your section to get into a big paying business without capital and become independent for life. Write at once for full particulars. Address E. R. Marden, Pres. The National Cooperative Real Estate Company, L599 Marden Building, Washington, D. C.

FREE ILLUSTRATED BOOK tells about over 300,000 protected positions in U. S. service. More than 40,000 vacancies every year. There is a big chance here for you, sure and generous pay, lifetime employment. Easy to get. Just ask for booklet A947. No obligation. Earl Hopkins, Washington, D. C.

WE TRAIN DETECTIVES—YOU CAN BE ONE: many openings; earn \$100 to \$300 monthly; this fascinating profession taught practically and scientifically by mail; low cost. American School of Criminology, Dept. N., Detroit, Mich.

I WILL START YOU earning \$4 daily at home in spare time silvering mirrors; no capital; free instructive booklet, giving plans of operation. G. F. Redmond, Dept. A. G. Boston, Mass. (11)*

INSTRUCTION

AMERICA'S FINEST PENMAN teaches rapid, wireless business writing by mail. Small cost. Illustrated Journal free. Francis B. Courtney, Cedar Rapids, Iowa.

LEARN VENTRILOQUISM at home. Particulars for stamp. M. Bailey, Box 253, St. Paul, Minn. * (1)

MACHINERY AND TOOLS

FOOT AND ELECTRICAL and power engine lathes; hand and power planers, shapers and drill presses; the most modern; the most practical; various attachments; supplies. Shepard Lathe Co., 134 W. 2d St., Cincinnati, Ohio. (9)

MOTORCYCLES

MOTORCYCLES. Lowest prices, largest stock. Saves dealer's profits. Buy direct from the owners. I have all makes. Indians, \$20 up; Marshes, \$20 up. Don't purchase any Motorcycle until you get my prices. All guaranteed for one year. M. E. King, 213-217 West 125th St., New York City. (1)*

MUSIC

OLD FAVORITE SONGS, with music (Annie Laurie, Swanee River, America, Tramp, Tramp, etc.), 5c., six 25c.; Dream Books, 25c. Art Printing Works, Hamilton, Ohio.* (1)

PATENT ATTORNEYS

"PATENTS AND PATENT POSSIBILITIES," a 72-page treatise sent free upon request; full of valuable and interesting information; tells what to invent and where to sell it. Write to-day. H. S. Hill, 928 McGill Building, Washington, D. C.

PATENTS THAT PROTECT. Careful, honest work in every case. Patent your ideas, they may bring you wealth. 64-page book free. Fitzgerald & Co., 808 F St., Washington, D. C. Established 1878.

"MONEY IN PATENTS" tells the truth about the subject. It is free to inventors. Write to-day. Patent secured or fee returned. Herman A. Phillips, 1104 L. & T. Bldg., Washington, D. C.

THE PATENTOME tells all about patents and how to get them. Free on request. Established 1865. Anderson & Sons, Patent Solicitors, 730 G Street, Washington, D. C.

MONEY IN IDEAS—EDISON, Greatest Inventor, tells "How to Invent" in booklet, sent free, by Henry N. Copp, Registered Patent Attorney 54, Washington, D. C.

INVENTORS—Send us a copy of your patent or invention and we will submit our liberal proposition to you. Atlantic Supply Co., Long Branch, N. J. (3)

SEND FOR FREE BOOKLET, All About Patents and Their Cost, Shepherd & Campbell, 500 F, Victor Bldg., Washington, D. C.

"PATENTS AND PATENT POSSIBILITIES," a 72-page treatise sent free upon request; full of valuable and interesting information; tells what to invent and where to sell it. Write today. H. S. Hill, 928 McGill Building, Washington, D. C.

PHOTOGRAPHY

REAL PHOTOGRAPHS FROM LIFE, of Artist's Models, exquisite portraits of female loveliness, 3 for 25 cents. One 6x8 Fire Tone given FREE with 50c order. Royal Art Co., Dept. G, Grand Rapids, Mich.

PICTURES AND POST CARDS

25 BEAUTIFUL POST CARDS of Washington, D. C. Newest designs in colors showing views of Government Buildings and other subjects. Post-paid, 25c. Fred Mayer, 105 Pennsylvania Ave., N. W., Washington, D. C. *

HELIGOLAND ELECTRIC LIGHTHOUSE. Most powerful lighthouse in the world. Post-cards of this lighthouse on sale. 4c mailed anywhere. We carry the largest assortment of lighthouse postcards of any firm in the world. We also sell Irish scenery, etc., etc. Complete list sent anywhere for 2c. Lighthouse Mission, Dept. M. E., Linenhall St., Belfast, Ireland. (1)

REAL ESTATE

FARMS Bought, Sold and Exchanged. Write Chas. A. Phildius, 388 Pleasant Ave., New York. (2)

SCIENTIFIC INSTRUMENTS

WE BUY, SELL AND EXCHANGE. Bargains in Microscopes, Telescopes, Field Glasses, Cameras, etc. Catalogue and Bargain List free. Kahn & Co., Established 1850. 26 John St., New York. * (1)

STAMPS, COINS, ETC.

\$7.75 PAID FOR RARE DATE 1853 Quarters, \$20.00 for a Half-Dollar. We pay cash premium on hundreds of coins. Keep all money coined before 1880, and send 10 cents at once for our New Illustrated Coin Value Book; size 4x7. It may mean your fortune. C. F. Clarke Co., Coin Dealers, Dept. 16, Le Roy, N. Y.* (i)

GET ACQUAINTED with the largest philatelic supply house in the South. See adv. on page 820. Special this month, 50 all different stamps from Central and South America, 25 cents. H. Leonard, 107 E. Ninth St., Jacksonville, Fla. (i)

OLD COINS BOUGHT AND SOLD—My new 50-page coin selling catalogue just out free. Buying coin catalogues sent on receipt of 10c in stamps. William Hesslein, Malley Bldg., New Haven, Conn. (i)

STAMPS 100 ALL DIFFERENT, FREE. Postage 2c. Mention paper. Quaker Stamp Co., Toledo, Ohio. (1)

105 CHINA, Etc., Stamp Dictionary and list, 2c. A. Bullard, Station A, Boston.

TYPEWRITERS

TYPEWRITERS: Caligraph, \$6.00; Hammond, Yost, Densmore, Williams, \$10.00; Remington, \$12.00; Smith Premier, \$15.00; Oliver, \$24.00; Underwood, \$30.00; all makes on hand; fifteen days' trial allowed, and a year's guarantee. Send for catalogue. Harlem Typewriter Exchange, Dept. M. E., 217 West 125th St., New York City. (i)*

WIRELESS

WIRELESS—10 samples of fine, tested minerals, all for \$2.00, regular price \$6.00. Only 25 orders at this price will be taken, the balance will be returned. Samples of minerals are as follows: Zincite, Iron Pyrites, Pyron, Bornite, Columbite, Copperpyrite, Galena, Azarite, Silicon, Chalcoppyrite, all postpaid, \$2.00. Send 2-cent stamp for large wireless catalogue. Independent Wireless Co., 302-304 Broadway, New York, N. Y.

ATTENTION—While they last, 50 double slide tuning coils, wound with enamel wire, all metal parts nickel plated, will tune up to 1,500 meters, with 30 ft. aerial, at \$1.75 each, worth \$3.00. I also wind secondaries from 1/4 to 3 K. W. at prices that will surprise you. Let me know your wants and I will quote you prices. A. C. Courtney, 2404 Westwood Ave., Baltimore, Md.

HOT WIRE AMMETERS—Are you building the one described in the February 1911 MODERN? Use my Climax Wire. Number 36 for stations above 1/2 Kilowatt, send 10 two-cent stamps. Number 40 for stations 1 inch up to 1/2 Kilowatt, send 15 two-cent stamps. Milton Berel, 870 Longwood Ave., Bronx, N. Y.

WIRELESS

ATTENTION—Special for this month on Shop-worn goods. All guaranteed to be in perfect working condition: 110-V. Arc Lamps, \$3.00; 110-V. 1/10 H. P. Motor, \$5.00; 1 1/4-inch Spark Coils, \$4.50; Coherer and Decoherer, 85c; Old Style Universal Detector Stand, 30c; No. 8488 Single Slide Tuner, \$2.00; No. 12000 Single Slide Loose Coupler, \$3.00. Send four cents in stamps for our new catalogue No. 10. Electro Importing Co., 233 Fulton St., N. Y.

A NUMBER of high class induction coils, 6-inch spark gap upwards, for sale at reduced price. State your requirements in regard to spark gap and we will quote you lowest price. We should be pleased to receive inquiries for condenser, of which we have large quantity in stock. Meyrowitz, 104 E. 23d St., New York City. (i)*

The NEWEST THING IN WIRELESS is the new Perycarbon Detector. Send stamp for our catalog of the goods "that beats them all." Alden Wireless Co., Dept. M., Campello, Mass. (1)

FULL LINE OF E. I. CO.'S GOODS IN STOCK. Fill orders for Toledo and suburbs as E. I. Co.'s catalogue No. 9. No mail orders. P. & W. Electric Co., 1012A Monroe St., Toledo, Ohio. (1)

WIRELESS MATERIAL in Detroit. We carry a complete stock of Electro Importing wireless goods and sell at regular prices. Save time and express charges. Come to our store and select your needs. Cannot handle mail orders. W. J. Hartwig Co., 205 Jefferson Ave., Detroit, Mich. (1)

PURE ZINCITE CRYSTALS, iron pyrite, bornite, carborundum, galena; fresh from the mines. All tested for sensitiveness. Large piece each 35c. prepaid. Dr. Jenkins, 75 West 131st St., New York City.*

LOOSE-COUPERS—Two slides for primary, 8 point variation switch on secondary. Price \$8.50. Send 2c stamp for catalog. The Merker-Flocker Electric Co., 957 Liberty Ave., Pittsburgh, Pa. (1)

WIRELESS OPERATORS!—My New Speed Chart will teach you to receive from the Fastest Operators. Morse, Continental and Navy Codes on one chart, 50 cents (no stamps). Fred Fulgora, Box 356, North Diamond Station, Pittsburgh, Pa.

QUESTIONS ANSWERED FREE—Send for our complete instructions and drawings for making spark coils and condensers, 1/2 to 14 inch spark. 20 cents. Nomus Electric Co., 1216 48th Avenue, Cicero, Ill.

BEST WIRELESS INSTRUMENTS on the market are made by us. F. B. Chambers & Co., 217 North Ninth St., Philadelphia, Pa. Look for other Add. (1)

WIRELESS BLUE PRINTS—Receiving Trans-mitting Circuits, 25c. Stanley Patten, 172 W. 98th St., New York.

WITH THE APRIL NUMBER

MODERN ELECTRICS will be 15c. on newsstands, annual subscription \$1.50 per year. Orders will be taken until April 1st at the present price of \$1.00 per year. Subscriptions at this rate not taken longer than five years. Will you send in your's **to-day, now**, before you forget it?



No. 364

MURDOCK WIRELESS APPARATUS

possesses the constructive niceties, the operating efficiency, and the permanent worth, which invariably win the confidence and the outspoken estimation of its owners.

The variable condenser, pictured above, is one of the constructional achievements which sustain the MURDOCK reputation.

Capacity .0005 m.f., used most effectively for sharp and accurate tuning of secondary receiving circuits.

Priced at \$3.00, it is absolutely the best value ever offered.

Order No. 364.


WM. J. MURDOCK CO.

40 Carter Street, Chelsea, Mass.

221 S. Clinton Street
Chicago.

162 Minna Street
San Francisco

THE BEST STEP-UP TRANSFORMER ON THE MARKET

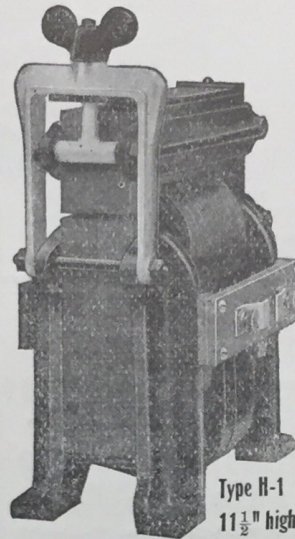

Type H-1


11 1/2" high

The Thordarson Flexible Step-up Transformer surpasses every other make in all respects save price. Cheapest because it lasts longest. Extremely powerful. Design and construction embody highest type of mechanical and electrical perfection. May be used for Wireless Work, Generation of Ozone, Testing Insulation, Electro-Static, Separation, etc. For alternating current only.

Write for circular giving full information and prices.

THORDARSON ELECTRIC MFG. CO.

224 SO. JEFFERSON ST., CHICAGO

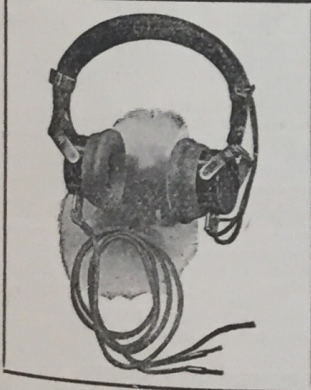

HOLTZER-CABOT Wireless Receivers


Extremely Sensitive. Comfortable to Wear. Genuine Hard Rubber Shells with Aluminum Inner Shells, insuring permanent adjustment. Silk Wound Coils. Leather Covered Head Bands. "Solid Comfort" Cushions. Silk Cords.

"The Kind That Satisfies"
Send for Booklet 20-M-3

The Holtzer-Cabot Electric Co.
BROOKLINE, MASS., AND CHICAGO, ILL.

Just What EVERY MAN NEEDS

Practical German Silver Key Ring. The best and handiest yet produced, 10c. POST PAID. Special terms to dealers and agents. Write me today for them.




S. I. OVICI

Manufacturer and Importer of Fine Cutlery and Hardware Specialties, 25 West 42nd St., Central Building, New York City, N. Y.

Red or Black VULCAN STYLOS

Moderate priced, easy-writing pens that give satisfaction; unequalled for rapid writing and ruling.



\$1.00

Postpaid

Two Sizes, 4 1/4 and 5 1/2 inches.
Extra Size, 8 inches (Black Only), \$1.25.

AGENTS
WANTED

J. ULLRICH & CO., Dept. 35, 27 Thames St.
Manufacturers of Stylo and Fountain Pens
NEW YORK

T.W.C. TRANSFORMERS

RELIABLE
EFFICIENT 25% OVERSIZE
PERFECT CONSTRUCTION
Highest Quality Reasonable Prices

1-4 K. W. \$12.00 1-2 K. W. \$18.00
"Compare These Prices With Others"


ONE YEAR'S GUARANTEE

EVERYTHING IN THE TRANSMITTING LINE
Send Stamp for Catalogue

A Few More Agencies Open Address Dept. C.

TOLEDO WIRELESS COMPANY
DEPT. D.
TOLEDO, OHIO

When writing, please mention "Modern Electrics."

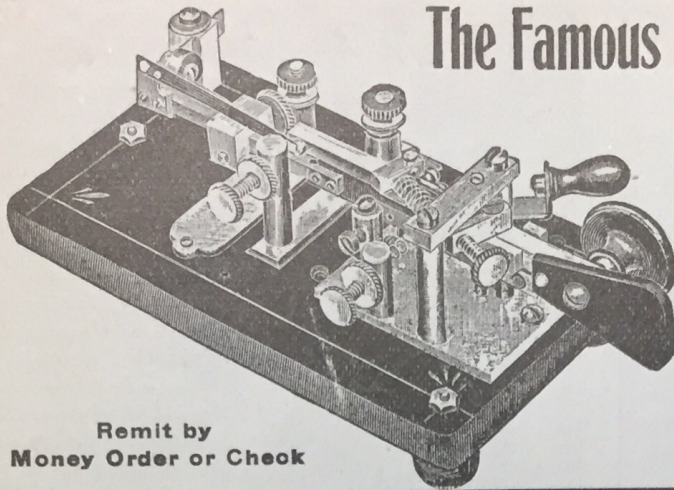

Remit by
Money Order or Check

The Famous Horace G. Martin Vibroplex

THIS TELEGRAPH SENDER IS ESPECIALLY ADAPTED FOR WIRELESS. EVERY MAN INTERESTED IN WIRELESS SHOULD HAVE ONE OF THESE MACHINES.

PRICE, \$10.00


J. E. ALBRIGHT
SOLE SELLING AGENT
DEPT. A, 253 BROADWAY
NEW YORK

"CURE YOURSELF BY ELECTRICITY"

New Book—Illustrated from Life—Sent FREE to all who write.

Write to-day for our new Free Book—"Cure Yourself by Electricity"—Illustrated with photos from life. Shows how the New Home Batteries cure Rheumatism, Neuralgia, Lumbago, Headache, Insomnia, Constipation and all nerve affections and diseases arising from sluggish circulation; also how they afford electric baths and beauty massage without cost at home.

THIS
BATTERY

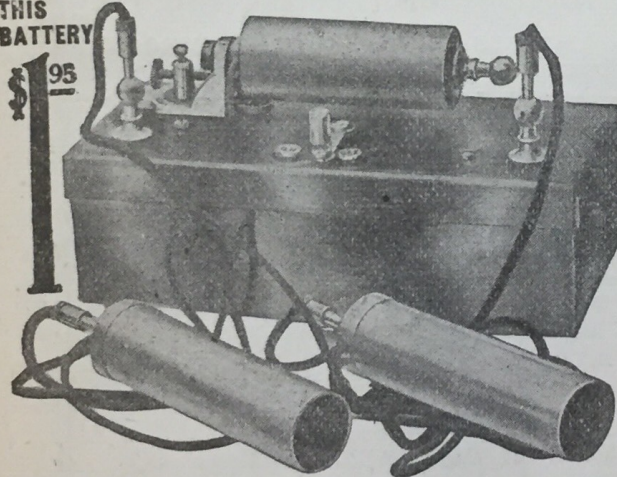


Every Home Should Have a Home Battery.

We send our batteries without a cent in advance (prices \$1.95 and up) and allow 10 DAYS' FREE TRIAL. Write for our Book.

DETROIT MEDICAL BATTERY CO.,
490 Majestic Bldg., Detroit, Mich.

Only \$12

Needed to start you in the Auto Business as Repairman or Chauffeur.

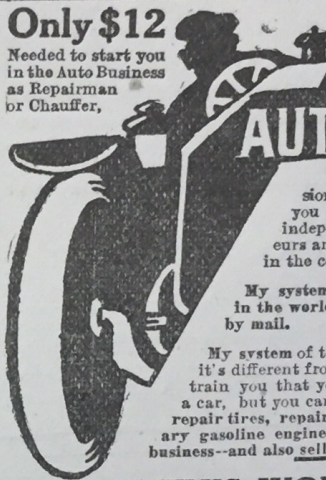

LEARN TO RUN AND REPAIR AUTOMOBILES

Why don't you learn this profession and double your salary? If you master this profession you are independent. Repairmen and Chauffeurs are needed in every town and city in the country.

My system is positively the only system in the world that can be successfully taught by mail.

My system of teaching by mail is a New Idea—it's different from others. I will so thoroughly train you that you will not only be able to drive a car, but you can repair motors, overhaul cars, repair tires, repair launch engines, repair stationary gasoline engines—you could go into the repair business—and also sell cars and engines.

SEE THIS WORKING MODEL

There are other models: one of a Magneto, Engine and Carburetor; also a Manikin of an automobile. The Manikin can be taken apart and the models actually work. All moving parts on the models made of real metal.


The Course consists of 40 instructions, 5 Models, and a Manikin, and examinations, diploma, etc. Special price right now is but \$12.00. If you paid \$1,000.00 you couldn't get a better course—nor as good a course—because it is the only one of its kind.

Let me show you what others say who we have started and who have doubled their income. Let me show you what Barney Oldfield, Chas. Duryea and other motor authorities say.

SEND FOR MY FREE BOOK
"How to get into the Auto Business and Its Opportunities."

Dyke's Correspondence School of Motoring
Box 19, Roe Building, ST. LOUIS, MO.


(A. L. Dyke is the originator of the first Auto Supply Co. in America)



ONE OF THE WORKING MODELS

With this engine model you learn the principle of a gasoline engine and you can actually set the valves, time the ignition, etc.

TWIN GRIP WRENCH

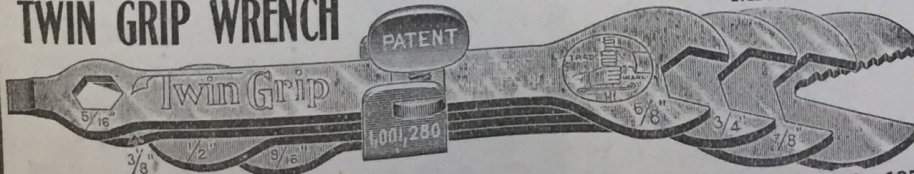

Eight Wrenches and a Screw-Driver

MAILED ON RECEIPT OF \$1.00

Tempered Steel, Nickelplated, Useful Everywhere.

TO USE—Loosen the Thumb-Screw and extend the one required; then tighten. By turning the small latch, each blade can be used separately.

Packed in a neat box.

TWIN GRIP SALES CO., 1974 Broadway, New York

SPARK COILS.

The highest grade Wireless Coil yet produced. They are without exception the best value ever offered by anyone. Guaranteed full rated spark—heavy contact points—Hammerblow vibrator, does not "stick." 1 inch, \$5.40; 2 inch, \$9.00.

We handle the Murdock and Adams-Morgan goods—prompt deliveries. The best in wireless can be obtained from J. ELLIOTT SHAW CO.
625 Arch Street Philadelphia

Learn Electric Signalling



At Home—By Mail
A splendid profession. Great opportunity. Big demand by railroads for electricians. More men needed all the time to fill vacant positions. You can keep present position while learning. Rapid advancement from the first. Easy to learn. Taken but short time. Write today for free booklet. Do not put this off. Special offers to new students.
DEPARTMENT OF SIGNALLING, 494 Cass St., CHICAGO

When writing, please mention "Modern Electric."

New Type Commercial Wireless Receiver




We have had these Receivers tested out on Trans-Atlantic service for twelve months before putting them on the market.

Complete set 2000 ohms. Price, **\$7.50**
Also wound any resistance desired.
Prices on application.

Electrical Industries Mfg. Co.
328 West 41st Street, New York

"BLITZEN"

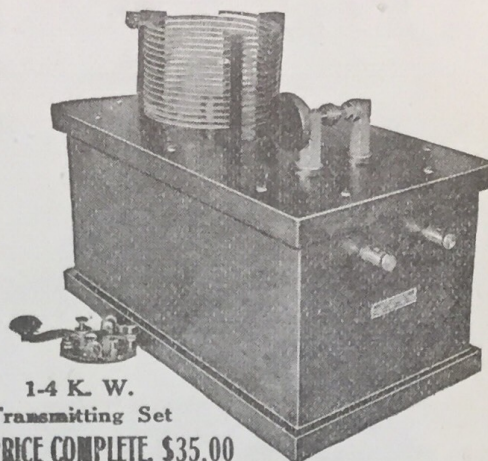


1-4 K. W.
Transmitting Set
PRICE COMPLETE, **\$35.00**

BLITZEN TRANSFORMERS
1/4 K. W., **\$15.00** 1/2 K. W., **\$22.00**

Complete catalog of apparatus for commercial and private installation sent for 4c. stamps.

CLAPP - EASTHAM CO.


143 Main St. CAMBRIDGE, MASS.
AYLSWORTH AGENCIES CO., 143 Second St.
San Francisco, Cal. . . Western Sales Agents



Blitzen Transformer For Wireless, Magnetic Leakage Type. A Year's Guarantee, 1-4 K. W., \$15.00. 1-2 K. W., \$22.00.

BIG 250-p. Catalogue JUST OUT

ELECTRICAL AND WIRELESS GOODS
Mailed for 6c. stamps or coin, which may be deducted from first order of \$1.00. Largest and most artistic Electric Catalog published. 85 pages WIRELESS Instruments for commercial and experimental use. 30 pages Motors and Dynamos of all sizes. 35 pages Miniature Trains. 20 pages Telegraph Instruments. 30 pages Electrical Novelties, etc. 50 pages general Electrical Supplies.
J. J. DUCK, 432-34 St. Clair Street, TOLEDO, OHIO.



Improved Ferron Detector
New Price, **\$5.00**

WIRELESS SPARK COILS


These coils are designed especially for Wireless Telegraphy and High Frequency Work. We believe our coils the most efficient made. A trial will convince you.

1/4 inch	\$2.00
3/8 inch	3.00
1/2 inch	3.65
3/4 inch	3.95
1 inch	5.50
1 1/2 inch	7.75
2 inch	15.50
3 inch	25.00
4 inch	50.00
6 inch	

Not Mailable.

FLETCHER-STANLEY COMPANY
No. 32-34 Frankfort Street, New York City

Reliable Wireless Apparatus

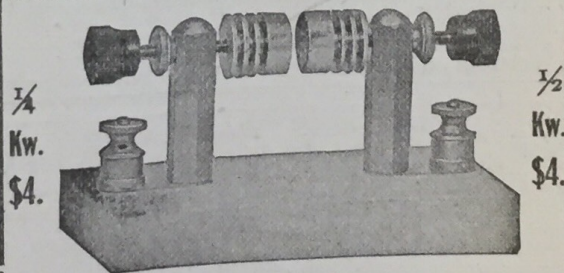


No. 21 Spark Gap.

The gap that does not heat. Special alloy electrodes with radiators where they are most effective. Base of marble, metal, nickel plated. Send stamp for catalog showing best line made.

ALDEN WIRELESS CO., Dept. M., (Campello Station) BROCKTON, MASS.

LOOK

"Etherec" Induction Coils



Etherec Wireless Mfg. Co., 278 Lenox Ave., New York City
When writing, please mention "Modern Electrics."

LOOK LOOK WIRELESS APPARATUS

Guaranteed 1 in. Spark Coil \$5, reduced to \$3.95. 37 Plate Rotary Type Condenser, \$12, reduced to \$9. 25 Plate Rotary Type Condenser, \$9, reduced to \$7. 15 Plate Rotary Type Condenser, \$6, reduced to \$4.50. 1000 Ohm. Double Pole Receiver, \$3 red. to \$1.20. Professional Tuning Coils \$2.75, red. to \$1.75.

SEND 2c STAMP FOR CATALOGUE


WIRELESS TELEGRAPHY.

Expert instruction. Low fees. Full equipment. Grants certificate. Prepares for Government license. Graduates now with Western Union, Postal, and United Wireless Telegraph Companies. Booklet "X" free to any address.

EAST SIDE Y. M. C. A. TELEGRAPH SCHOOL
153 E. 36th Street New York City

When writing, please mention "Modern Electrics."

THE DIXIE IRON BOX BELLS AND BUZZERS

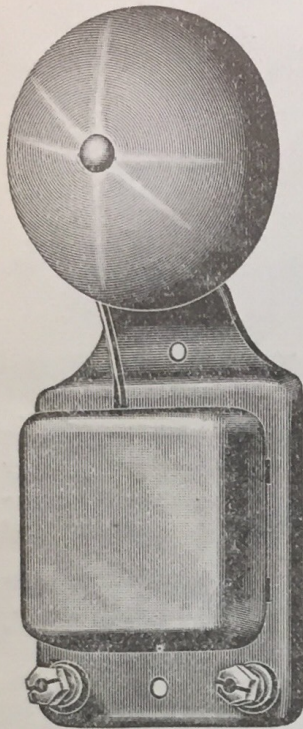

PIVOTED ARMATURE

The Latest Improvement in Bells

☐ Rust Proof ☐ Bug Proof
☐ Dust Proof ☐ Fool Proof

All the advantages of all the others and some new ones besides.

Sizes 2½ inches, 3 inches and 4 inches and Buzzers.

From any dealer or direct from Manufacturer.

Edwards & Co., Inc.


140th and Exterior Streets

NEW YORK CITY



Manufacturers of Electric House Goods of Quality for 40 Years

STORAGE BATTERIES



NOT A CHEAP MAKE BUT A
RELIABLE PRODUCT CHEAP

2	Volts	10	Amp. Hours	\$0.95
2	"	20	"	1.49
2	"	40	"	1.85
2	"	60	"	2.32
4	"	10	"	2.48
4	"	40	"	4.30
4	"	60	"	5.20
6	"	40	"	5.72
6	"	60	"	6.80

Other sizes quoted upon request. These SPECIAL BARGAIN PRICES can only be obtained when you cut this ad out and send it with your order.

COSMOS ELECTRIC CO.

136-M Liberty St.

New York

WIRELESS BARGAINS

Fixed Condenser No. 625 in our Catalogue...\$.90
 No. 14 B. & S. Aluminum, per lb.50
 Spark Gap No. 930 in our Catalogue..... .55
 Mineral Testing Detector Stand75
 Our famous adjustable Detector No. 608..... .75
 Tuning coil 12 in long double slide..... 2.15
 Amateurs wireless key No. 308..... 1.00
 High resistance receivers No. 610..... 6.00
 Send a two-cent stamp for our catalogue. No
 attention paid to postals.
 The Broadway Wireless & Electrical Nov. Co., 780 Broadway, Brooklyn, N. Y

If you are keeping your copies for reference, it is necessary to obtain one of our beautiful automatic binders, holding twelve issues. It is made of a rich, green vellum, stamped with gold lettering.

Price prepaid, 50 Cents.

Every Man a Winner!


JUST A WORD ON
PROFIT SHARING
INVESTMENTS ❀❀

Opportunities Magazine

No man need waste a single one of his Loafing Dollars who is a subscriber to this great Feature Magazine, covering Mine Investments, Stocks, Bonds, Finance, and Industrials-National in Scope. All Get-Rich-Quick schemes and frauds exposed.

Opportunities Magazine
DULUTH, MINN.

When writing, please mention "Modern Electrics."

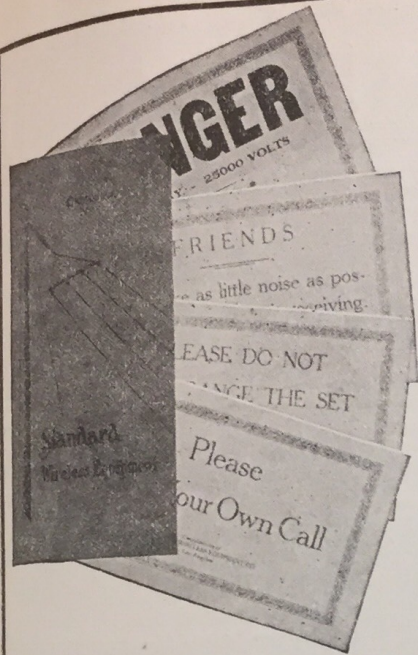


Standard Wireless Equipment Co.
288 WILCOX ANNEX,
Los Angeles, Cal.

Eastern Agents:
EASTERN WIRELESS EQUIPMENT CO.
Trinity Building, New York

OUR REPUTATION

for workmanship and finish is a guarantee of excellence in construction, but we wish to lay emphasis upon the distinctively high degree of efficiency and operating characteristics, which have, in this type of wireless equipment, been attained.


Our catalog will prove of unusual interest to both the experimenter and those who are commercially interested in radio communication. It will be promptly forwarded upon request, together with a number of attractive wireless station cards as herewith illustrated.

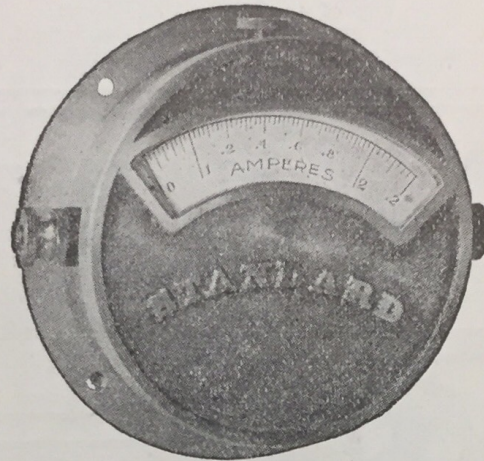

STANDARD HOT WIRE METER

Case and cover are solid brass castings, beautifully finished. May be used upon a set of any size. By proper tuning with the aid of this instrument, the range of a set is often doubled. This instrument is by far the most attractive and finely constructed low priced hot wire meter which is at present obtainable. **Price, complete, \$6.00.**

Wireless Transformers and Induction Coils

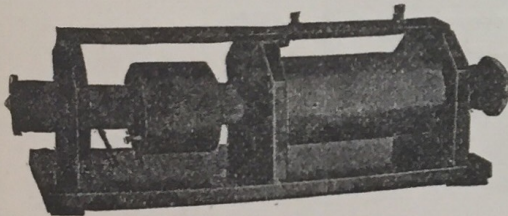

1/2 K. W. Transformer complete \$30
with Condenser and Spark Gap
This is something new. Send for Catalog and Prices
E. S. RITCHIE & SONS
115 Cypress St., Brookline, Mass.



The most wonderful and fascinating study of the age. Everybody should have a copy of the new "VOL-TAMP ELECTRICAL PRODUCTS"—our 112-Page Catalog—now ready. The most complete and interesting book ever issued. Full of illustrations and descriptions of VOLTAMP Novelties—Motors, Dynamos, Telegraph and "Wireless" Instruments, Spark Coils, Lamps, Flashlights, Transformers, etc. Everything electrical for the experimenter. The greatest line of **Miniature Electric Railways** ever shown. Catalogue with valuable coupon sent only for 6 cents in stamps or coin. (No postals answered.)

VOLTAMP ELECTRIC MFG. CO.
Mole Bld. 406 Jasper St. Baltimore, Md.

LEYDEN JARS COPPER COATED

lating fluid; the coating is in *direct contact with the glass*, thereby procuring *increased efficiency*. Order from your dealer or send us money order with your dealer's name and address. PINTS....\$1.50; QUARTS .. \$2.25. Also large sizes. Add 25 cents for postage for each jar. Handsome hard wood cover and copper fittings, 25c extra

FRANCIS STORM 63 FULTON ST., N. Y.
ESTABLISHED 1856

Experimenters' Supplies

Raw Materials, Parts and Finished Apparatus for all designs described in the current and back numbers of this magazine. Bases for detectors, spark gaps, transformer iron, wire, crystals, etc. Most Complete Line of Wireless Apparatus on the Pacific Coast at Eastern Prices. Write for prices or your requirements.

Haller-Cunningham Electric Co.
428-A Market Street, SAN FRANCISCO, CAL.

LICENSED AGENTS FOR THE SALE OF PERIKON CRYSTALS

By the Wireless Specialty Apparatus Co., New York **\$1.00 per Set**
LONG DISTANCE WIRELESS CO. SUPPLIES

GEO. S. SAUNDERS & CO.
168 Washington Street BOSTON, MASS. 11 Devonshire Street

FREE PREMIUMS


We offer below a complete assortment of FREE Premiums, any one of which may be obtained by a little extra effort. You are now reading **MODERN ELECTRICS**, which means it must be good, then show it to your friends. Help yourself and help us to build up the biggest circulation of any electrical paper in the United States. You don't have to be a subscriber to take advantage of this chance to obtain a valuable instrument for nothing; it only takes just a few minutes of your time. Show the magazine to your friend, give him a few pointers on the magazine and nine times out of ten, he will subscribe. Get the subscription, send it to us and we will forward by return mail the premiums you select. Your own (NEW) subscription will count. Now get busy and get something practical FREE.



Junior Fixed Condenser.

Used in all modern receiving sets. Special dielectric giving extra high capacity. Sealed in hard rubber base with binding posts, as shown. Sells for \$0.50. (Add 6 cents for postage.)

Given free for 1 subscription.




Wireless Engine.

The Slickest little engine ever placed on the

market. You cannot see a piece of wire. Has two fly-wheels and beautiful balancer. Cast iron base; works on one dry cell. The engine sells for 45 cents. (Add 14c. for postage)


Given free for 1 subscription.



Zinc Spark Gap mounted on hard rubber base. Electrodes fitted

with rubber handles. Pure zinc rods. Used in all of the best stations. Spark gap sells for 60 cents. (Add 7 cents for postage.)


Given free for 2 subscriptions.

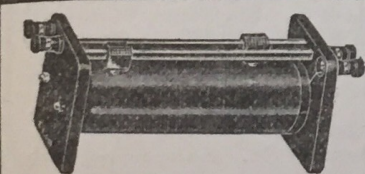

"Electro" Junior Tuning Coil.

Slickest tuning coil on the market. Has solid hard rubber ends, bare copper winding, hard rubber sliders. Size, 8 x 3 3/4 x 3 3/4 in. Weight, 1 1/2 lbs. The most beautiful and most practical coil made. "Electro" Tuner sells for \$2.00. Sent by express only.

Given free for 5 subscriptions.




Pony Telephone Receiver.

This is the receiver you have long wanted. The best one on the market. Hard rubber case. Single pole, powerful magnet. Hook can be screwed off. Standard resistance of 75 ohms. Receiver sells

for 40 cents. (Add 7 cents postage.)

Given free for 1 subscription.



"Electro" Rheostat

Rotary adjustment. Air cooled. Very useful to vary the speed of motors and

small lamps. Wound with non-rusting wire.

Given free for 1 subscription.



"Electro" Medical Coil. All quality. No end of fun with one of these coils.

besides its therapeutic properties. Complete with cords and handles. Medical Coil sells for 70 cents. (Add 12 cents for postage.)


Given free for 3 subscriptions.



"Electro" Amateur Phones, 2000 ohms resistance. Wound with No. 50 copper wire. Thin diaphragms. Leather covered adjustable headband. Weight 15 oz. 80 per cent. better than 75 ohm phones. Phones

sell for \$4.50. (Add 25 cents for postage.)

Given free for 10 subscriptions.



Six Inch Geissler Tube With Liquid.

A fine tube; works on any spark coil. Gives the most beautiful, astounding colors. Tube sells for 50 cents. (By mail extra ten cents)

Given free for 1 subscription.




Aero-Flying Machine

A practical miniature aeroplane; by plane type. Guaranteed to fly 100 feet.

A well constructed machine. Aluminum propeller; rubber motor. Sells for 75 cents. (Add 12 cents for postage.)


Given free for 3 subscriptions.



"Electro" Lytic Bare Point Detector. Holds the world's record for long distance receiving. Mounted on hard rubber base. Finest adjustment. Increase your receiving range 30 to 40 per cent.

"Electro" Lytic Detector sells for \$1.25 (Add 12 cents for postage.)

Given free for 3 subscriptions.



One Inch Bull Dog Spark Coil.

This is the coil that has sent a message 90 miles with a suitable aerial. None better. None better. None better. None better. None better. None better.

looking. Has French fibre casing. Sells for \$1.50. Can go by express only.

Given free for 12 subscriptions.

Please understand that we have an invariable rule that premiums cannot be given unless you ask for them, when sending in the subscriptions.

We are sure you can get any of the above premiums by showing this magazine to your friends, doing a little talking. Then is your chance, get the subscription before the other fellow gets it. Strike while the iron is hot. Act Now. Don't delay, the offer is new now and lots of people will get busy at once.

This is the best season of the year for subscriptions. Everybody reads. Everybody subscribes.

Send money order, draft, express money order, cash or stamps; no checks please.

MODERN PUBLISHING COMPANY, 233 Fulton St., New York

The Latest is Now Out!

THE book which thousands of electrical workers have been waiting for, is acclaimed as the "last word" on applied electricity, up-to-date, present minute.

Practical Applied Electricity

By DAVID PENN MORETON, B. S., E. E.

Contains 450 Pages, illustrated with 273 line drawings and 50 half-tones; 20 full pages of valuable tables. The index, one of the vital factors of any handbook, is complete and unsurpassed. Bound in flexible black leather, 4 1/4 x 7 1/4, printed title on cover in gold letters.

All interested in electricity, old or young, artisan or amateur, expert or experimenter, should own this positive authority. It answers questions, and enables you to figure those complicated calculations.

Price, \$2.00

By mail extra 12c.

The Modern Publishing Co.

233 FULTON ST., NEW YORK CITY

When writing, please mention "Modern Electrics."

Aviation Club Subscription Offer

To please our many friends who have requested us to furnish the name of a publication devoted exclusively to aviation, we have through a special arrangement, secured a low subscription rate.

"AIRCRAFT", is probably one of the best publications in this country on aeronautics. It is profusely illustrated, and contains the latest news from all over the world, including monthly data on the various records. We can offer

MODERN ELECTRICS and AIRCRAFT

One Year combination subscription, at \$1.80. The regular price of both magazines would be \$2.60, and therefore there is a saving of \$0.70.

Don't fail to take advantage of this offer, if you are interested in the latest news in the electrical field as well as in aeronautics.

Modern Publishing Company
233 Fulton Street, New York City

When writing, please mention "Modern Electrics."

Premium Catalog

Containing over 600 electrical articles anyone of which you may acquire for NOTHING, simply by getting us new subscribers will be sent you on receipt of 2c. stamp.

Modern Publishing Co.
233 Fulton Street, New York


When writing, please mention "Modern Electrics."

Wireless Supplies Electrical Novelties

Boys in Chicago and vicinity are invited to call at our store and look over our lines. We are Western Distributors for

THE ELECTRO IMPORTING CO.

Same Catalog. Same Prices.

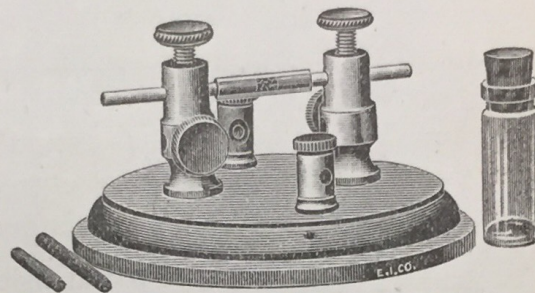


Auto-Coherer, Like Cut—Special 55c.

Anderson Light & Specialty Co.

KNOWN AS

La Salle Light Store

140 No. La Salle Street - - Chicago
Opposite New City Hall



EVERY PROFESSIONAL OPERATOR

knows that the use of sliders in tuner construction has been one of the weak points in wireless. We have over-

come this in our Professional tuner by the use of switches instead, with the result that we get greater selectivity, distance, louder signals, quicker tuning and more convenience to the operator. In tuners the best only is good enough, and we make it.

MILLER WIRELESS INSTRUMENT CO.
5223 Ballard Avenue Seattle, Wash.
Send 4 cents postage for catalogue.

THE HAT WITH THE MOST FRIENDS!



3 Felt Hats IN ONE

Sent Postpaid to You for Only

THE HAT THAT DON'T BLOW OFF

The noblest and most comfortable hat you can buy at any price for dress, business, travel, motoring, and all sports. It is made of genuine English felt, has flexible leather sweat band, and will wear like iron. Can be rolled up and into several shapes without damaging. All sizes in black, blue, brown, and gray. If not exactly as represented—drop me a line and I will refund your dollar by return mail—and you may keep the hat. You can't lose—send ME a dollar to-day. Two for \$1.80. Write for Booklet of "Working Clothes for Workingmen."

GEO. T. BUNGAY, 28 S. William Street, N.Y.

Industrial Engineering

is a monthly journal of Mechanical Engineering and Scientific management, being the leading authority on the latter subject.

It presents all the latest developments in mechanical engineering, particularly as it relates to industrial plants, written in condensed style so as to economize the time of busy men who form the bulk of its readers—mechanical engineers, works managers, superintendents, plant owners, consulting engineers, etc. Its articles on Scientific Management are practical, being descriptions of what has actually been done in plants operating under this form of management and are prepared so that the information in them can be applied by the reader in his own work.

Subscription price, \$2.00 per year
Canadian, \$2.25

Foreign, \$2.50

Sample copy sent on request

Industrial Engineering

140 Cedar Street, New York


"THE ELECTRIC LIBRARY"

NO. 4

Wireless "Hook-Ups"

WITH A CHAPTER BY
H. Gernsback

"HOOK-UPS" SELECTED AND ARRANGED BY
G. E. Rudolph

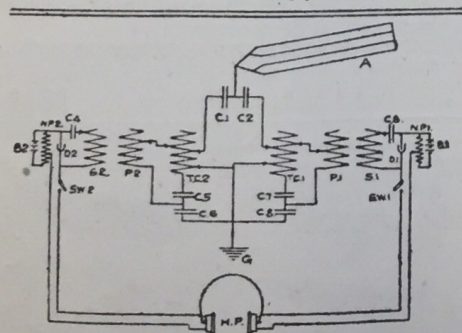

A-AERIAL
B-BATTERY
C1-C2-0.1 MF CONDENSERS
C3-C4-0.003 MF
D1-DET. ELECTROLYTIC DETECTOR
G-GROUND
H-H.P.
H.P. 2000 OHMS RECEIVERS
NPNP2-NONINDUCTIVE POTENTIOMETER
P1-P2-PRIMARY LOSS COUPLERS
S1-S2-SECONDARIES
SW1-SW2-ONE POINT SWITCH
TC1-TC2-TRIPLE SLIDE TUNERS

171 ILLUSTRATIONS 96 PAGES

PRICE 25 CENTS

FIRST EDITION
PUBLISHED BY
Modern Electric Publication
233 FULTON STREET, NEW YORK

"Wireless Hook-Ups"

96 PAGES 160 "HOOK-UPS"

This is No. 4 of our popular "ELECTRIC LIBRARY." This book, at the price we are selling it, is by far the greatest bargain we have ever offered.

The book contains nothing but wireless connection diagrams in a concise and clear manner, fully illustrated. Every conceivable diagram is here—none missing—from the simplest receiving diagram to the most complicated sending and receiving hook-up.

No matter what instruments you have, you will find a perfect hook-up, THAT WORKS, in our new book. Besides good directions, explanations, etc., are given wherever necessary.

This book will be the delight of every wireless "fiend" and will enable him to get far better results from his instruments and cover much greater ranges.

Suppose before you turn this page, you sit down and mail us 25 cts. using the coupon, and you will surely not regret it.

Price 25 Cents Prepaid
Modern Publishing Co. 233 Fulton St. N. Y.

SEND US THIS COUPON

Modern Publishing Co.
233 Fulton St., New York, U. S. A.,
Please send me at once one
copy of your new book "WIRELESS
HOOK-UPS" for which I enclose 25c in


Name.....
St. and No.....
City..... State.....

When writing, please mention "Modern Electrics."

W. A. O. A. WATCH FOBs



Style A

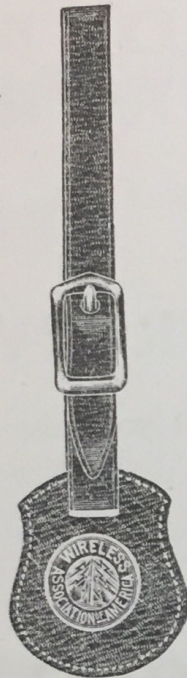

Style B

These two beautiful watch fobs will be acclaimed with enthusiasm by every W. A. O. A. member. They are the very thing you have wanted and they are within the reach of everyone.

We have contracted for a large quantity of these fobs with the foremost makers and the same quality fobs usually sell for 75 cents or \$1.00 at most stores.

Style A shows our genuine silk fob with **GOLD ROLLED** metal rim; our standard wireless button is furnished in **TRIPLE GOLD PLATE**, guaranteed for years. This is our best fob. **PRICE 50 CENTS.** By mail extra 4 cents.

Style B shows our leather watch fob. This is a very classy design. Only the best Morocco leather used. Button is **TRIPLE GOLD PLATE**. This fob will last for long years. **PRICE 50 CENTS.** By mail extra 4 cents.

Shipments will be made immediately. No waiting.

Address all orders to
WIRELESS ASSOCIATION OF AMERICA,
233 Fulton St., New York City.

When writing, please mention "Modern Electrics."


DON'T FORGET

That commencing with the April number,
Modern Electrics

will be **15c.** per copy and contain at least 128 pages, with many new valuable features and more articles. Better printed, on better paper and double the size of heretofore.

We have no hesitancy in saying that it will be the best 15c. magazine of its kind published. You have yet time to send in your subscription from one to five years at the old rate of \$1.00 per year in the United States. **Don't turn this page** without sending it in; you may forget it.

When writing, please mention "Modern Electrics."

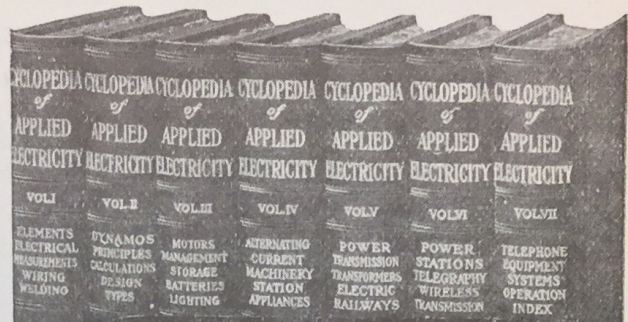

Seven Big Volumes of Electrical Knowledge

This is the greatest electrical reference library, for the expert and student. These books are published especially for the ambitious man who is training himself for advancement—for the wide-awake man who is likely to be called upon for work outside of his regular line—for the man who needs at his elbow, for ready reference, an accurate down-to-date work on Electricity. Seven volumes, 2,200 pages with over 2,600 full-page illustrations, diagrams, formulas, etc., printed in large, clear type on special quality paper.

Sent Absolutely Free — Express Prepaid

The complete seven volumes, not a sample volume, will be sent, express prepaid, for seven days' free examination; returnable at our expense, if the books do not contain the information you want. If you keep the books, pay \$1.80 seven days after receipt and then \$2.00 a month until you have paid the special introductory price of \$19.80. The Table of Contents below will give you some idea of the tremendous scope of the work—but only an examination of the books will reveal their full value to you.

Just fill in and mail the coupon. It won't cost you a cent to examine the books. We know they'll be worth many times their cost to you. Mail the coupon now before the busy season begins and you will receive your books promptly.

What You Can Learn From This Great Book

Theory—Calculation, Design and Construction of Generators and Motors—
Electrical Measurements—Electrical Wiring—Electric Welding—Types of
Generators and Motors—Management of Generators and Motors—
Storage Batteries—Electric Lighting—Alternating-Current Machinery—
Station Appliances—Power Stations—Power Transmission—Central
Station Engineering—Electric Railways, including Single-Phase—The
Electric Telegraph—Telephone Equipment, Systems and Operation—
Wireless Telegraph and Telephone—Telautograph, Telegraphone, etc.

**Free with every order
received before March 1st, 1912**

With every set is included a year's Consulting Membership entitling you to the advice of our business and engineering experts free. This will give you practical help in handling working problems which are too specific to be taken up in detail in the encyclopedia. There will be no limit to this service. A single problem solved for you might be worth more than the first cost of the books.

**American School of
Correspondence**

**Chicago,
U. S. A.**

M. E.
2-12

A. S. of C.

Please send me
Encyclopedia of Applied
Electricity for
seven days' free exam-
ination. I will send \$1.80
within seven days and \$2
a month until I have paid
\$19.80; otherwise I will notify
you and hold the books subject
to your order. Title not to pass
until fully paid.

7 Day Examination Coupon

NAME

ADDRESS

OCCUPATION

EMPLOYER

When writing, please mention "Modern Electrics."

PATENTS DESIGNS TRADE MARKS and COPYRIGHTS

Secured and Negotiated in United States and
All Foreign Countries,

DON'T NEGLECT YOUR INVENTION

Send us a drawing or pencil sketch of your idea and we
will give you an opinion as to its patentability free of
charge. . . . DON'T DELAY.


SEND FOR FREE BOOK

WILLIAMSON & WILLIAMSON

1325-A ARCH ST., PHILADELPHIA, PA.

When writing, please mention "Modern Electrics."

Faucet WATER MOTOR



Complete with mery wheel \$2.50
buff wheel, pulley to run
sewing and washing machine, pol-
ish. In some cities where we have
no agents, and where the water
pressure is good, a sample motor will
be given free; apply at once if
you want to make some extra
money, or if you can devote
your whole time, liberal salary and
commission will be paid.

ALCOHOL STOVES, LAMPS
AND FLAT IRONS

ENGINEERS WANTED to send for catalog of in-
dicators, Reducing Wheels Planimeters. Address,

LIPPINCOTT M. S. CO.

52 Columbia St.,

Newark

New Jersey

C. Q. D.

C. Q. D.

C. Q. D.

STOCKS WANTED.

50 Eng. Marconi pf.
125 Canadian Marconi.
30 Eng. Marconi com.
70 American Marconi.
50 Rastbrook.

25 A. D. S.
5 Gary Interurban.
25 Oxford Linen Co.
1 Intern. Lumber.
12. Chi. Air Line pf.

STOCKS FOR SALE.

400 Autopress pf.
20 American Marconi.
75 Eng. Marconi pf.
300 Am. Tele. Type.
150 Am. Telegraphone.
32 C. N. Y. El. Air Line.
13 Oxford Linen A.

45 Oxford Linen B.
50 Oxford Linen C.
40 Canadian Marconi.
Telepost Series A.
Telepost Series B.
Telepost Series C.
10 Funding Co. of Am.


ENGLISH MARCONI COMMON (delayed delivery)
SOLD ON EASY MONTHLY PAYMENTS
Send for our Wireless Quotation Sheet.

P. C. KULLMAN & CO.

THE WIRELESS BROKERAGE HOUSE.
Tel. 4047-4048—John.
68 Wall St., New York.

When writing, please mention "Modern Electrics."

TRY IT

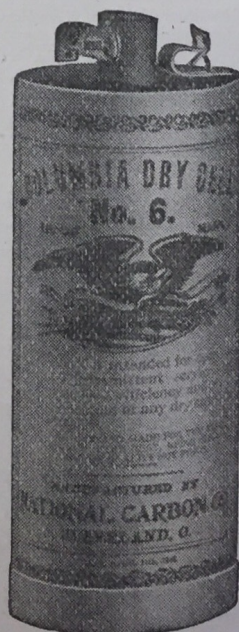

COLUMBIA DRY CELL

Only one trial is
necessary to con-
vince you that this
cell will live long-
er, cost less and
give better service
than any other
brand.

Its long life and
strong current
make it specially
adapted to work
on telephones,
bells, buzzers,
electric clocks and
toys, wireless tele-
graph instruments,
gas lighters, elec-
tric horns and
many other simi-
lar devices.

Ask your dealer.

NATIONAL CARBON CO.,

Cleveland
Sixth City

CLEVELAND, O.

When writing, please mention "Modern Electrics."

BUSINESS

The Greatest Game in the World and The Most Powerful Magazine

BUSINESS is a magazine of which it has been said: "Once a subscriber—always one." A letter has just been received from Mr. C. C. Jewell, of Ventura, Calif., from which we quote verbatim as follows:

"THE inspiring articles running from month to month in your magazine have been a great help to me, and have helped me to rise from the ranks of bookkeeper to my present position of Manager, and I would not be without the magazine for many times the subscription price."
WHAT could be a more dignified or worthy life's work than introducing into every office, store and factory in the land this great magazine—this medium of great influence—this powerful factor in the business world—which can do as much for each and every other Reader as it has done for Mr. Jewell. And besides being exceedingly pleasant work—it is *mighty profitable*. Our commissions are most liberal. Write today for free explanation of our plans for Special Representatives.

J. H. LYTLE, Sales Manager

THE BUSINESS MAN'S PUBLISHING COMPANY
DETROIT, MICH.

When writing, please mention "Modern Electrics."

A WONDERFUL TYPEWRITER



The Fox is indeed "A Wonderful Typewriter" because it will do all—and more—than any other typewriter, and do it easier and better. The Fox has a lighter touch and action than any other typewriter built and is full automatic. It is easy to make advertising claims of superiority, but we will prove our claims by sending to anyone, anywhere, one of our typewriters on ten days' free trial—**express prepaid**—the typewriter to be returned at our expense if it does not prove satisfactory.

Send today for a catalog with prices. Select from this the model wanted, width of carriage, style of type, etc., and a typewriter, put up just as you want it, will be sent you for trial. After trial if the typewriter is perfectly satisfactory you can pay us a little down and the balance monthly, or in all cash, as you prefer. Write today—use the coupon.



FOX COUPON

Date _____

Fox Typewriter Co.,
7202-7502 Front St.,
Grand Rapids, Mich.

DEAR SIR: Please send catalog and prices.

Name _____

Address _____

Business _____

Oh-You Fox!

When writing, please mention "Modern Electrics."

ENGINEERS' BULLETIN

THOS. F. MYERS, M. E., Editor

Edited by director and chief instructor of MASSACHUSETTS SCHOOL OF ENGINEERING, and founder of the famous MYERS SYSTEM of instruction. 1300 successful graduates in 6 years. This system is carried out in the BULLETIN. Questions and Answers appearing each month, aiding our readers to pass Examining Board. Indicator Talks, a series of instructions given in each edition showing several diagrams and use of instruments. Many other valuable articles written in plain language, catering to steam and mechanical engineers, electricians, machinists, steam fitters, etc.

50 cents per year. Send 2-cent stamp for sample copy.

ENGINEERS' BULLETIN,
26 Austin St., Worcester, Mass.

BOYS

Closed

Be the First in Your Town
to Own a "BULLET" Knife

Made from genuine Krag-Jorgensen army rifle cartridge, strong and durable, with keen blade made from selected steel.

Special Offer: We will send you *The Boys' Magazine* for six months, "Fifty Ways for Boys to Earn Money" [a very practical book] and this "Bullet" Knife, for 50c. *The Boys' Magazine*, edited by Walter Camp, is the finest magazine in the world for boys. Filled with fascinating stories and instructive articles. Handsome colored covers and beautifully illustrated throughout. Departments devoted to Boy Scouts, Electricity, Mechanics, Athletics, Photography, Carpentry, Stamps and Coins. *Satisfaction, or money refunded. Order today.* The Scott F. Redfield Co., 740 Main St., Smethport, Pa.

THE BOYS' MAGAZINE, at all news-stands, 10 cents a copy.

Open


Half actual size

Send 50 cents, coin or stamps for a six months trial subscription to **IGNITION**—the big new monthly magazine specializing on automobile, motor, gas and gasoline engine troubles. Carefully and practically edited by experts; profusely illustrated; handsomely printed. Helpful from cover to cover. Address, **IGNITION**, 1457 Monadnock Bldg., Chicago, Ill.

NOTE—Several back numbers free, if you do it NOW



JUST



ONE MOMENT, PLEASE

If you are interested in Picture Taking, you can keep posted on all matters relating to photography by subscribing to

PHOTOGRAPHIC TOPICS

the lowest priced photographic monthly.

30 CENTS PER YEAR

Timely Hints.
Latest Wrinkles.

Subscribe Now.
Sample Copy Free.

PHOTOGRAPHIC TOPICS

147 Fulton Street

New York, N. Y.

THE EDITOR

The Journal of Information for Literary Workers, is a Magazine which helps writers to sell their stories, articles and poems.

If you are a writer, whether or not you are selling your manuscripts, you need **THE EDITOR**. It offers the inspiration and suggestion which will lead to the production and sale of more and better manuscripts. Jack London, Crittenden Marriott, Peter Clark Macfarlane, and other well-known and successful writers commend **THE EDITOR** for the help it has given them. **THE EDITOR** publishes all the news of all the magazines which purchase manuscripts.

\$1.00 a Year. 15 Cents a Copy

THE EDITOR COMPANY
Box E, Ridgewood, N. J.

When writing, please mention "Modern Electrics."

THE MODEL ENGINEER AND ELECTRICIAN

Edited by Percival Marshall, A. I. Mech. E.
Published weekly at London, Eng.

The paper which tells you how to make model locomotives, steam and gas engines, aeroplanes, motor cycles, boats, dynamos, motors, coils, batteries, wireless apparatus, and everything mechanical and electrical. Just the paper for the man or boy with a workshop. It is written by experts, and is read by scientific amateurs and professional mechanics and electricians all over the world. It has thirteen years' reputation for high-grade instruction in the theory and practice of small power engineering.

Every issue is fully illustrated.


Single copies 8 cents. Annual subscription three dollars postpaid.

Sole Agents for U. S. A. and Canada.

SPON & CHAMBERLAIN
123 Liberty Street
NEW YORK

When writing, please mention "Modern Electrics."

SEND FOR THE T Y C O B B

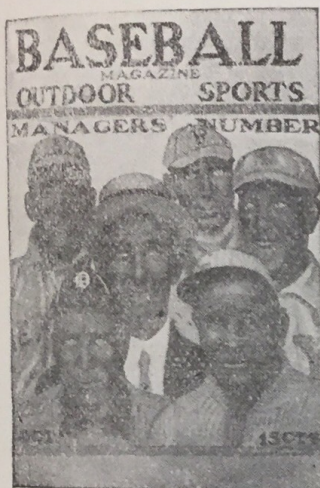

SPECIAL ISSUE OF BASEBALL Magazine

You may *THINK* you know "inside" Baseball. If you don't read the Baseball Magazine regularly, there is a lot about Baseball you don't know, but which every *FAN* should know.


Send 25 cents for Sample Copy and get a handsome art photogravure poster of "Home Run" Baker.
Size, 20 x 11 inches.

15c. ALL-NEWSSTANDS

BASEBALL MAGAZINE CO., Boston, Mass.

When writing, please mention "Modern Electrics."

A \$1.00 Safety Razor FREE!

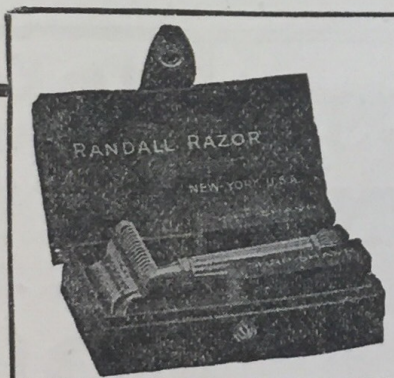

This RANDALL SAFETY RAZOR which retails regularly at \$1.00, consists of:—

The Randall Razor Frame which is made of brass, heavily nickel-plated.

Twelve Blades given FREE with each set, represent the highest perfection in manufacturing, being made of the highest tempered steel, skillfully ground and honed to the keenest edge.

The Case is almost identical to those supplied with the standard safety razors sold at higher prices. It is of chase leather, with a special fastening device to lock it, and is lined with a rich plush.

This Combination has created what is to-day recognized as the simplest, most useful and practical safety razor yet devised irrespective of price, and is given with the **IRON CLAD GUARANTEE** that if it does not give satisfaction in every respect your money will be refunded without a word.

This Razor Given Absolutely FREE
with Two Years' Subscription to
MODERN ELECTRICS

WITH TWO YEARS' SUBSCRIPTION
TO MODERN ELECTRICS


You Save 100%

RANDALL SAFETY RAZOR and 12 blades, \$1.00
MODERN ELECTRICS, two years . . . 3.00

Total . \$4.00

Our "GET ACQUAINTED" Offer, both for 2.00

SAVING \$2.00

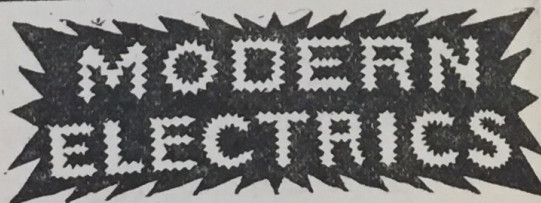

"THE ELECTRICAL MAGAZINE FOR EVERYBODY."

The Brightest and Most Interesting Electrical Magazine Published. With New Departments on "Aeronautics" and "With the Inventor," NEARLY FIVE YEARS OLD. Containing 96 to 128 pages monthly, written in a popular style to interest and to be understood by everybody. The Magazine to Read if you want to keep up to date on Wireless and progress in electricity. **ACCEPT NOW this unusual offer and mail coupon TO-DAY.** Add 16c. for mailing and packing razor.

15c
per Copy
\$1.50
per Year
SOLD ON
NEWSSTANDS

MODERN ELECTRICS, 233 Fulton St., New York, N. Y.
Enclosed find \$2.16 (cash, stamps or M. O.), for which send me prepaid one Standard Randall Safety Razor on terms described in this advertisement and Modern Electrics for two years to the address below.

Name.....

Street.....

City and State.....

Note---For N. Y., City or Canada add 35c.; Foreign, 60c.

When writing, please mention "Modern Electrics."

THE GREATEST CONTEST

EVER INAUGURATED BY A
MASONIC MAGAZINE
FOR NEW
SUBSCRIPTIONS

FREE A Five Passenger Automobile, Two (2) Gold Watches, a Diamond Ring, a Standard Typewriter, a Bicycle, and many other handsome Prizes will be given away by The New Age Magazine as rewards to Agents for new subscriptions during the present year.

If you are a Master Mason, or the Mother, Wife, Widow, Sister, Daughter or Son of a Master Mason, write to-day for full particulars. Address Circulation Department.

THE NEW AGE MAGAZINE

No. 1 MADISON AVE.

NEW YORK CITY, N. Y.

When writing, please mention "Modern Electrics."

DUFFY'S MAGAZINE

AND

PACIFIC COAST GUIDE

A complete guide to Pacific Coast, an illustrated magazine of the Panama Pacific Exposition. Showing all the details and progress of this great work.

A complete illustration of all the great features of the Exposition.

To keep posted on California and the great Panama Pacific Exposition, subscribe for Duffy's Magazine. \$1.00 per year.

DUFFY'S MAGAZINE CO.

350 Sansome St.
SAN FRANCISCO

When writing, please mention "Modern Electrics."

Do You Want to Talk

to thousands of wide-awake and alert business men each month?

Would you like to tell them what you make?

Would you like to have them help you find THAT man or material you want in your business?

Would you like to get inquiries at the lowest possible cost? Here's the way—through the Classified Columns of

BUSINESS

(THE MAGAZINE FOR OFFICE STORE AND FACTORY)

The Classified pages of this publication will bring you high class inquiries. BUSINESS readers are not curiosity seekers. Every reply you get is half a sale.

Headings such as Help Wanted, Business Opportunities, Agents Wanted, Letter Specialists, Investments, Coins, Collections, Typewriters, Patent Attorneys, Printing, Salesmen Wanted, Etc.

Why not begin NOW and talk to these thousands of men each month. The cost is but 75c a line; not less than 6 lines accepted.

Send Copy and Order to

**THE CLASSIFIED DEPARTMENT
OF BUSINESS**

The Business Man's Publishing Co., Ltd.
DETROIT, MICH.

When writing, please mention "Modern Electrics."

Four Extraordinary Offers

To make this our banner subscription month, we are willing to make the following **FOUR WONDERFUL OFFERS**. Frankly, we would like to see your name appear among the 55,000 readers, who are now regular subscribers to MODERN ELECTRICS, and in order to do so, are willing to go to an **EXTRAORDINARY EXPENSE** never before attempted by any magazine.

OFFER No. 1.

Send us \$1.00 cash, stamps, or money order, and in return, we will send you:

1--Modern Electrics for one year (next issue free)	\$1.50
2--Book, How to Make Wireless Instruments, cost	.25
3--Book, The Wireless Telephone, by H. Gernsback, cost	.25
4--Book, Construction of Induction Coils and Transformers, by H. W. Secor, cost	.25
Total	\$2.25

(If books are to be mailed add 6c. postage)

Total Net Saving, \$1.25

OFFER No. 3.

Send us \$1.00 cash, stamps, or money order, and in return, we will send you:

1--Modern Electrics for one year (next issue free)	\$1.50
2--Linen Binder (automatic) holds 12 issues M. E., gold stamped	.50
3--Any one of the three books shown in offer No. 1	.25
Total	\$2.25

(Mail charges for items 2 and 3, 15c. extra)

Total Net Saving, \$1.25

GREAT WIRELESS OFFER No. 2.

Send us \$1.00 cash, stamps, or money order, and in return, we will send you:

1--Modern Electrics for one year (next issue free)	\$1.50
2--Wireless Code Chart, cardboard, size 9x12 in., Morse, Navy and Continental codes	.10
3--Wireless Chart with 20 Wireless Standard "Hook-Ups"	.10
4--Join the Wireless Association of America, and Wireless Pin	.20
5--Official Wireless Blue Book, 32 pages, and 13x10 in. chart of U. S. stations	.15
6--Any one of the three books shown in offer No. 1	.25
Total	\$2.30

(Mail charges for Items 2, 3, 4, 5, 6, 8c. extra)

Total Net Saving, \$1.30

OFFER No. 4.

Send us \$1.00 cash, stamps, or money order and in return we will send you:

1--Modern Electrics for one year (next issue free)	\$1.50
2--Twelve Back Numbers of Modern Electrics, all consecutive numbers, all in good condition, each 10c.	1.20
Total	\$2.70

(No mail charges necessary)

Total Net Saving, \$1.70

The offers as shown must not be changed nor can articles from any one offer be exchanged with any article of another offer. The selection is quite complete and we are positive that you will find a suitable offer among the four. **IMPORTANT:** For Manhattan and Canada, add 35c; Foreign, 60c.

MODERN ELECTRICS, 233 Fulton St., New York, N. Y.

When writing, please mention "Modern Electrics."

LISTEN, Mr. READER

INCREASE YOUR EARNING POWER!

Do you know that the electrical industries are expanding to such an extent that hundreds of electrical men are desired to take responsible positions at this very minute. Do you further realize that all practical men started from the bottom. You can follow them if you follow their methods.

For \$1.00 you can secure a two-year subscription to **SOUTHERN ELECTRICIAN** and receive over one thousand pages of vital information on the design, operation and maintenance of electrical equipment and electrical systems.

If you will preserve these issues you will have a collection of practical information and data that you cannot find in text books nor buy from any one electrical man at any price, because he has not had the experience the articles present. Whether or not you are in the operating or installation field secure a subscription and keep up to date on electrical matters. Fill in the coupon and enclose a paper dollar at our risk.

SOUTHERN ELECTRICIAN
GRANT BUILDING
ATLANTA, GA.


Enclosed find \$1.00 for a two years' subscription to SOUTHERN ELECTRICIAN.

Name _____

Address _____

When writing, please mention "Modern Electrics."

THE GREAT HOME PIANO OF AMERICA

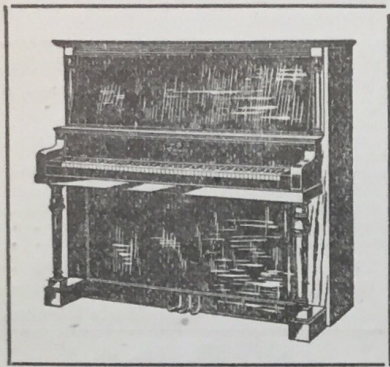

COLONIAL MODEL

CONWAY BOSTON MADE

NO need for the home to be longer without a piano. This handsome Conway is sold for \$300, and certainly there is no equal in the world at this price.

HANDSOME mahogany case, sweet, deep, rich singing tone, will last a lifetime.

THERE are thousands and thousands of these pianos in America's best homes. Our monthly terms make it very easy to own one of these pianos.

SPECIAL OFFER

WE have a special offer to make to readers of this magazine which will help pay for your piano. Don't fail to write for it. Fill out coupon and send in.

COUPON

HALLET & DAVIS PIANO CO.
BOSTON:

Please send me free, Conway catalogs and prices and your special offer.

Name

Address


HALLET & DAVIS PIANO CO.
FACTORY DISTRIBUTORS
CONWAY PIANOS
146 BOYLSTON ST. BOSTON
Sold by Best Dealers Everywhere

These are a Few of Our Specialties

CHRISTMAS TREE
DECORATIVE OUTFITS
MULTIPLE LAMPS.



FRUIT, FLOWER &
FIGURE LAMPS.
SCARF PINS.




MINIATURE
TUNGSTEN LAMPS.

NOVELTY
DRY BATTERIES.
CARBON BATTERY
LAMPS.



FLASHLIGHTS.
MINERS' LIGHTS.



Write for Catalogue and Name of Dealer
in your City.

Franco-American Electric Novelty Co.

MANUFACTURERS AND IMPORTERS

83 CHAMBERS STREET, NEW YORK

160 NORTH FIFTH AVENUE, CHICAGO

When writing, please mention "Modern Electrics."

IMPORTANT

*If you live in or near
the State of New York
or New Jersey, you can
earn from \$10.00 to
\$1000 on each sale of
the goods I have to
offer. No technical
knowledge or exper-
ience required.*

Write TODAY for Particulars



FRED A. MORRISON

253 BROADWAY, N. Y. CITY


When writing, please mention "Modern Electrics."

Electric Novelties

Electric Christmas Tree Outfits.
Flash Lights.
Miniature
Tungsten
Lamps.
Ornamental
Electric Plants.
Electric
Trains, Etc.

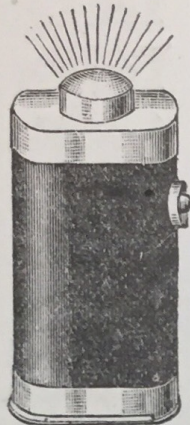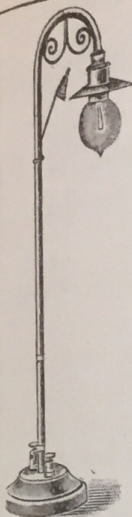

We are the oldest firm in New York in the electrical novelty line, and we can supply all your wants.

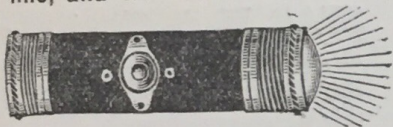

Send at once for our new large 40-page illustrated catalogue. A postal will bring it.

ALFRED WOLFF & CO.

29-31 Park Place New York City 170 W. Randolph St. Chicago, Ill.

WHOLESALE ONLY

When writing, please mention "Modern Electrics."

INSULATES and REPAIRS

POTMEND

is a newly invented white powder, which, when mixed with water, forms an adhering porcelain substance as hard as stone and affording perfect insulation. With POTMEND you can instantly repair your insulators, plug up holes, or use it as an insulator where large china or glass pieces are impractical.



In a thousand ways POTMEND is indispensable for the electrical worker, whether in laboratory or outside work.

POTMEND is simply applied. Add a few drops of water, let stand and apply. The powder becomes very hard and is in effect perfect porcelain when dry.

It will mend anything—porcelain, glass, china, wood or metal, and the article will be as strong as when new. Unaffected by electrolysis, intense heat or acids. With a can of POTMEND at hand you can defy accidents to materials or tools, relying on POTMEND'S perfect insulation and wonderful adhering power.

Small Can, 15 Cents.
Factory Size Can, \$1.00 Postpaid.

The most useful invention for the electrical worker of this century. If your supply man does not keep it, send at once for a small can and test it.

POTMEND COMPANY

Dept. 3. 529 HUDSON STREET New York City

When writing, please mention "Modern Electrics."



5754

Apprentices and Laborers Have Become

628 Draftsmen	402 Firemen	700 Engineers	297 Foremen
1381 Electricians and Mechanics	501 Proprietors and Supts.	1845 Other Occupations	

Through I. C. S. Training

Five Thousand Seven Hundred Fifty-Four Apprentices and Laborers have voluntarily written to us that the International Correspondence Schools opened to them the door to increased pay, promotion, and prosperity in new positions and occupations. This is the very best evidence of results accomplished by I. C. S. students.

These men are making their spare time increase their wages, build homes, and win independence. If you are not one of them, you are neglecting a great opportunity—neglecting your duty to yourself and those dependent upon you.

The I. C. S. have taken thousands upon thousands of men and fitted them for larger and better-paying positions. What we have done for others, we can do for you. I. C. S. Courses are adapted to meet your particular need, for by a Course you can rise to a larger and more prosperous career.

Mark and mail the coupon. It will bring to you, without cost or obligation, full information about the promotion you wish to secure.

Send the Coupon NOW

International Correspondence Schools
Box 992, Scranton, Pa.

Please explain, without further obligation on my part, how I can qualify for a larger salary and advancement to the position, trade, or profession before which I have marked X.

Electrical Engineering	Mechanical Engineer
Electric Lighting	Mechanical Draftsman
Electric Railways	R. R. Constructing
Electrician	Concrete Construction
Electric Car Running	Architect
Dynamo Foreman	Contracting and Build'g
Dynamo Tender	Architectural Draftsman
Wireman	Plumbing & Heating
Mining Engineer	Chemist
Telephone Expert	Bookkeeper
Civil Engineer	Advertising Man
Automobile Running	Civil Service Exams.


Name _____
St. & No. _____ State _____
City _____
Present Occupation _____

When writing, please mention "Modern Electrics."

You Can't Go Wrong When You Buy A STAR. There Are Five Reasons Why.



STAR Safety Razor

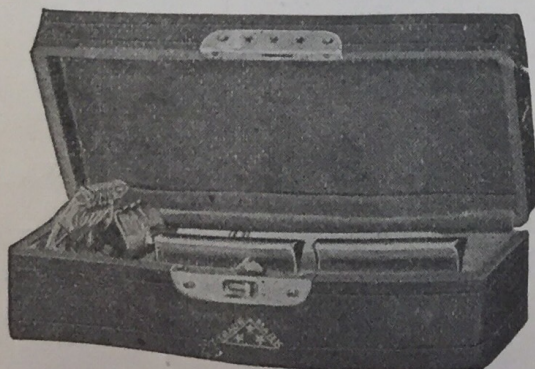

1. **STAR Blades** are forged from the finest Sheffield steel. They are hand made and *individually* made throughout. You can't get a better blade. They take a marvelously keen edge—and keep it. Many STAR blades have been used constantly for over twenty years.
2. **STAR Blade Clip** is self-adjusting. It insures *always* perfect alignment of the blade. No other safety razor has this necessary device.
3. **STAR Lather Cup** affords ample room for the accumulation of lather while shaving. If you have ever used the ordinary safety razor you know the convenience this means.
4. **STAR Frame Hinges** make cleaning easy and quick. Fingers are not plastered with lather. Razor is always clean. Simply turn back the frame and run water through it. Then snap into place again.
5. **STAR Guarantee** means that if you are not satisfied with a STAR you purchase, you can send it direct to us and have it replaced or your money refunded, as you wish. You take no risk when you buy. The STAR *must* make good.

If your dealer doesn't sell the STAR, write us

PRICE, AS
ILLUSTRATED **\$3.75**


Other Styles from \$1.50 to \$20.

KAMPFE BROTHERS
8-12 Reade St.
New York City



LEARN *by* DOING

THAT'S THE WAY
HERE

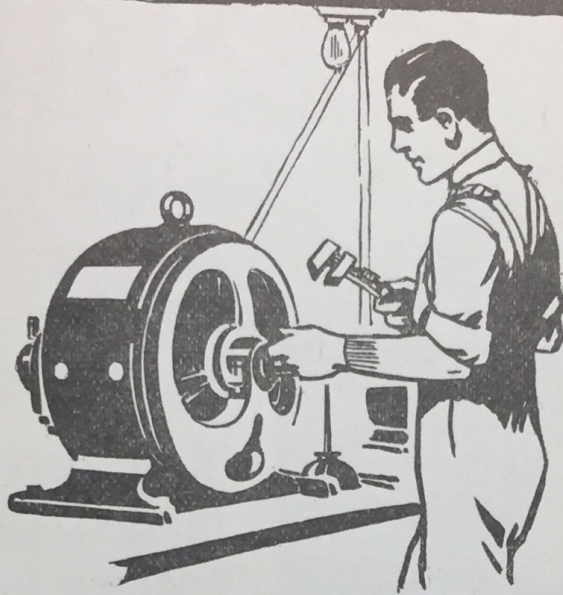

You learn **ELECTRICITY** in all its modern applied forms by **DOING**—not by theory from books. You are taught by “this is the way to do it” Teachers and then you work it out with your own hands right in the school. And what you learn, you know “for keeps.”

No classes. You get individual instruction and go ahead without hindrance. Day and night sessions the year 'round.

Fill out the coupon and receive our illustrated prospectus free, telling of our practical course and easy payment plan.

The New York Electrical School

26 WEST 17th STREET

OPEN FROM 9 A. M. TO 9 P. M.

NOT A CORRESPONDENCE SCHOOL


The New York Electrical School
26 West 17th Street, New York

Please send me full information about your
course in **ELECTRICITY**.

NAME.....

ADDRESS.....

ENERGY

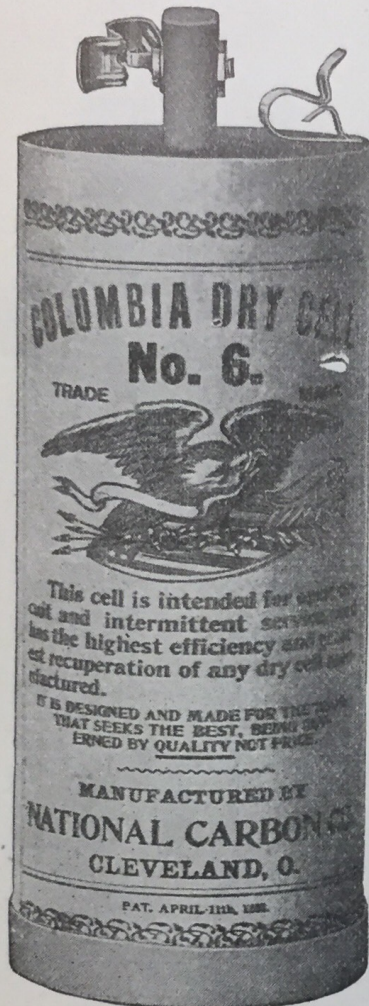

When you buy a dry cell you get energy only. All that is left after this energy is used in the form of work, is junk to you.

You care not how the cell is made so long as you get the best bargain for your money.

To be safe in your buy you should get the cell with a record, a history, a national prestige on account of long satisfaction rendered the masses who use cells.

This will lead you to

COLUMBIA

the best buy in dry cells known.

It is the embodiment of energy and perfection in makeup. It has led the battery market for nearly a quarter century and still leads all others.

Only quality and reliability can hold this coveted place. Columbia has held it because of its vastly superior quality.

NATIONAL CARBON

ENERGY

Adaptability of COLUMBIA DRY CELL

The open circuit brand of this cell is specially made for all forms of work where the cell is in service for short periods only, and the time intervening is long.

A light drain cell that holds its life and strength in idleness is necessary. Columbia is made for such work. It exactly fills the bill.

Among the instruments or equipment demanding Columbia quality cells are telephones, door bells, signals of all kinds, and other similar devices.


COLUMBIA IGNITOR is different. It is an ignition cell made particularly for automobiles, motor boats, gas engines, etc. Here the work is strenuous and continuous. The cell must hold up for long periods and recuperate thoroughly afterward. Columbia Ignitor is an ideal cell for this work. It is reliable, efficient, best.

— TO DEALERS —

If you are not handling these brands of cells, get in touch with your jobber or with us for prices and evidence of superior quality. We are willing to back our statements in a substantial way.

— TO CONSUMERS —

Get Columbia brand cells from your dealer. If he does not handle them, he should. Send us his name and we will try to help you make it easy for you to get Columbia in future.

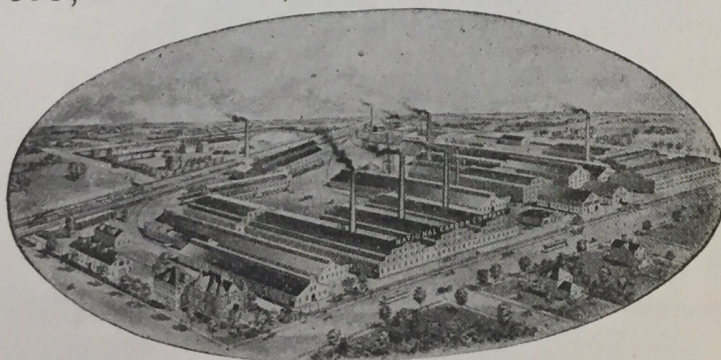

The mammoth factory at Cleveland, where Columbia Cells are made. It is the largest, most modern, most complete battery factory in the world. Covers 30 acres.

COMPANY, Cleveland
Sixth City

SHARPEN TOOLS

No Money Needed! No Promises! No Red Tape!

HERE is a tool grinder that will save time, money and work for every mechanic, carpenter, shop, factory and tool user. Prove it yourself. You can try this complete 14 attachment shop outfit for 30 days absolutely free. Do all the grinding you wish, use it to sharpen up your twist drills, saws, plane bits, chisels—every tool you have. See how amazingly quick and easy it is to make the dullest, most battered tool you can find as keen and bright as new. Use it free for 30 days, and then if you wish, send it back at our expense.




JIG SAW



LATHE AND SAW



SAW
OUTFIT



BORING
ATTACHMENT

A Workshop in Itself

Besides the sharpening attachments which are included in the sharpening outfits, there are 16 other attachments from which you can select what you want. In this way you can secure a turning lathe, drill circle saws, jig saws, large metal polisher, etc.—17 in all—simply by getting these attachments to go on your "Hummer" Grinder.

If you were to purchase machines to do the same work that these attachments will do, it would cost a good deal, but by getting these attachments for your grinder you can completely equip your workshop at amazingly small cost. Our Free Book describes all attachments.

"DIMO-GRIT" Sharpening Stones

Ask your dealer for Dimo-Grit sharpening stones, the fastest and smoothest cutting sharpening stones in the market—look for the name "Dimo-Grit" on the stone.

Luther


**25 Times Faster than the Grindstone
10 Times More Efficient than Emery**

DIMO-GRIT is the new artificial diamond abrasive. It is made in the wonderful electrical furnaces at Niagara Falls, the hottest furnaces in the world, the terrific heat of which fuses the elements of real diamonds **INTO DIMO-GRIT CRYSTALS**—as hard as genuine South African diamonds. Dimo-Grit peels steel away in tiny shavings—no heat developed, no need of water cooling, no danger of drawing temper. Dimo-Grit is especially suitable for steel, leaving the smoothest, keenest edge. Carborundum wheels also furnished.

FREE

Engine and Foot Power

THE LUTHER shop outfit meets every grinding, sharpening and polishing need for the shop or individual tool-user. The machine and wheels are guaranteed for five years. Dimo-Grit wheels will not glaze, fill up, or wear lopsided. The shop grinder is built all of steel and iron, and is absolutely rigid—no troublesome chains to catch the particles from the grinding wheels and grind the chain to pieces—it has bevel gear shaft drive like an automobile, dust proof bearings, gravity lubrication. Patent tool rests and attachments enable apprentice to sharpen twist drills, planes, bits, etc., as well as any high paid mechanic.

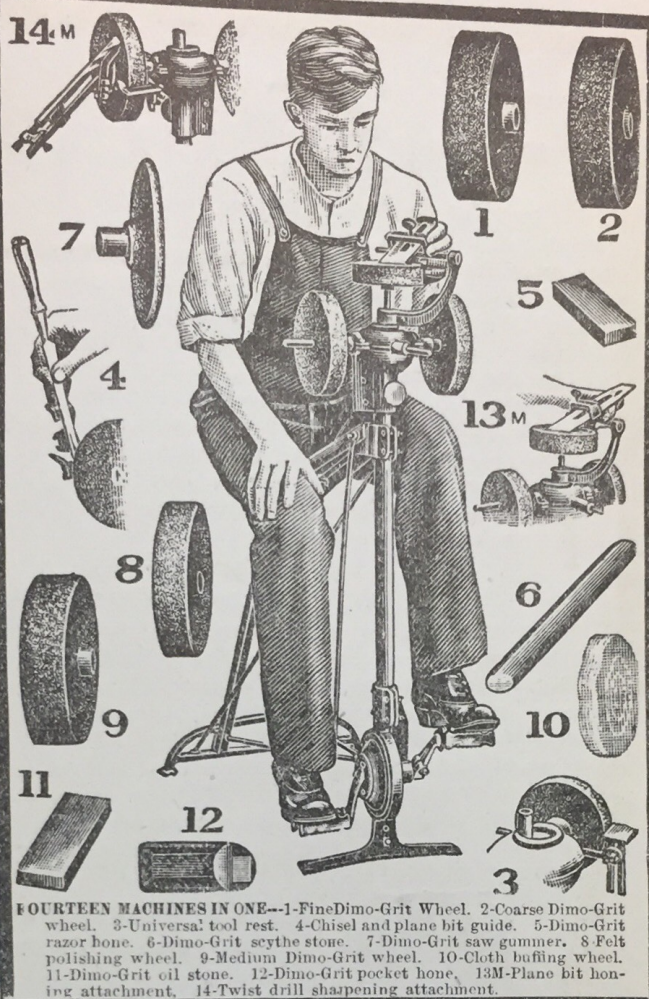

Shop Tool Grinder

Forty Page Free Book

TELLS the full story of the discovery of artificial diamond abrasives as it appeared in McClure's Magazine. Dimo-Grit wheels outwear any number of emery wheels, saving that much money. Dimo-Grit saves tools and time; another big saving of money. Makes the work go faster and easier. Send back this coupon to-day, get this interesting free book, and then decide if you want us to send you the complete shop outfit for 30 days free trial.

Luther Grinder Mfg. Co.

299 MICHIGAN STREET
MILWAUKEE
WIS.

RETURN
THIS COUPON
TODAY

LUTHER GRINDER MFG. CO.
299 Michigan St., Milwaukee, Wis.

At no cost or obligation to me, please send your 40 page free book, special introductory prices, and 30 days free trial offer.

NAME

ADDRESS

COUPON

The NATIONAL SPORTSMAN

Is a monthly magazine for lovers of Sport with Rod, Dog, Rifle or Gun


It treats of the things you love best—field, wood, stream, song of reel, crack of rifle, and the joyful, restful things of true camp life. It is the great Stop Worry magazine of America, lures you away from the grind of work, puts new life in you and shows you the happiness of the Great Right Way. To read the National Sportsman is to live all the year in the glorious open—twelve delightful trips of fishing, hunting, camping, tramping, in pleasant companionship with the blazers of the way. Among our big brotherhood bunch of over one hundred thousand subscribers the National Sportsman is fondly known as "Head Camp"—just like a big camp in the woods where good fellows gather around the fire smoking their pipes and spinning stirring tales. Fortunate is he who can break away for a brief outing each year, but the contents of the National Sportsman each month will keep your heart warm and red blood a-sizzling All the Time. Come, brother, draw up around the fire, light up and enjoy yourself. Join our bunch now by sending us a dollar for a year's subscription by return mail. The invite is up to you. Our fellows are waiting for you.

DO YOU KNOW?

ARE YOU IN DOUBT?

The National Sportsman Will Help You

With its 160 pages a month, crammed full of stories of outdoor sport and adventure, actual experiences of true sportsmen, and abundantly illustrated with pictures from life, each issue of the National Sportsman is a complete library of practical information—nearly two thousand pages a year! Through its pages thousands of fishermen, hunters, campers, canoeists have learned where and how to secure the best of sport and the kind of equipment necessary. Besides, each subscriber has free use of our Information Bureau which will furnish upon request any sort of particular information he may desire. Any time you wish to know **HOW**, **WHEN** and **WHERE** to go with full particulars as to outfit needed the National Sportsman will gladly furnish the information you need entirely **FREE OF CHARGE** and with no obligation whatever on your part.

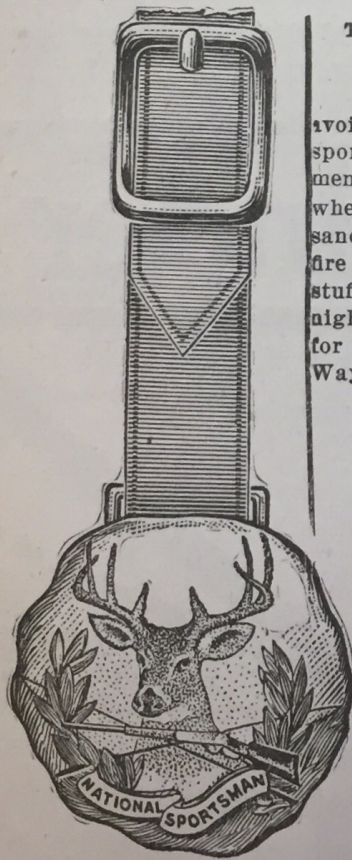

THE NATIONAL SPORTSMAN—THE SPORTSMAN'S BIBLE

Teaches the True Gospel of the Glorious Open

Instructs by most attractive means of story and picture how to avoid failures by studying the most successful methods of experienced sportsmen. Contents each month are a live and up-to-date commentary on all matters pertaining to Fishing, Hunting, Camping—when and where to go, selection and care of outfits; briefly, a thousand subjects of interest to sportsmen constantly undergoing rapid fire of intelligent discussion in every issue. It is brim full of rich stuff for red blood—the sort you will sit up to read if it takes all night to do it. It is the best literature in the world for man or boy, for it teaches you how to get the most out of life—The Great Right Way. Subscription Price \$1.00 a Year.

SPECIAL OFFER

Send us \$1.00, on receipt of which we will enter your name on our subscription list for one year, and send you by return mail one of our heavily burnished Ormolu Gold Watch Fobs (regular price 50 cents) as here shown, with russet leather strap and gold-plated buckle.

This fob answers the same purpose among sportsmen that a Masonic, Odd Fellow, Elk, or college emblem does in those fraternal orders. It serves as an easy and agreeable introduction among our readers and friends, which is the greatest outdoor sport fraternity in the world, one hundred thousand strong. When you see a man wearing one of these fobs, you will know he is going your way, hail fellow well met.

IT'S ALL YOURS FOR \$1.00

Fill in attached coupon and mail today

NATIONAL SPORTSMAN, 55 Federal St., Boston, Mass.

Enclosed find \$1.00 for a year's subscription to the NATIONAL SPORTSMAN, and a Watch Fob.

Name

Address


CASSELL'S CYCLOPÆDIA OF MECHANICS

6,500 ILLUSTRATIONS 30,000 INDEXED ARTICLES

Edited by
PAUL N. HASLACK

If You Want to Make Anything
Consult These Volumes

Assisted by
100 Practical Experts




For the Mechanical and
Electrical Engineer



For the Handy Man
About the House



For the Boy Who
Likes to Make Things

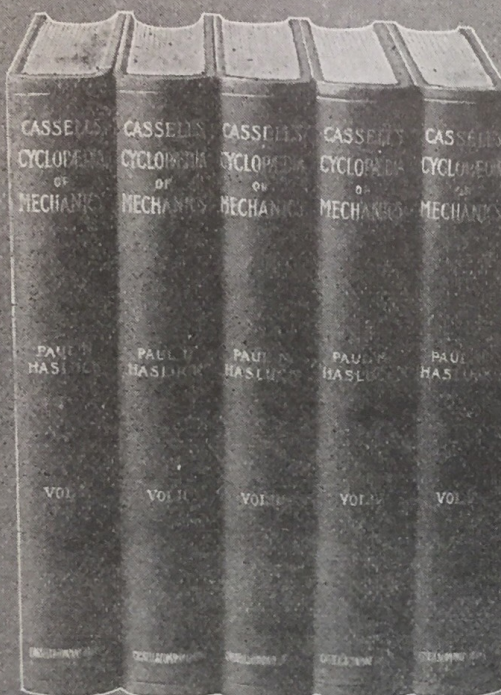

For the Practical
Shop Mechanic



For the Searcher
After Scientific Knowledge



For Every Man
with a Hobby

EVERY Mechanic, Engineer, Scientist, Farmer, Handyman and Man with a Hobby should own a set of these books. The work is not only of priceless value to Mechanics, Electricians and Scientists, but contains thousands of articles written for the Handyman about the house, farm and shop; for anyone who likes to make things, from a match-holder to a suite of furniture—from a wheelbarrow to a carriage or motor body. The boy who is learning how to use his brains and hands will find these volumes a never ending inspiration. Read the description below; then let us send you the set for examination before you purchase.

This Famous Mechanical Library Sent You for Examination on Receipt of \$1.00

Sign your name to the coupon below and let us send you this complete five volume work at once on approval. If you don't keep the books, the set is returnable AT OUR EXPENSE, and we will refund your \$1.00, plus any expenses.

Cassell's Cyclopaedia of Mechanics is an authoritative work, well printed and handsomely bound in five volumes. Written by a staff of skilful and talented mechanical and technical writers, under the direct editorship of Paul N. Hasluck, the foremost living writer on mechanical subjects, every item the paid contribution of an expert. The complete work contains over 6500 illustrations and 30,000 separately indexed articles; over 2,500,000 words. The five volumes number 1760 pages in all; each volume measuring 7½x10½ inches; strongly bound in stout extra durable cloth binding, with lettering in gold. We know you will be amazed by the scope and completeness of this work. A leisurely examination is the only method of sale that will do it justice. That is why we make you this out-and-out offer to place the five volumes in your home at our expense, without obligation to keep them unless you are satisfied.

For the Practical Mechanic The practical mechanic will find in this work thousands of articles such as: Spindle molder for motor connections; boiler covering compound; forging swivels; reducing high pressure of electric circuit; tail vice for wood-worker's bench; truing emery wheels; regulating speed of electric motors; tool for cutting round holes in sheet metal; tube ignition for small oil engine; oxy-acetylene blow pipe or torch for welding and cutting metals; rustless coating for iron patterns; uses of shunt coils; spacing dynamo brushes; heat gauge for use in hardening steel; fitting electro ignition to gas engine; grinding and polishing metals for a high finish; calculating weight of rolled metal, etc., etc.

Some General Subject-Headings which indicate the exceptional range and comprehensiveness of the work include: Acetylene—Acids—Alabaster—Alloys—Barometers—Boat Building—Bookbinding—Building—Cements—Chemicals and Chemistry—Cleaning and Renovating—Coach-building—Concrete—Cycles—Drawing Instruments—Dyeing—Electricity—Embossing—Enameling—Engineering—Engraving—Entomology—Etching—Explosives—Filters and Filtering—Fireproofing—Floors—Furnaces—Gas—Gauges—Gilding—Glass—Granite—Guns and Firearms—Heating—Apparatus—Illuminating—Inlaying—Ivory—Jewellers' Work—Lamps—Lantern Slides—Leather Working—Lenses—Lithography—Lubricating—Machinery—Marble—Metal Working—Metals and Metallurgy—Modelling—Motors—Moulding—Paints—Paper—Paving—Photography—Pipes—Plaster—Plumbing—Pottery—Poultry—Appliances—Presses—Printing—Pumps—Refining—Refrigeration—Roofing—Ropes—Sand—Sanitation—Saws—Screws—Surveying—Sign Writing—Soaps—Solder—Staircasing—Stone—Stoves—Tanning—Taxidermy—Terracotta—Tiling—Timber—Tools—Upholstery—Valves—Veneering—Water—Wireworking—Woodworking.

Examine This Great Set of Books at OUR Expense We want you to see this famous five volume work, for we know that you will be pleased with its binding, paper and printing, and the wonderful fund of information it contains. We want you to examine it thoroughly, for we know you will be quickly impressed with its practical value. The price of this complete work in five volumes as above described, is \$18.00. Just mail us the coupon opposite with \$1.00 and you will receive the set, carriage paid. Examine it five days. If at the end of that time you do not want it, notify us and hold subject to our order, and we agree to return the dollar you have sent us. If you keep the books, pay us \$1.00 within five days, and the balance \$2.00 a month until paid.

MODERN PUBLISHING CO.
233 Fulton Street, New York

2-12
M. P. Co.
233 Fulton St.
N. Y. C.

NAME.....
ADDRESS.....
OCCUPATION OR EMPLOYER.....
Send this coupon or copy of it

When writing, please mention "Modern Electrics."

SECOR



Permanent Alignment

Visible Writing

Positive Type Bar Control
—the "Why" of Permanent Alignment

Inbuilt Decimal Tabulator and Billing Device

Ribbon Feeds Only When Type Bars Move—A Great Saver of Ribbons

Removable and Reversible Platen

Type Protector on Each Type Bar

Complete Keyboard Control That Makes for Speed

Line Finder at Printing Point

Paragraphing Keys

Black Space Key

Automatically Reversed Two-Color Ribbon

Uniform, Light Touch

Fast Escapement

Automatically Adjusted Gear Driven Carriage


Removable Escapement

Independent and Flexible Paper Feed

The Secor Typewriter Company

General Sales Offices, 302-304 Broadway, New York
FACTORY AT DERBY, CONNECTICUT, U. S. A.

\$5.00 Per Month

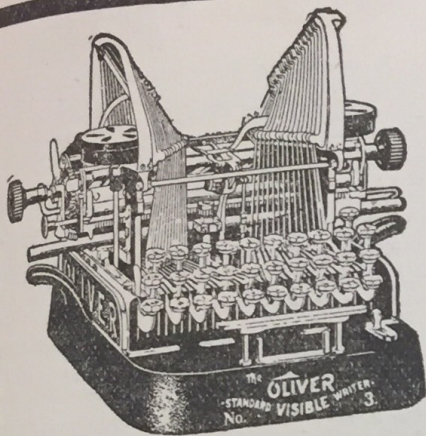

Buys This Visible Typewriter

Here is the offer that astounded the typewriter world:

The Famous Model No. 3 Oliver— The machine with the type bars that strike downward—that makes the “write-in-sight” principle mechanically practical. It is so simple children learn to operate it in ten minutes—so fast the experts choose it—so strong a shrewd business man insists upon it—The World’s Standard.

You Can Make It Yours So Easy— it’s a shame to do without it.

No Cash Until You See It— until you try it in your home or office, then you make your decision—no salesmen to influence or hurry you—if you keep it you pay only \$5.00 down—it will earn its own way thereafter.

Stop Paying in Nine Months, Only \$50 in All— no interest—no chattel mortgages—no collectors—no publicity—no delay. Positively the best typewriter value ever given—the best selling plan ever devised.

If You Own a Typewriter Now—

trade it in to us as first payment—we will be liberal with you.

Send your name and address on coupon and we will tell you more about this unusual offer—more about this splendid typewriter—it won’t cost you anything and you will be under no obligation—we won’t send a salesman.

Tear out the coupon now—you might forget.

**Typewriters Distributing
Syndicate
159 ME N. STATE STREET
CHICAGO**

Typewriters Distributing Syndicate

159 ME N. State St., Chicago

You may send without placing me under any obligation, further information of your typewriter offer.

NAME.....

ADDRESS.....

My old machine is a.....No.




E. I. CO

The Electro "Government" Phones

Highest Precision Phones Made in the United States.

(Adopted by several Governments.)

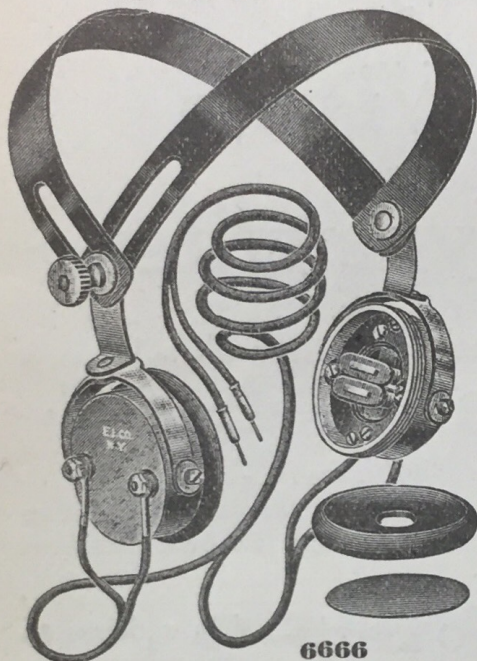

6666

We have sold more Wireless Telephone Receivers during the past nine years than all the rest of our competitors combined, and while we thought that our No. 1305 Phones could not be improved in any way, we have had right along a demand for a higher price receiver and after experimenting for two years we have at last gotten out a high grade professional type which eclipses anything shown heretofore.

We still maintain that our No. 1305 Phones cannot be matched for the price anywhere and today the same as years ago, they hold their own against receivers selling from \$13.00 all the way up to \$20.00 a set.

The difference between our "Government" phones and the 1305 type is merely in workmanship.

The receiver shells are made of aluminum which makes them considerably lighter than other sets. The diaphragm is not enameled. It is plain metal but is of an extraordinary thin dimension, which increases the sound quite a little.

The magnets are wound with No. 50 B. & S. SINGLE SILK COVERED WIRE. NOT enameled wire.

The magnets are a great deal more powerful, being made of the best imported Swedish steel, which we guarantee.

The Magnetic power of this receiver is the highest of any and the entire head-gear can be lifted up by its own magnetic power, a thing which no other set can accomplish.

We lay particular stress on the magnets of this receiver and we guarantee that the magnets will not lose their strength for two years. We realize a wireless telephone receiver is not better than the strength of its magnets, hence we have extended all our energies towards producing something that can be relied upon, practically indefinitely.

While this head gear is the lightest on the market to-day we have not sacrificed its efficiency, as may be easily ascertained when testing out the sets.

Each receiver is wound to 1500 ohms per set. The head band is of German Silver, nickel plated and highly polished.

Other points of superiority: Light rubber cap (not composition), highest insulation, not only inside of the windings, to insure against breakdown, but the headgear is entirely insulated from the phones themselves.

The swivel arrangement is of the latest approved style, so that the phones will fit the ear snugly to exclude all external noise.

We use a six-foot pure silk covered cord with two tips.


GUARANTEE

Buy a pair of these phones and if it is not as sensitive and not as satisfactory as any set you have ever seen or if it does not compare in efficiency with any other make return it to us and we will give credit for same at once.

No. 6666. Electro "Government" Phones, as described, \$7.75

The Gernsback Rotary Variable Condenser

(Patent Pending)

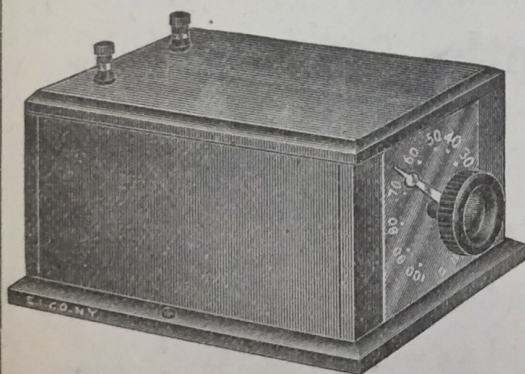

3500

We confess that our line of wireless apparatus has failed to be as complete as we desired in the past, for we lacked a rotary variable condenser. Many of our patrons and our competitors wondered why we did not place on the market a rotary condenser using the regular intersecting plates, but we appreciated the disadvantages of these condensers, preferring to avoid selling them. The rotary plate condensers possess a landslide of faults, which may be briefly outlined as follows: They short-circuit when subjected to a heavy blow or jar; they lose their adjustment after long use and short-circuit; they require constant mechanical attention, often jamming and becoming useless; owing to the air gap of sufficient size by necessity between the plates, the capacity is very low compared to the size; the plates being sharp edged, cause much leakage of the receiving currents with the corresponding loss of range; cannot be used horizontally which makes adjustment very crude and tiresome to the operator; many others which are too well known to mention in this limited space. We use an entirely new mechanical principle of operation eliminating ALL the defects of the rotary plate type.

As will be seen by the cut of the rotary condenser, the working parts are entirely encased in a neat oak box, finished in the natural grain and highly polished. A large rubber handle is used for manipulating the condenser, while a pointer indicates the proportion of the total capacity in circuit, on a neat scale. Two of our hard rubber binding posts are used on top of the box to make the connection to the receiving set. The apparatus being entirely contained in the oak case, makes the condenser dust-proof.

As for the working parts, it may be stated that these are far simpler and more perfect than those of any other variable condenser.

It is fool-proof, nothing being in sight or exposed so that it may be tampered with. Our variable condenser will work in any position. We have made the apparatus with the handle on the side, so that the arm of the operator may be rested while adjusting the condenser, giving greater accuracy, and less effort in the manipulation. No tightening screw or nut is needed to hold the adjustment at one place. It is self regulating and holds any adjustment after the handle has been left at the point desired. No amount of shaking or vibration can affect the adjustment. Finally, it is the best condenser at any price on the market, and you cannot afford to use the others if you wish the maximum efficiency.


CAPACITY .01 MICROFARAD

Size, 9 1/2 x 6 x 4 1/2 inches. Weight, 2 1/2 lbs. As usual we lead—others follow—and copy. \$4.00

No. 3500. Gernsback Rotary Variable Condenser (patents pending).....

NEWS

PORTABLE CASES.

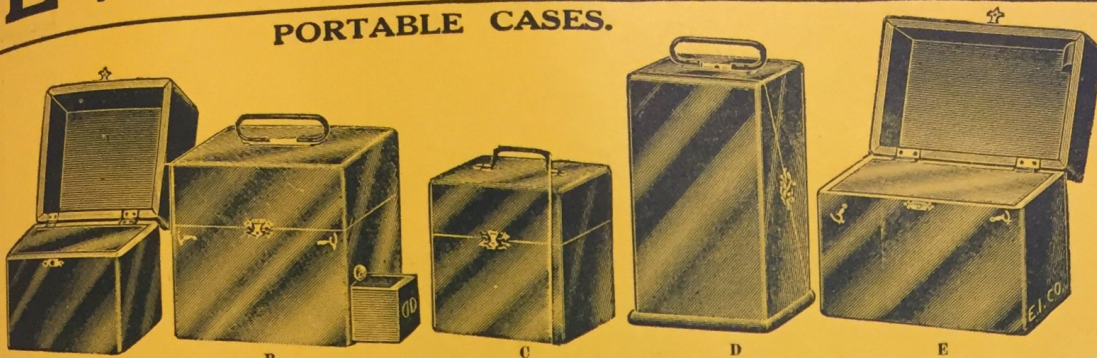


We have bought the entire supply of portable boxes from a large New York concern who used to make medical apparatus and we have on hand now several hundred boxes which we positively are selling 25 PER CENT. BELOW THEIR ORIGINAL COST.

If you can prove to us that you can get any of these boxes within 30 per cent. of the price at what we are offering them, we will give you any box you may select **FOR NOTHING**. These boxes are all of high grade hardwood, and the ones marked mahogany are of the best genuine mahogany. The finish is of a high order, hand rubbed and polished throughout; all boxes have well rounded corners. Each box has a fine nickel plated heavy carrying handle and fasteners, and the box is guaranteed to be **ABSOLUTELY NEW AND UNUSED**. All boxes have an inside removable top cover on which instruments may be fastened. These boxes are the greatest bargain we ever offered and we doubt whether we will have many of them left at the end of this month. If any one of the sizes are sold out, your money will be returned to you, if you wish it.

These boxes make very handsome portable wireless instrument cases and we have been selling a lot of them at our New York retail store for some time, but they can of course be used for all kinds of other purposes and most every experimenter will find good use for at least one of the boxes as shown. On account of the weight of these cases none can be sent by mail; they must go by express or if a sufficient large order is given at a time, they may go by freight. We will cheerfully refund the purchase price on these boxes if they are not absolutely as represented by us.

ALL DIMENSIONS GIVEN ARE OUTSIDE MEASUREMENTS.

Style A.	6 1-2 inches high, 6 inches wide and 6 5-8 inches long (mahogany).....	Price, 75 Cents.
Style B.	7 inches high, 7 1-4 inches wide and 7-1-2 inches long (birch, with extra bottom drawer).....	Price, 85 Cents.
Style C.	6 inches high, 5 inches wide and 5 1-2 inches long (mahogany).....	Price, 50 Cents.
Style D.	10 inches high, 6 inches wide and 5 3-4 inches long (mahogany, diagonal opening).....	Price, 65 Cents.
Style E.	7 1-4 inches high, 7 1-2 inches wide and 9 1-2 inches long (mahogany).....	Price, 95 Cents.
Style F.	Not illustrated. 7 inches high, 5 1-2 inches wide and 6 5-8 inches long (mahogany).....	Price, 75 Cents.

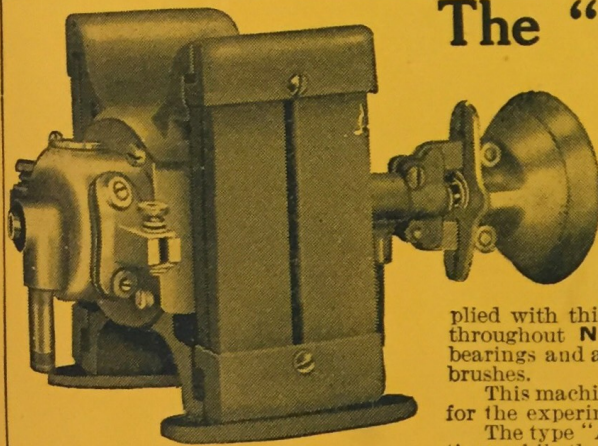

The "Electro" Generator

This is a brand new article and it is with pride that we introduce it to our friends. This is one of the most powerful machines ever constructed and the magnets are made of Tungsten Steel having an astonishing strength.

This machine is constructed to run on low speed of 1800 revolutions and our Type "A" at this speed will develop a voltage of 16 to 18 and from 4 1/2 to 5 amperes guaranteed.

The type "B" at the same speed develops 5 1/2 to 6 volts and 14 to 15 amperes.

A leather friction pulley with governor is supplied with this machine and it is built honestly and strongly throughout **NOT A TOY**. There are two generous oil-cups, large bearings and a carefully made commutator with copper woven brushes.

This machine runs with astonishing ease and is just the thing for the experimenter or for the practical man.

The type "A" will run from 6 to 7 1/2-Volt Tungsten lamps at a time, while the type "B" will run from 15 to 16 1/2-Volt 2 C.P. lights.

GUARANTEE: Buy this machine and if it is not all what we claim in any respect your money will be refunded without question.

This machine can be run either from surplus power of a gasoline engine or else from a powerful water motor or any other sufficient power.

Price is the same for either type, A or B

INTRODUCTION PRICE \$9.80

Immediate shipments guaranteed.

PHOSPHOR BRONZE AERIAL WIRE

Specifications: 7 strands No. 22 B&S Phosphor Bronze Wire. Will stand a rupture test of over 800 lbs. As long as the supply lasts we will sell this wire at the rate of 90c Per Hundred Feet. Not less than 100 feet sold. At the old rate the price of 100 feet was \$1.50.

Order at once. Prompt shipments guaranteed.

We announce the greatest sale of Phosphor Bronze Aerial Wire ever held in this country. This wire is sold all over at 1 1/2 c a foot. We have bought 500,000 feet from one of the largest concerns in the business and offer the wire at **Unheard of Prices**.

Above illustrations show A FEW of the thousands of articles we manufacture and sell. We offer to-day the best value for your money in the U. S. **Lowest Price High Grade Goods** in America. Get acquainted and send to-day for

OUR NEW 196 PAGE ELECTRICAL CYCLOPEDIA

Cat. No. 10

containing over 400 ILLUSTRATIONS just issued. The most wonderful book ever printed. We offer to-day the best value for your money in the U. S. **Lowest Price High Grade Goods** in America. Get acquainted and send to-day for

THE ELECTRO IMPORTING CO.
"EVERYTHING FOR THE EXPERIMENTER"
233-Z FULTON ST., NEW YORK
Retail Store, 69 West Broadway

Name.....
Address.....
City.....

I enclose herewith 4c stamp for which please send me your 196 Page Electrical Encyclopedia No. 10 at once.





E are the largest manufacturers of
devices for making fastenings to
BRICK and **STONE**.

Our goods are carried in stock by all the better electrical supply houses and dealers; and by hardware dealers.

When you have occasion to attach some fixture to material other than wood, just try a Sebco Expansion Bolt or Screw Anchor — you can get them anywhere.

If you want free samples and catalogue, write to us.

STAR EXPANSION BOLT COMPANY

148 CEDAR STREET

NEW YORK CITY

When writing, please mention "Modern Electrics."